



LOAD PERFORMANCE PARAMETERS


负载性能参数

以下数据为室温 25°C、海平面高度的环境下，变化油门输入调节拉力测得。电机温度为65%油门下电机运行10分钟温度。

Under the environment of sea level altitude, the data above is measured in room temperature of 25°C.

The throttle input is able to adjust the tension, and the motor temperature is the temperature of the rated throttle running for 10 minutes.

H6M & 22*7.8"

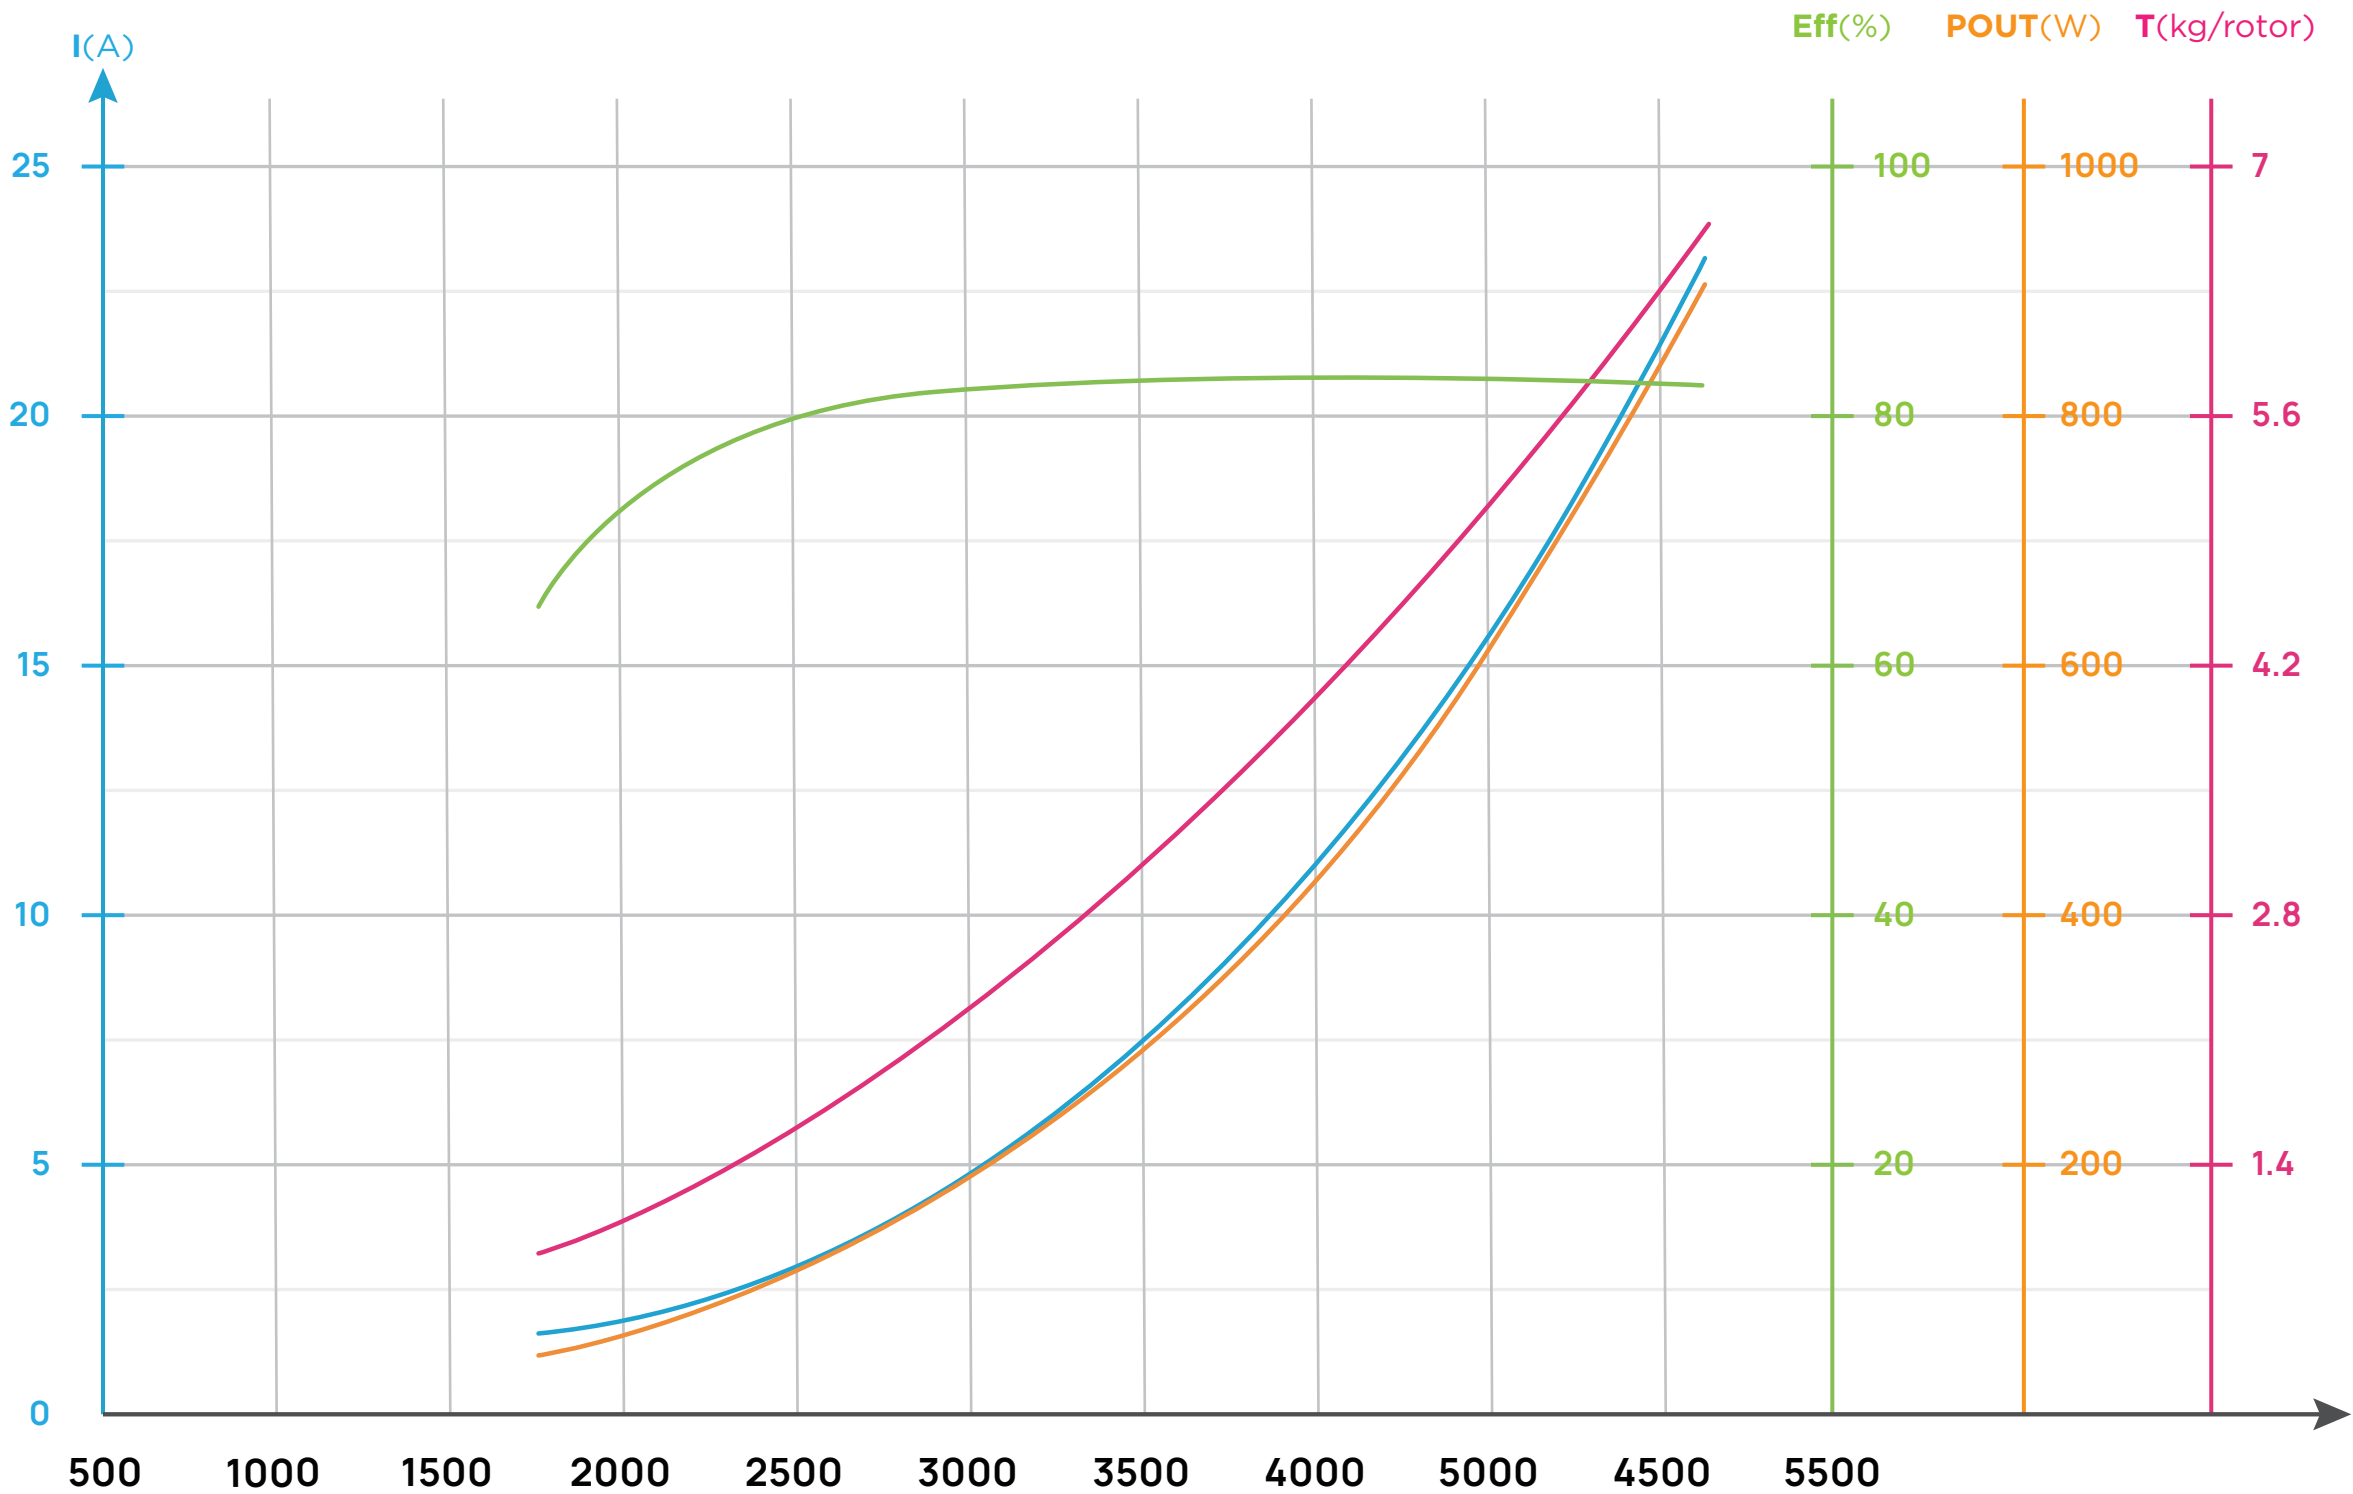

Voltage(V) 工作电压	Propeller 螺旋桨	Throttle(%) 油门	Thrust(g) 拉力	Current(A) 电流	Power Input(W) 输入功率	Speed(RPM) 转速	Power Output(W) 输出功率	Efficiency(g/W) 力效	Temperature(°C) 电机机壳温度
48V (12SLipo)	22*7.8"	30%	805	1.3	63.5	1819	56	12.7	50.0°C
		33%	955	1.6	74.8	1983	66	12.8	
		36%	1175	2.0	94.7	2206	83	12.4	
		39%	1385	2.4	116.7	2400	103	11.9	
		42%	1635	3.0	146.1	2612	129	11.2	
		45%	1895	3.7	179.8	2814	158	10.5	
		48%	2235	4.7	227.8	3054	200	9.8	
		51%	2505	5.6	268.5	3230	236	9.3	
		54%	2765	6.4	309.6	3389	272	8.9	
		57%	3060	7.5	358.3	3559	315	8.5	
		60%	3300	8.3	399.4	3691	352	8.3	
		63%	3695	9.8	470.1	3896	414	7.9	
		66%	3935	10.7	515.0	4014	453	7.6	
		69%	4305	12.2	587.0	4189	517	7.3	
		72%	4575	13.4	641.9	4310	565	7.1	
		75%	4820	14.4	693.5	4417	610	7.0	
		78%	5220	16.3	781.3	4583	688	6.7	
		81%	5505	17.6	846.5	4696	745	6.5	
		84%	5685	18.5	888.6	4767	782	6.4	
		87%	6010	20.1	966.4	4893	850	6.2	
		90%	6335	21.8	1045.6	5019	920	6.1	
		100%	6570	23.0	1103.1	5113	971	6.0	