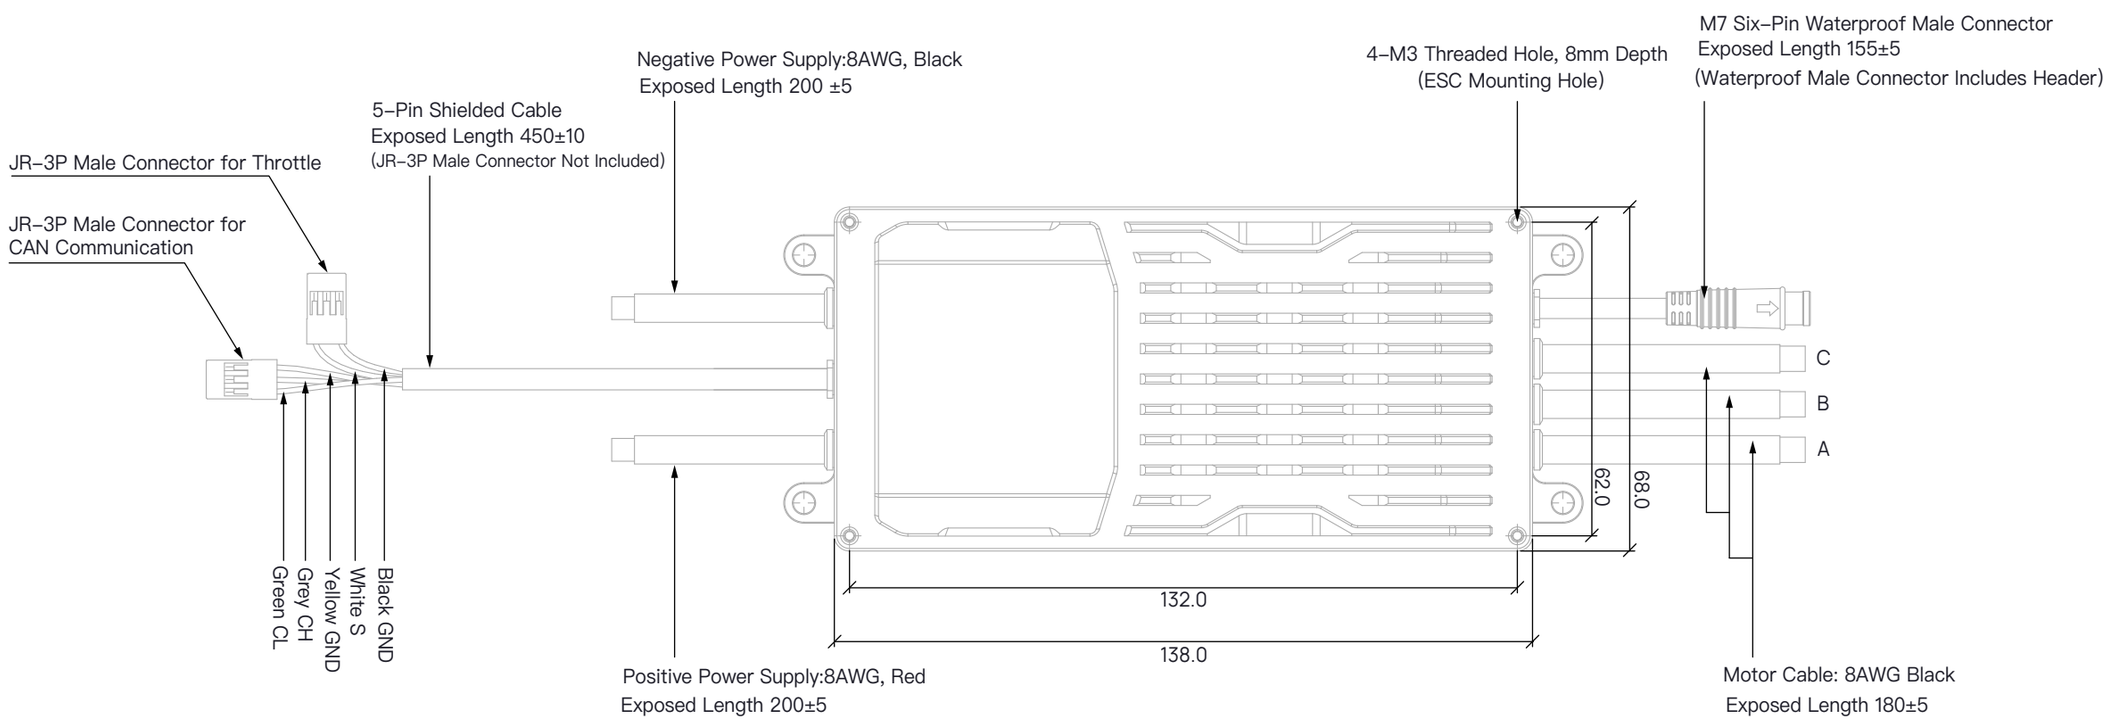
Negative Power Supply:8AWG, Black
Exposed Length 200 ±5
4-M3 Threaded Hole, 8mm Depth
(ESC Mounting Hole)
M7 Six-Pin Waterproof Male Connector
Exposed Length 155±5
(Waterproof Male Connector Includes Header)
5-Pin Shielded Cable
Exposed Length 450±10
(JR-3P Male Connector Not Included)
JR-3P Male Connector for Throttle
JR-3P Male Connector for
CAN Communication
C
B
A
62.0
68.0
Green CL
Grey CH
Yellow GND
White S
Black GND
132.0
138.0
Positive Power Supply:8AWG, Red
Exposed Length 200±5
Motor Cable: 8AWG Black
Exposed Length 180±5

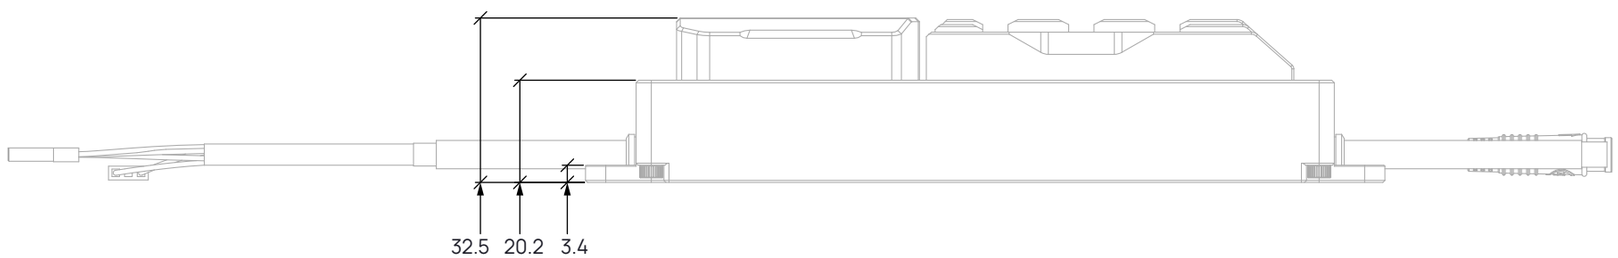
32.5
20.2
3.4

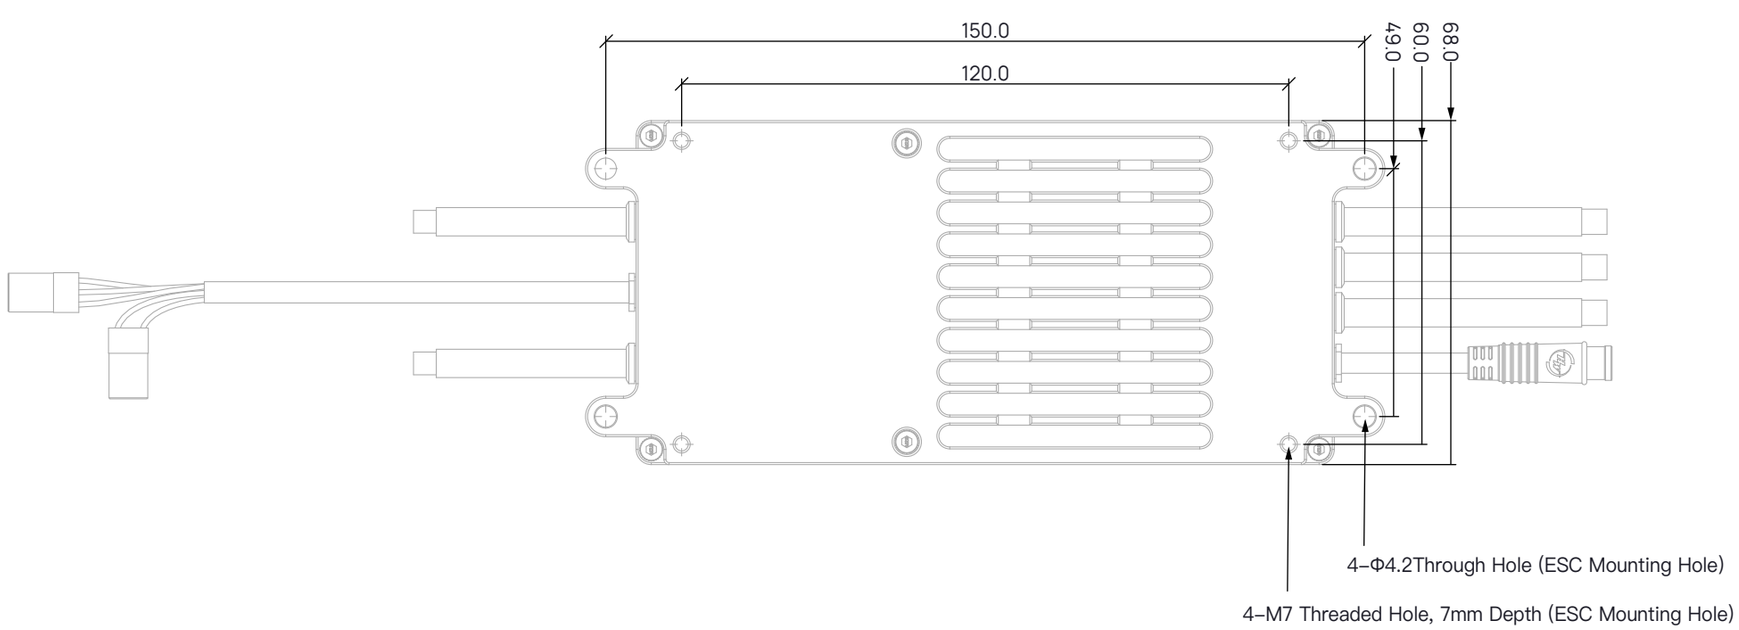
150.0
120.0
49.0
60.0
68.0
4-Φ4.2Through Hole (ESC Mounting Hole)
4-M7 Threaded Hole, 7mm Depth (ESC Mounting Hole)