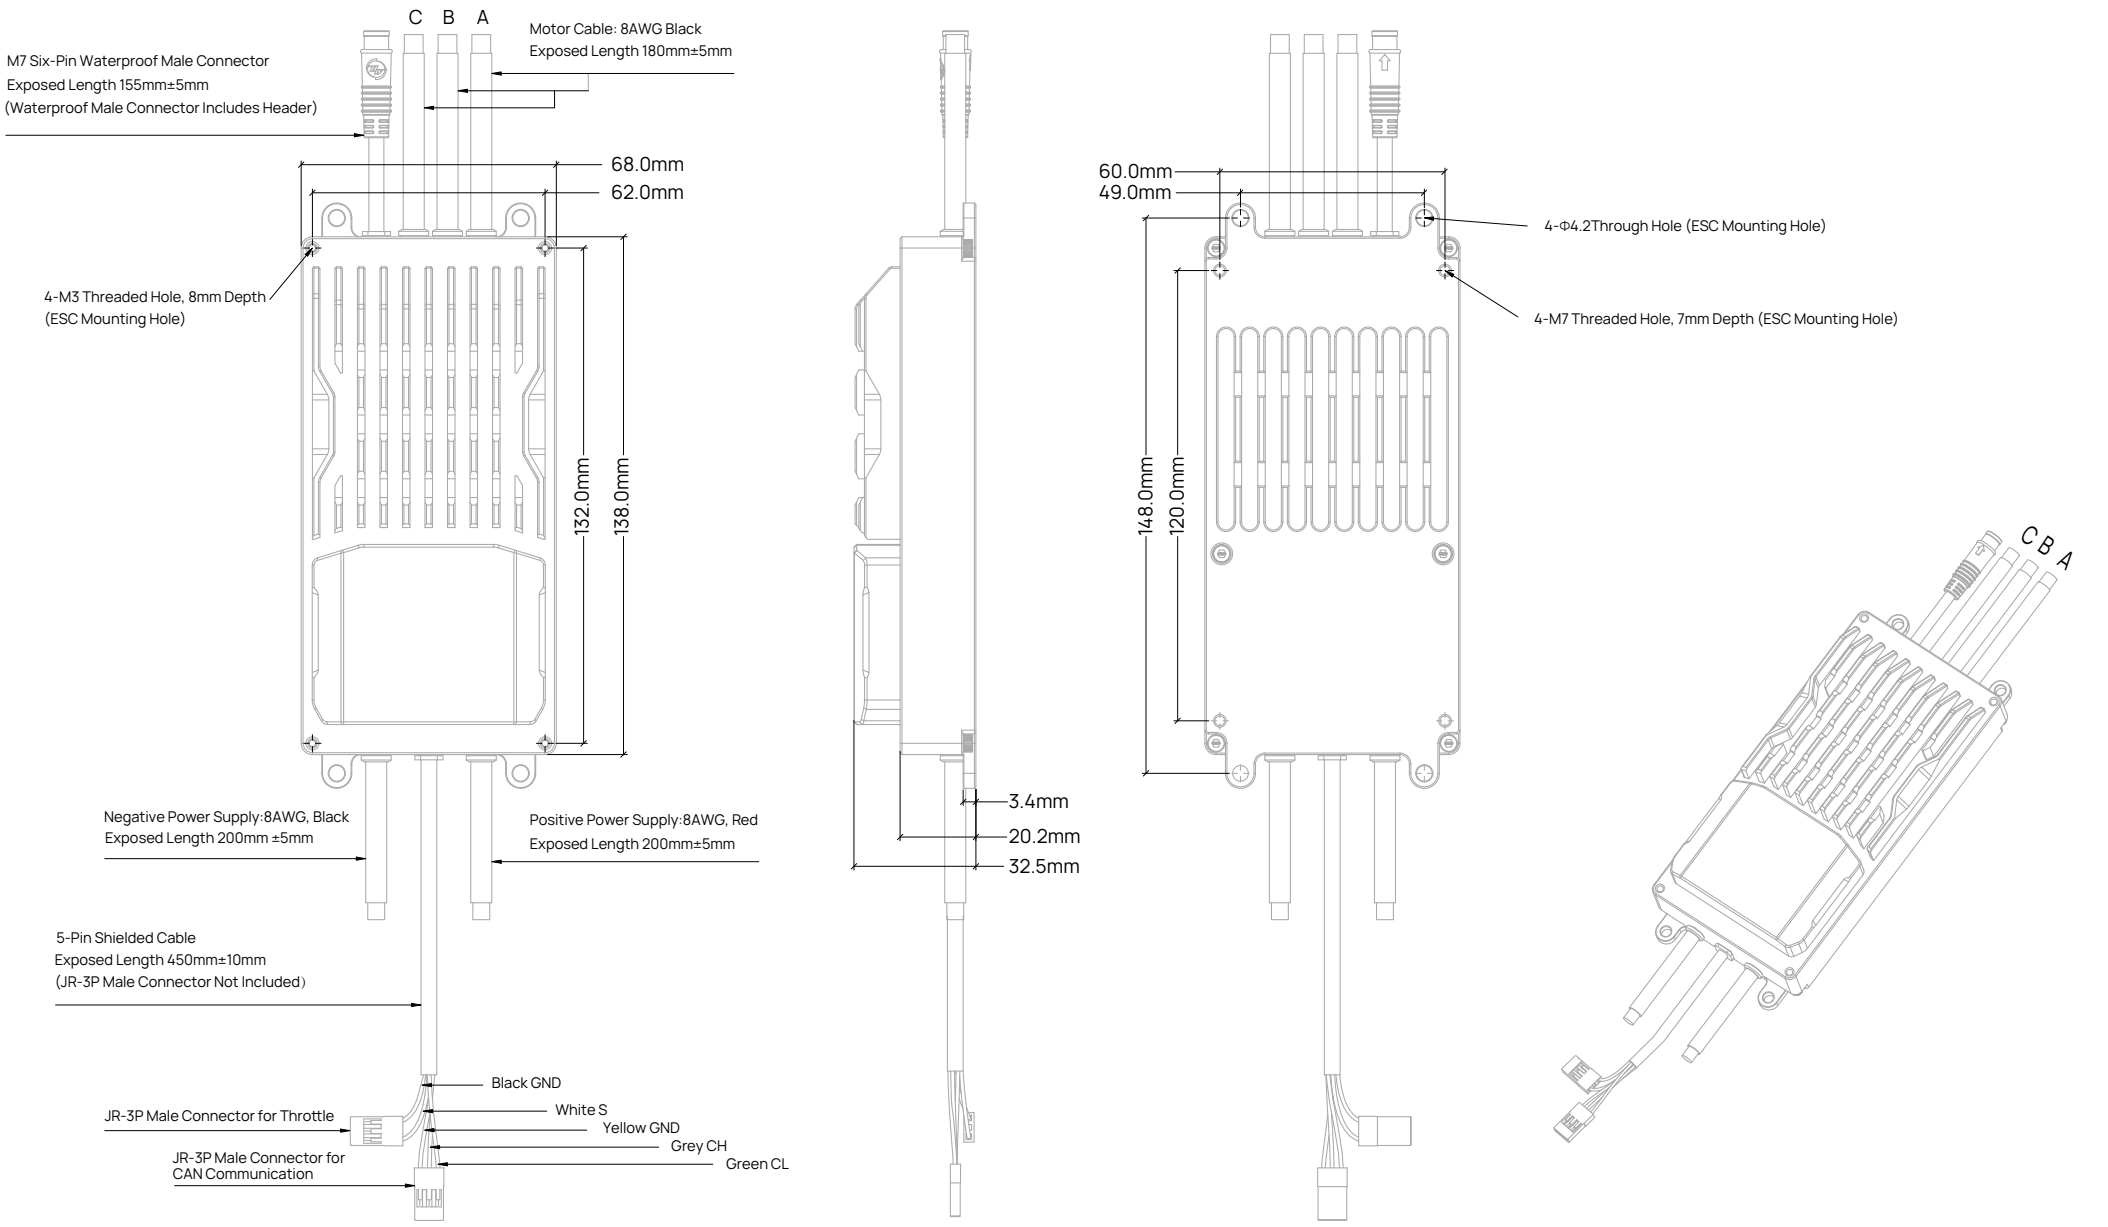
C B A
Motor Cable: 8AWG Black
Exposed Length 180mm±5mm
M7 Six-Pin Waterproof Male Connector
Exposed Length 155mm±5mm
(Waterproof Male Connector Includes Header)
68.0mm
62.0mm
4-M3 Threaded Hole, 8mm Depth
(ESC Mounting Hole)
132.0mm
138.0mm
Negative Power Supply:8AWG, Black
Exposed Length 200mm ±5mm
Positive Power Supply:8AWG, Red
Exposed Length 200mm±5mm
5-Pin Shielded Cable
Exposed Length 450mm±10mm
(JR-3P Male Connector Not Included)
Black GND
JR-3P Male Connector for Throttle
White S
Yellow GND
Grey CH
JR-3P Male Connector for
CAN Communication
Green CL
3.4mm
20.2mm
32.5mm
60.0mm
49.0mm
4-Φ4.2Through Hole (ESC Mounting Hole)
4-M7 Threaded Hole, 7mm Depth (ESC Mounting Hole)
148.0mm
120.0mm
C B A