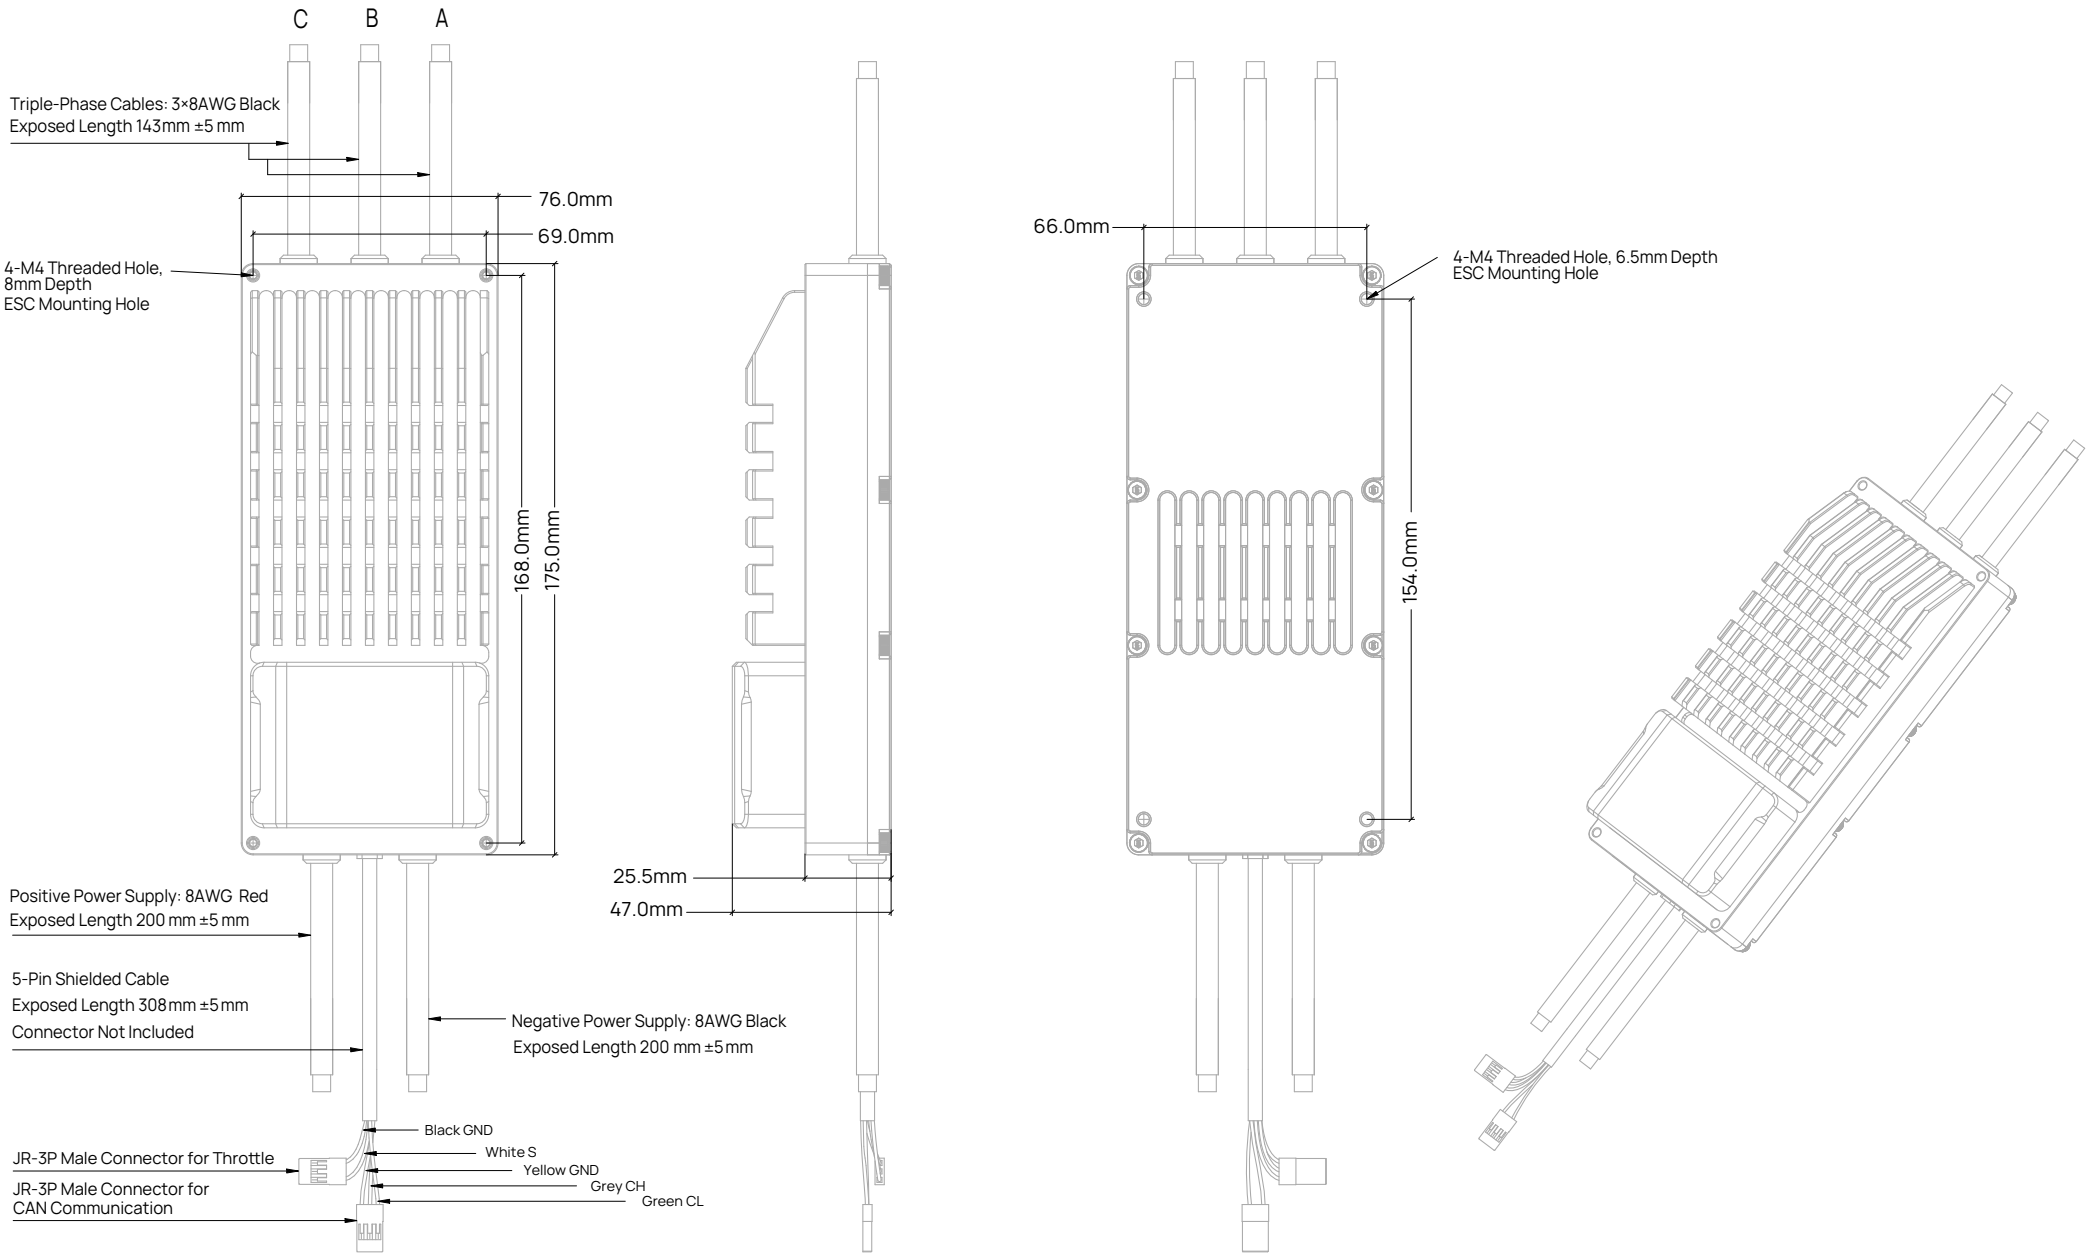
C
B
A
Triple-Phase Cables: 3×8AWG Black
Exposed Length 143mm ±5 mm
76.0mm
69.0mm
4-M4 Threaded Hole,
8mm Depth
ESC Mounting Hole
168.0mm
175.0mm
25.5mm
47.0mm
66.0mm
4-M4 Threaded Hole, 6.5mm Depth
ESC Mounting Hole
154.0mm
Positive Power Supply: 8AWG Red
Exposed Length 200 mm ±5 mm
5-Pin Shielded Cable
Exposed Length 308mm ±5mm
Connector Not Included
Negative Power Supply: 8AWG Black
Exposed Length 200 mm ±5mm
Black GND
White S
Yellow GND
Grey CH
Green CL
JR-3P Male Connector for Throttle
JR-3P Male Connector for
CAN Communication