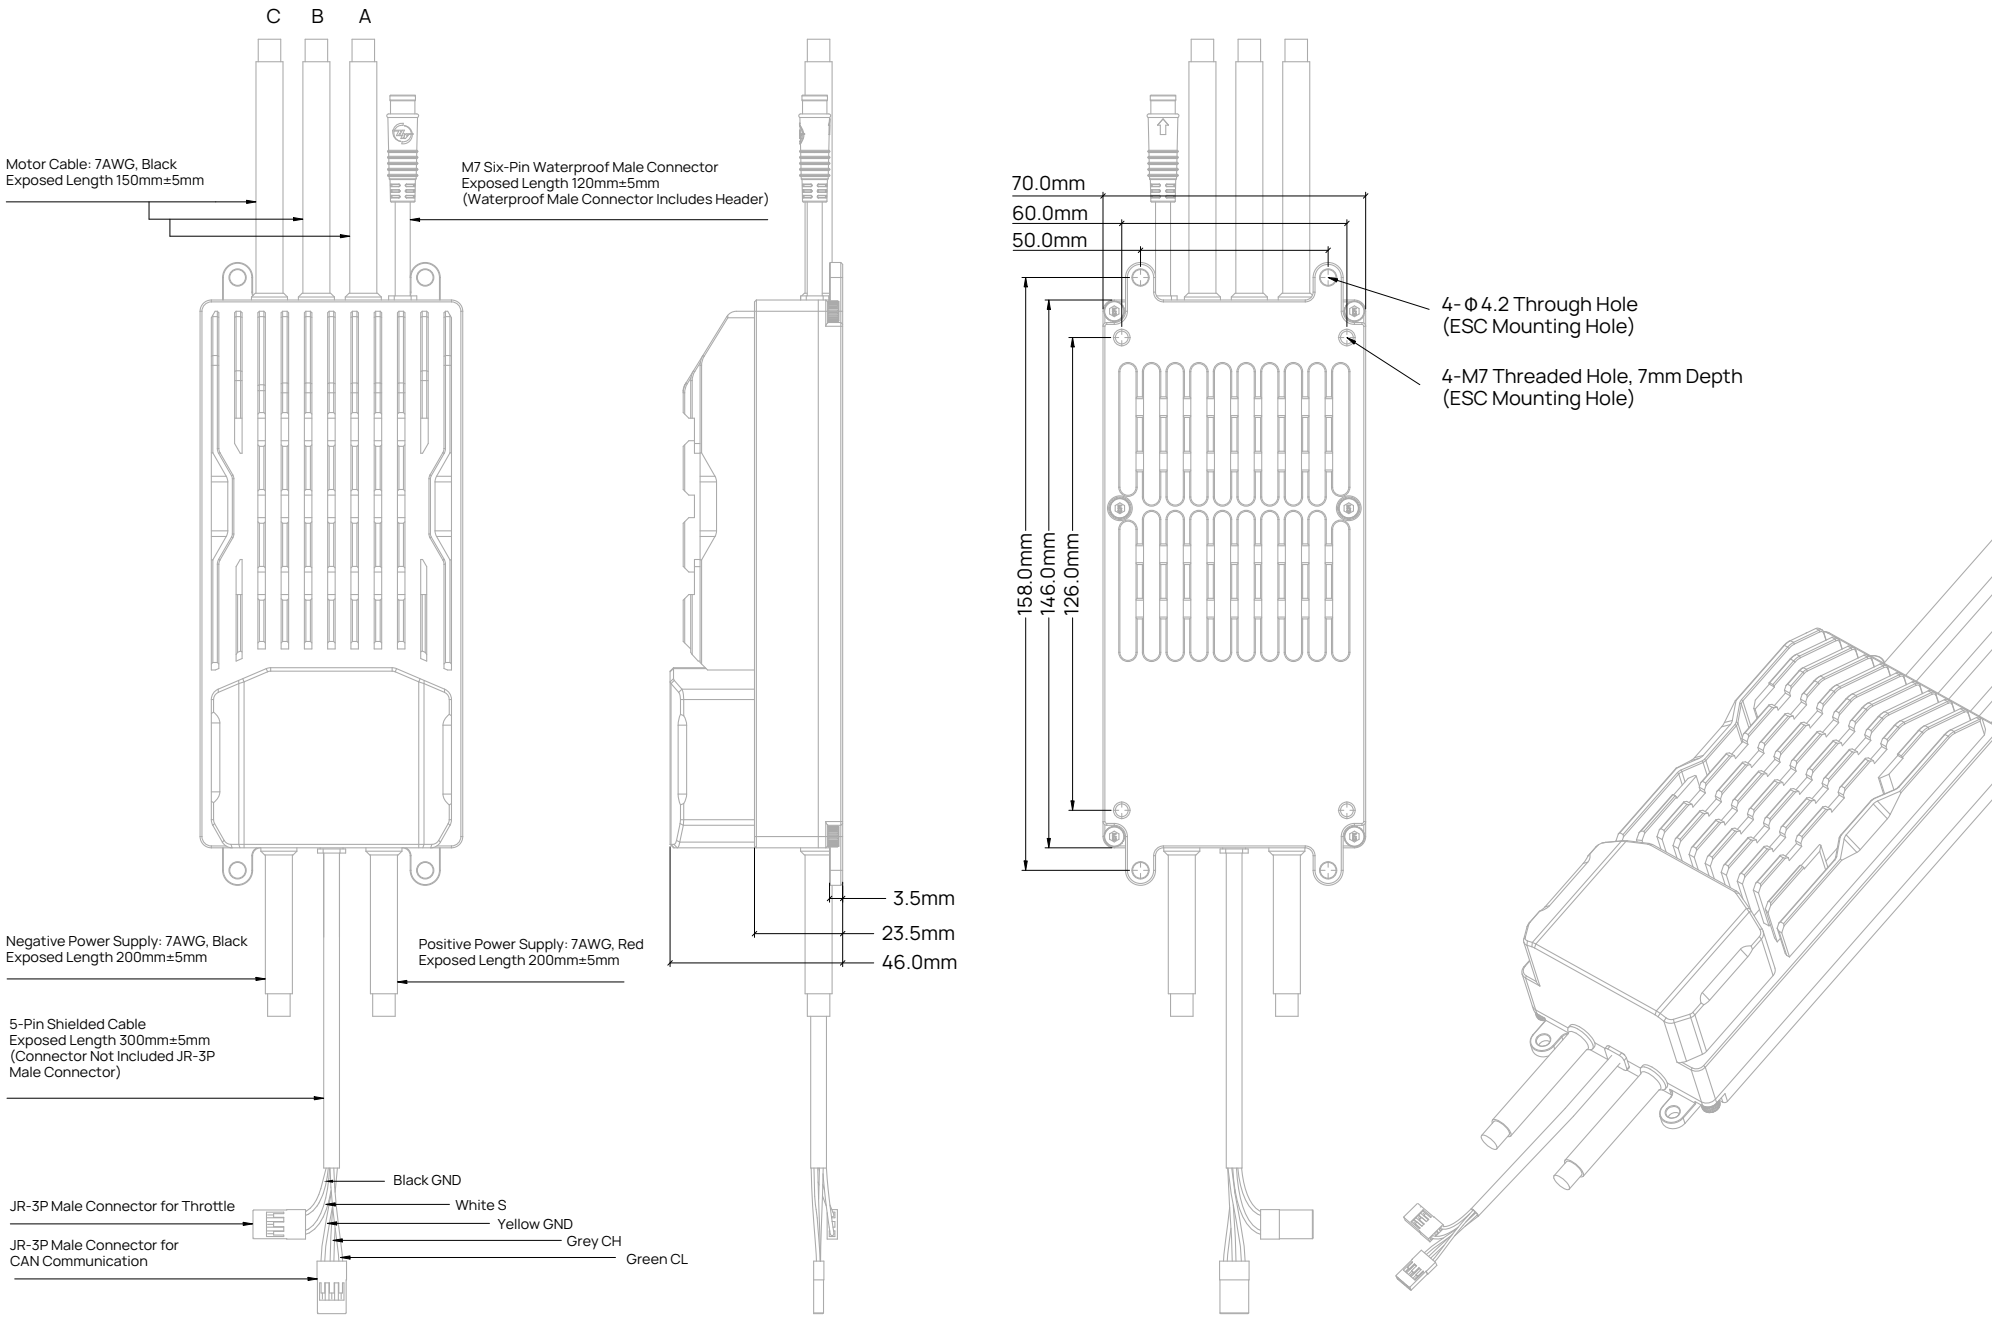
C
B
A
Motor Cable: 7AWG, Black
Exposed Length 150mm±5mm
M7 Six-Pin Waterproof Male Connector
Exposed Length 120mm±5mm
(Waterproof Male Connector Includes Header)
3.5mm
23.5mm
46.0mm
Negative Power Supply: 7AWG, Black
Exposed Length 200mm±5mm
Positive Power Supply: 7AWG, Red
Exposed Length 200mm±5mm
5-Pin Shielded Cable
Exposed Length 300mm±5mm
(Connector Not Included JR-3P
Male Connector)
Black GND
White S
Yellow GND
Grey CH
Green CL
JR-3P Male Connector for Throttle
JR-3P Male Connector for
CAN Communication
70.0mm
60.0mm
50.0mm
158.0mm
146.0mm
126.0mm
4-Φ4.2 Through Hole
(ESC Mounting Hole)
4-M7 Threaded Hole, 7mm Depth
(ESC Mounting Hole)