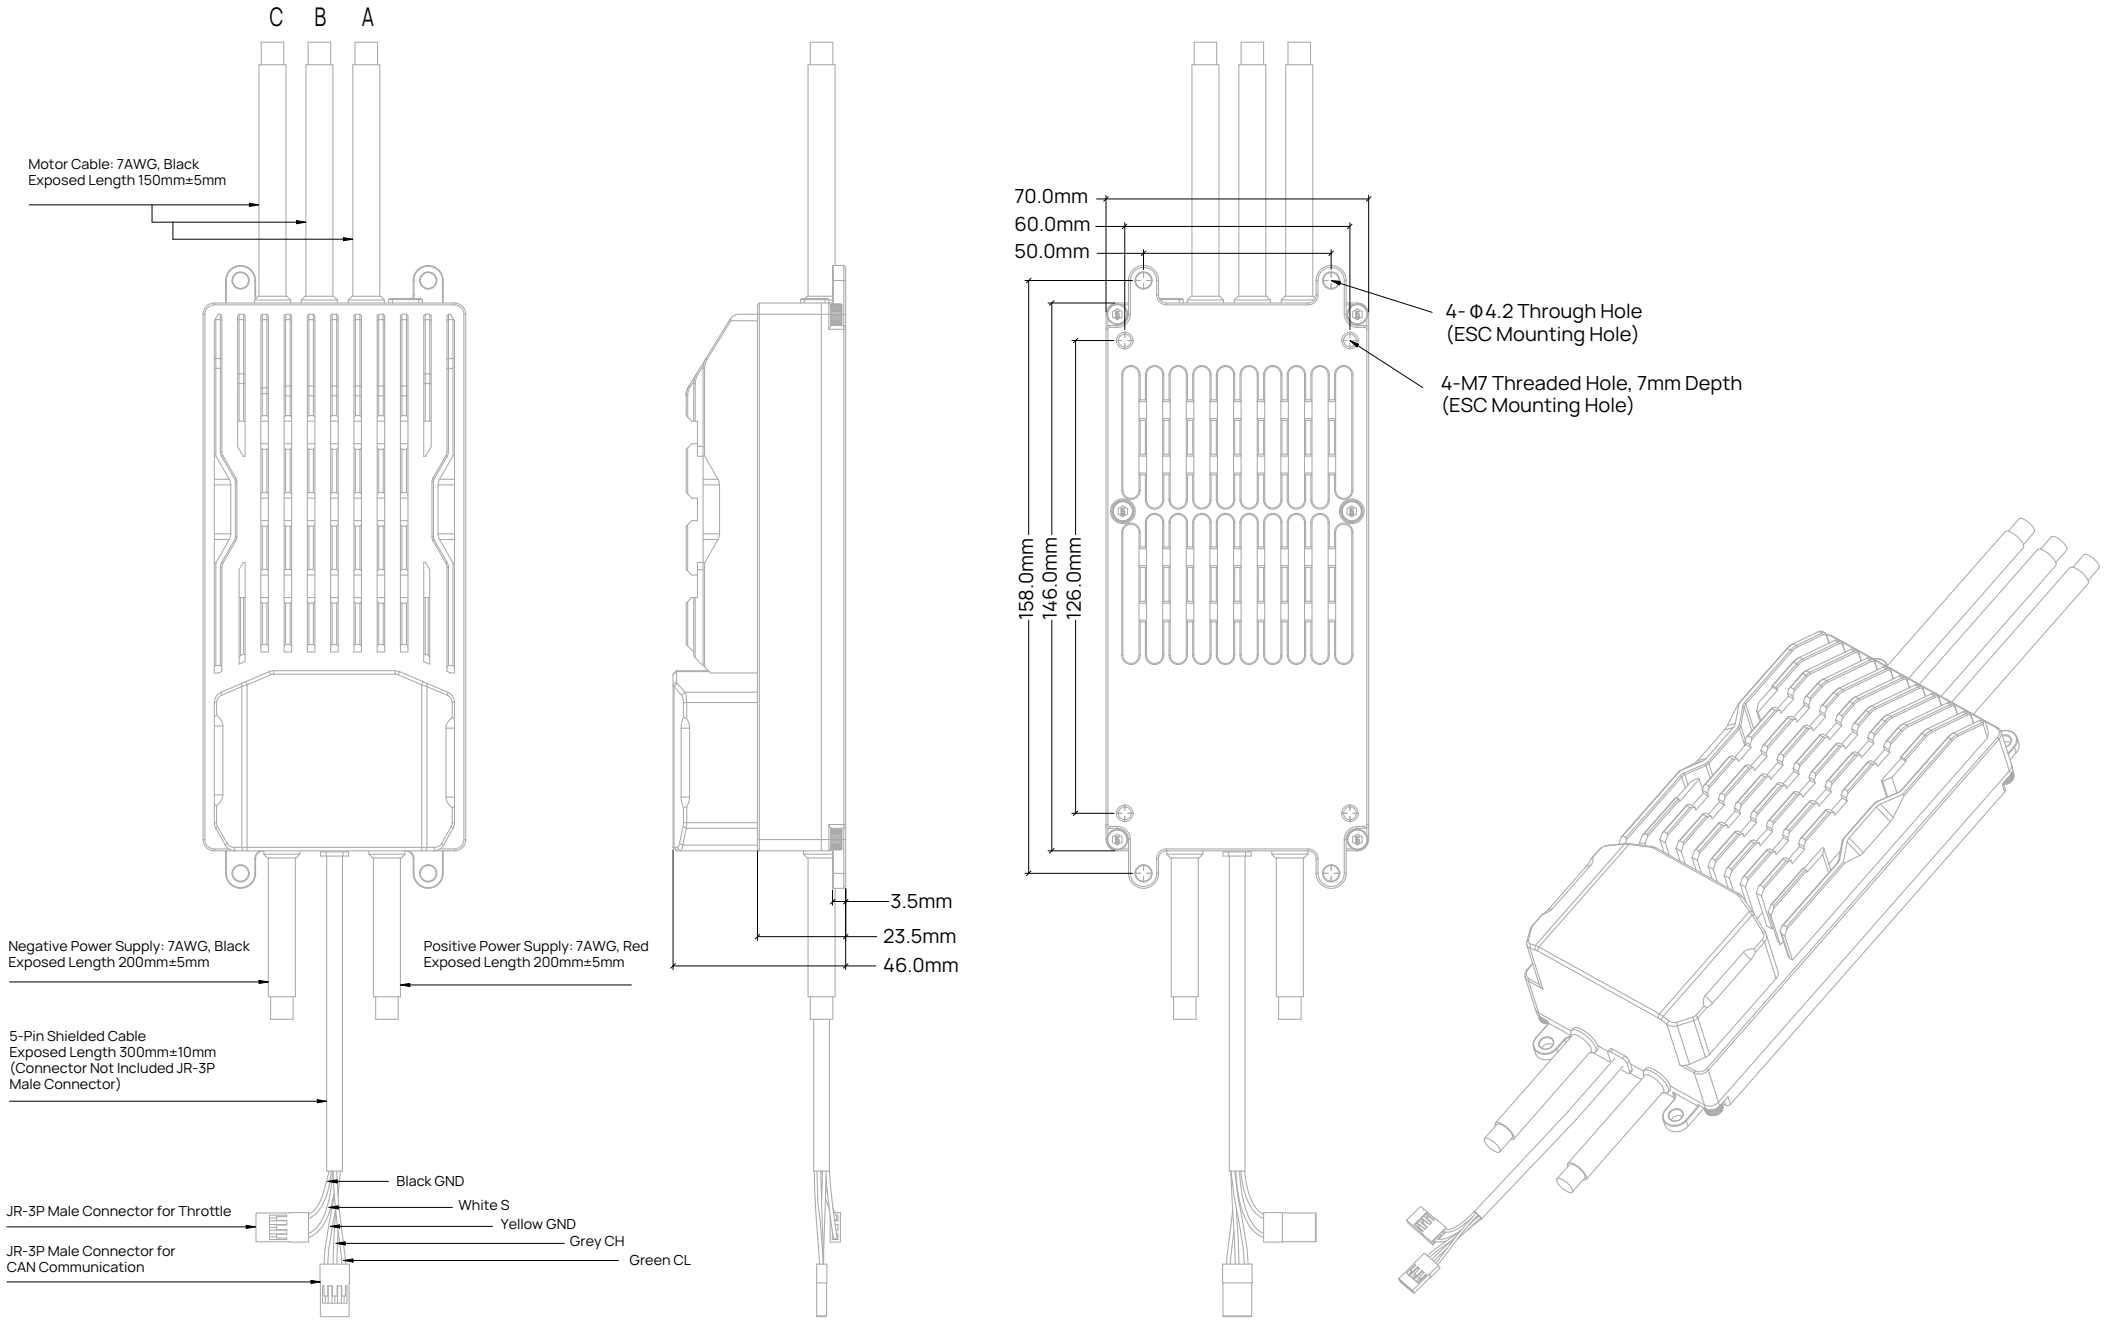
C B A
Motor Cable: 7AWG, Black
Exposed Length 150mm±5mm
Negative Power Supply: 7AWG, Black
Exposed Length 200mm±5mm
Positive Power Supply: 7AWG, Red
Exposed Length 200mm±5mm
5-Pin Shielded Cable
Exposed Length 300mm±10mm
(Connector Not Included JR-3P
Male Connector)
JR-3P Male Connector for Throttle
JR-3P Male Connector for
CAN Communication
Black GND
White S
Yellow GND
Grey CH
Green CL
3.5mm
23.5mm
46.0mm
70.0mm
60.0mm
50.0mm
158.0mm
146.0mm
126.0mm
4- Φ4.2 Through Hole
(ESC Mounting Hole)
4-M7 Threaded Hole, 7mm Depth
(ESC Mounting Hole)