




LOAD PERFORMANCE PARAMETERS

负载性能参数

以下数据为好盈实验室于室温25℃、海平面高度，变化油门输入调节测得，机壳温度为90%油门运行数据，仅供参考。


The below data is measured by HobbyWing laboratory at room temperature 25℃, sea level, change the throttle input adjustment, the motor housing temperature is 90% and the throttle runs, for reference only.

C8025-160KV & 25×10

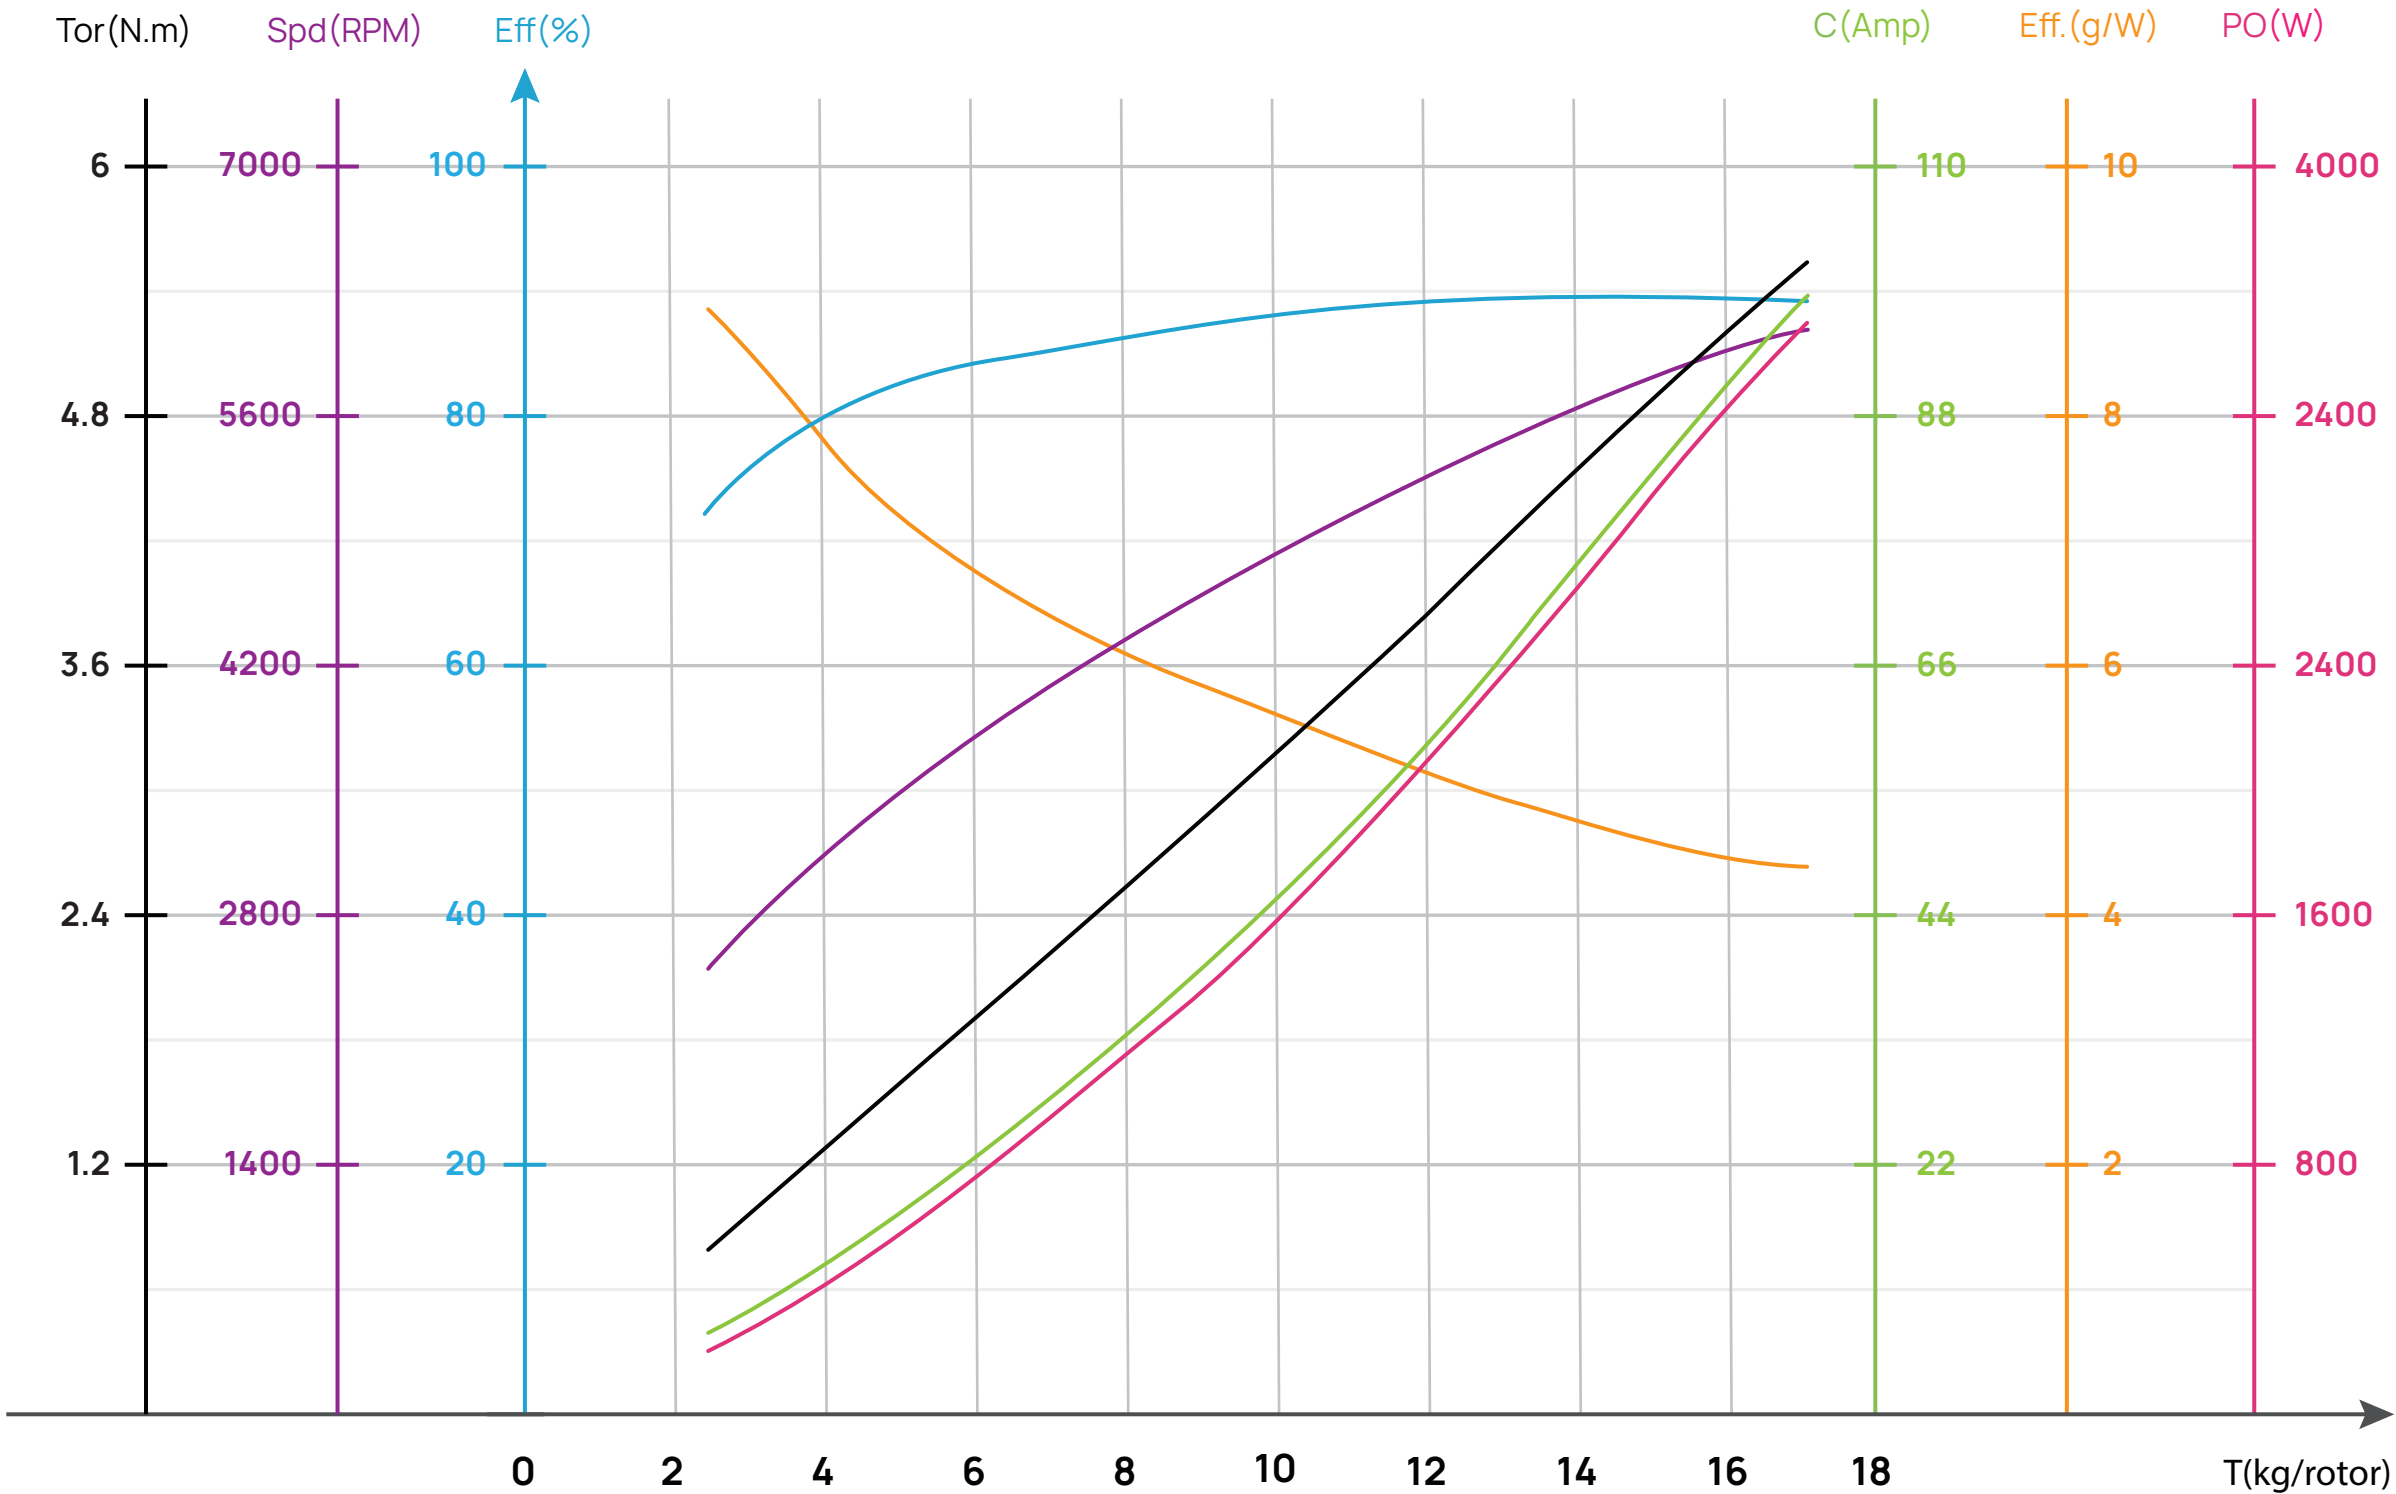


Voltage 工作电压 (V)	Propeller 螺旋桨	Throttle 油门 (%)	Thrust 拉力 (g)	Current 电流 (A)	Power Input 输入功率 (W)	Speed 转速 (RPM)	Efficiency 力效 (g/W)	Torque 扭矩 (N · m)	Power Output 输出功率 (W)	Temperature 电机温度 (°C)
40V (12S LiPo)	25*10	35%	2483	7.1	282.8	2477	8.8	0.78	202.3	/
		37%	2766	8.0	320.9	2605	8.6	0.87	237.3	
		39%	3081	9.2	366.5	2742	8.4	0.97	278.5	
		42%	3591	11.2	446.7	2952	8.0	1.13	349.3	
		45%	4129	13.4	538.4	3158	7.7	1.29	426.6	
		48%	4681	15.9	638.2	3355	7.3	1.47	516.4	
		51%	5241	18.6	744.3	3542	7.0	1.65	612.0	
		54%	5811	21.4	856.1	3719	6.8	1.83	712.6	
		57%	6394	24.3	974.7	3890	6.6	2.01	818.7	
		60%	6998	27.5	1101.2	4056	6.4	2.20	934.4	
		63%	7634	30.9	1239.1	4221	6.2	2.40	1060.8	
		66%	8311	34.7	1391.3	4389	6.0	2.61	1199.5	
		69%	9038	39.0	1561.5	4560	5.8	2.84	1356.1	
		72%	9820	43.8	1754.2	4737	5.6	3.09	1532.7	
		75%	10658	49.3	1973.0	4921	5.4	3.36	1731.4	
		78%	11549	55.4	2220.1	5110	5.2	3.66	1958.4	
		81%	12482	62.3	2493.9	5301	5.0	3.97	2203.7	
		84%	13435	69.7	2790.3	5489	4.8	4.30	2471.5	
		87%	14379	77.3	3093.9	5663	4.6	4.63	2745.5	
		90%	15272	84.5	3382.6	5812	4.5	4.93	3000.3	
		100%	17064	97.9	3920.5	6036	4.4	5.49	3469.9	

C8025-160KV & 25×10

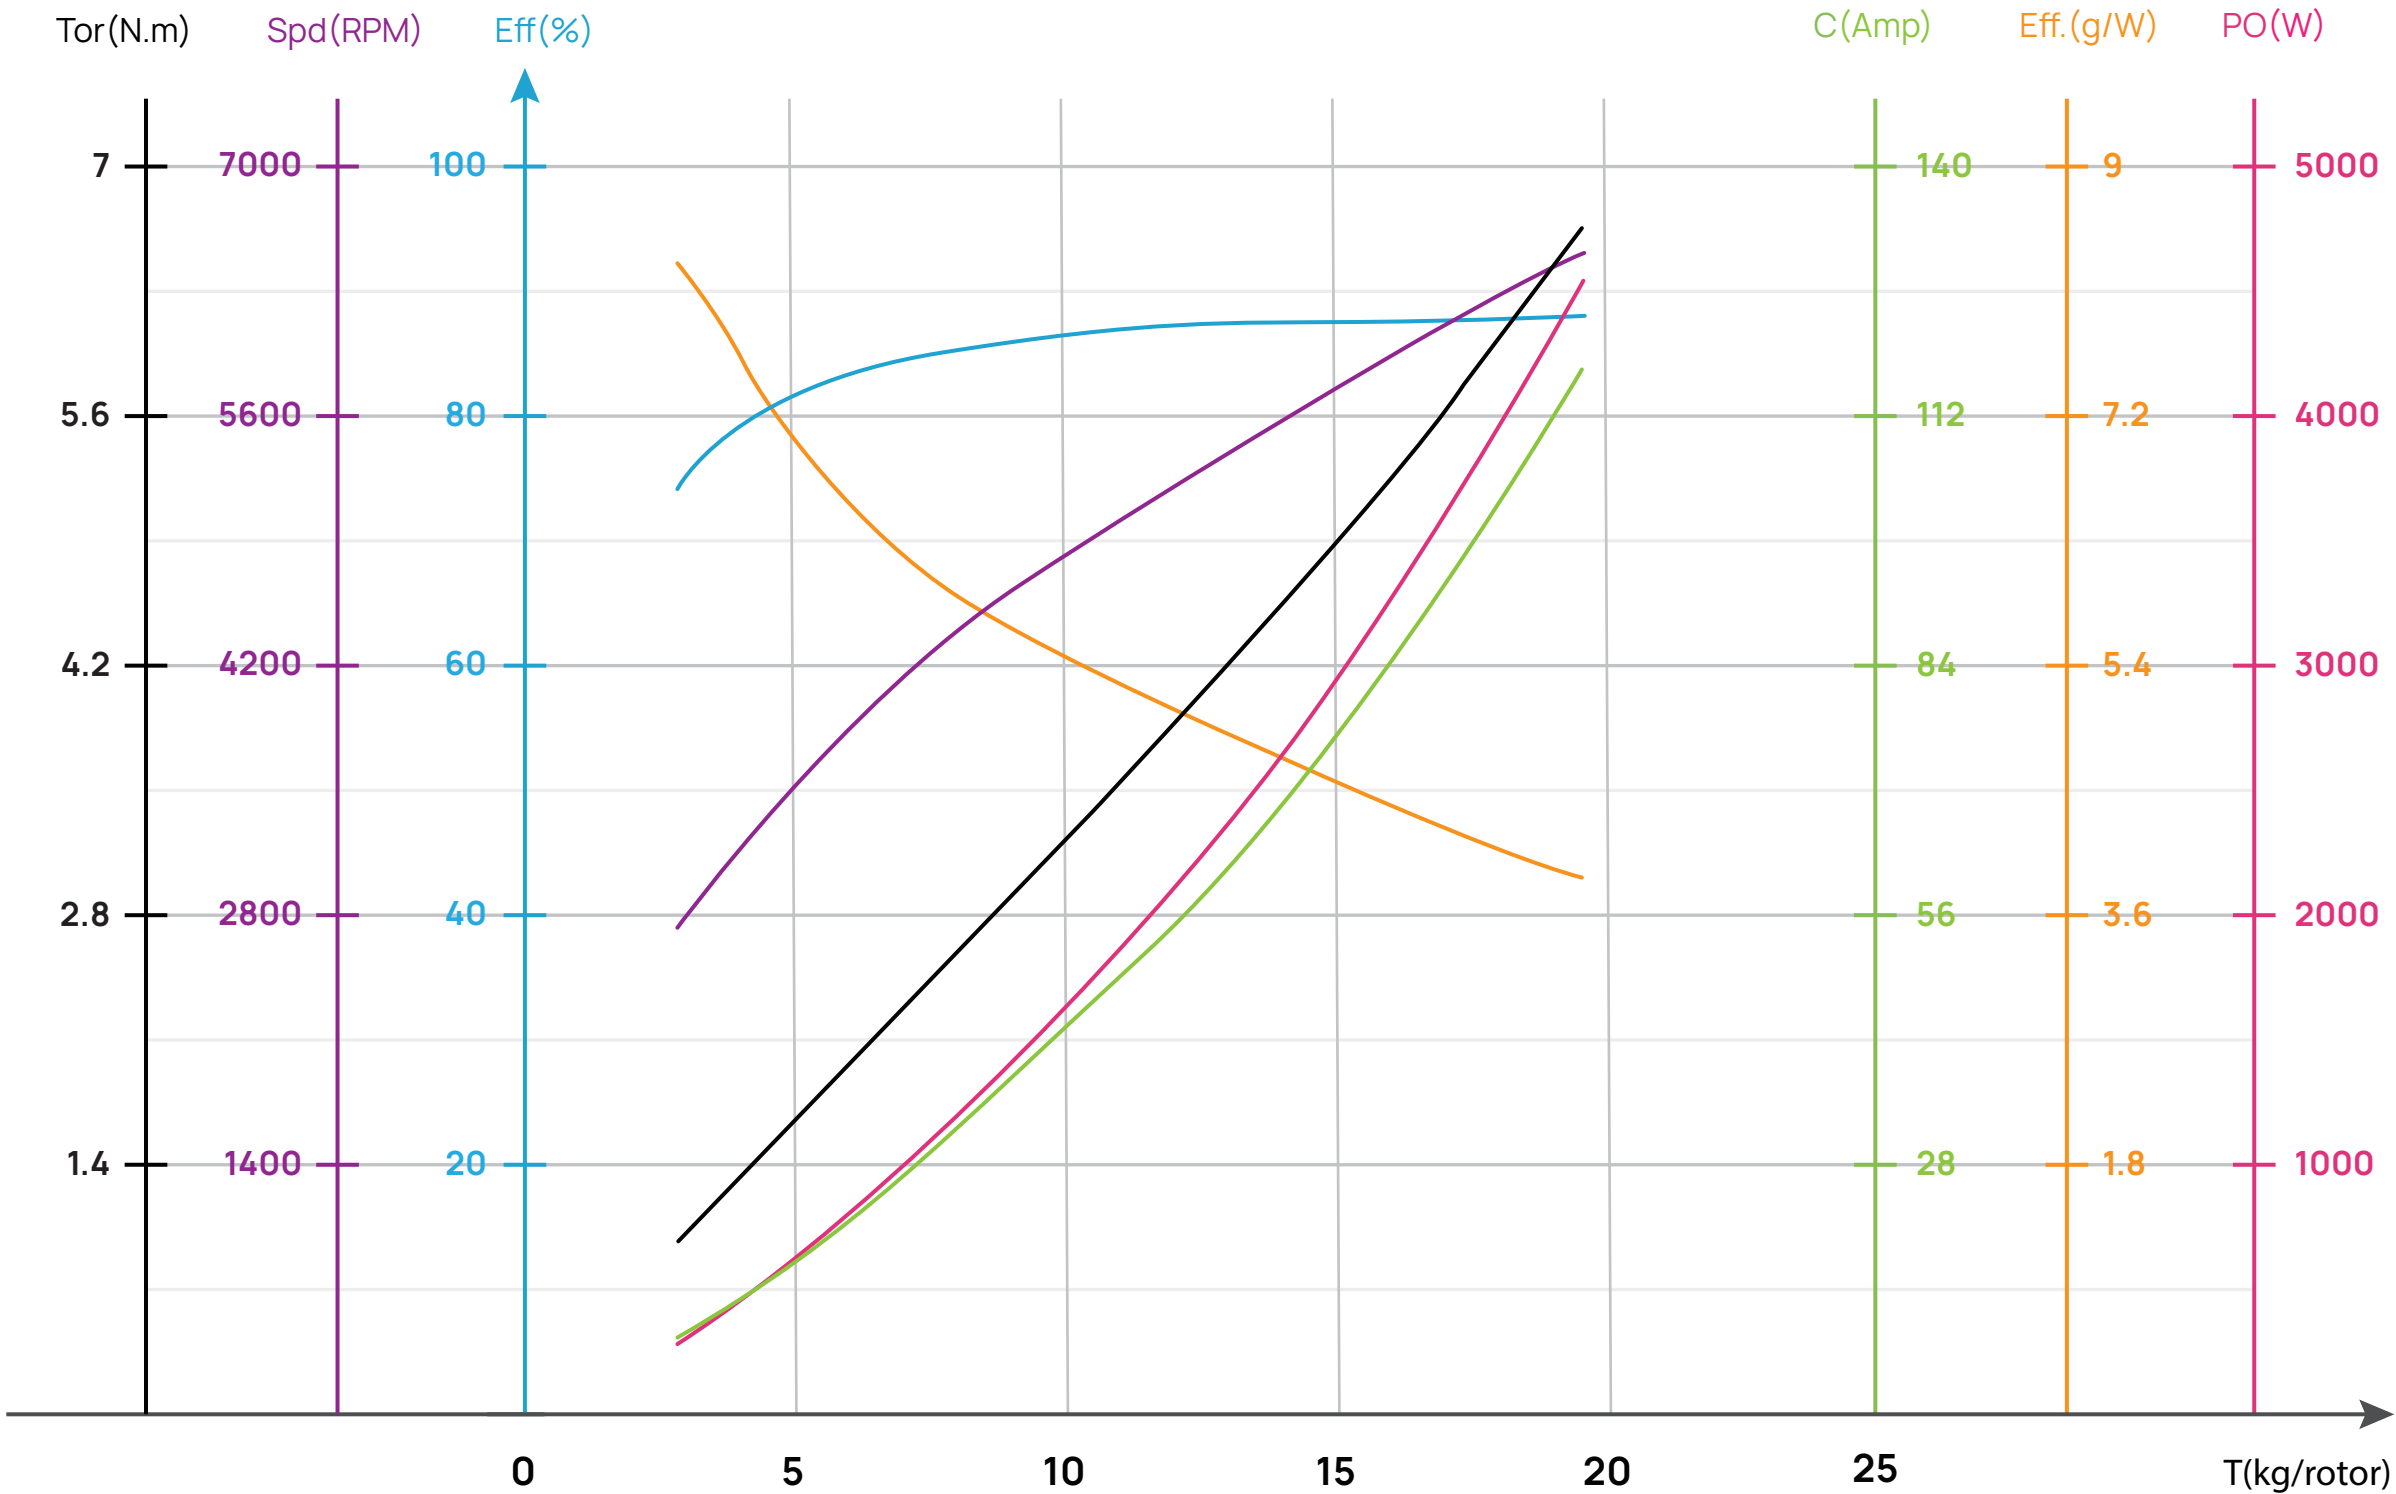


Voltage 工作电压 (V)	Propeller 螺旋桨	Throttle 油门 (%)	Thrust 拉力 (g)	Current 电流 (A)	Power Input 输入功率 (W)	Speed 转速 (RPM)	Efficiency 力效 (g/W)	Torque 扭矩 (N · m)	Power Output 输出功率 (W)	Temperature 电机温度 (℃)
44V (12S LiPo)	25×10	35%	3019	8.3	364.5	2714	8.3	0.95	270.0	/
		37%	3354	9.4	413.0	2851	8.1	1.05	313.5	
		39%	3710	10.6	469.0	2991	7.9	1.16	363.3	
		42%	4277	12.9	566.4	3204	7.6	1.34	449.6	
		45%	4874	15.4	677.1	3415	7.2	1.53	547.1	
		48%	5496	18.2	800.1	3621	6.9	1.73	656.0	
		51%	6146	21.2	934.9	3822	6.6	1.94	776.4	
		54%	6826	24.5	1081.3	4018	6.3	2.15	904.6	
		57%	7542	28.2	1240.9	4209	6.1	2.38	1048.9	
		60%	8302	32.1	1415.4	4397	5.9	2.62	1206.3	
		63%	9113	36.5	1606.7	4583	5.7	2.88	1382.1	
		66%	9980	41.3	1818.7	4768	5.5	3.15	1572.7	
		69%	10905	46.6	2054.6	4954	5.3	3.44	1784.5	
		72%	11889	52.6	2318.2	5141	5.1	3.75	2018.7	
		75%	12924	59.3	2613.5	5332	4.9	4.08	2278.0	
		78%	14000	66.8	2943.2	5526	4.8	4.44	2569.2	
		81%	15097	75.0	3305.6	5722	4.6	4.82	2888.0	
		84%	16188	83.8	3693.0	5916	4.4	5.22	3233.7	
		87%	17235	92.8	4090.2	6099	4.2	5.62	3589.1	
		90%	18189	101.4	4470.6	6260	4.1	5.99	3926.4	
		100%	19841	116.9	5153.0	6507	3.9	6.65	4531.1	

C8025-160KV & 25×10

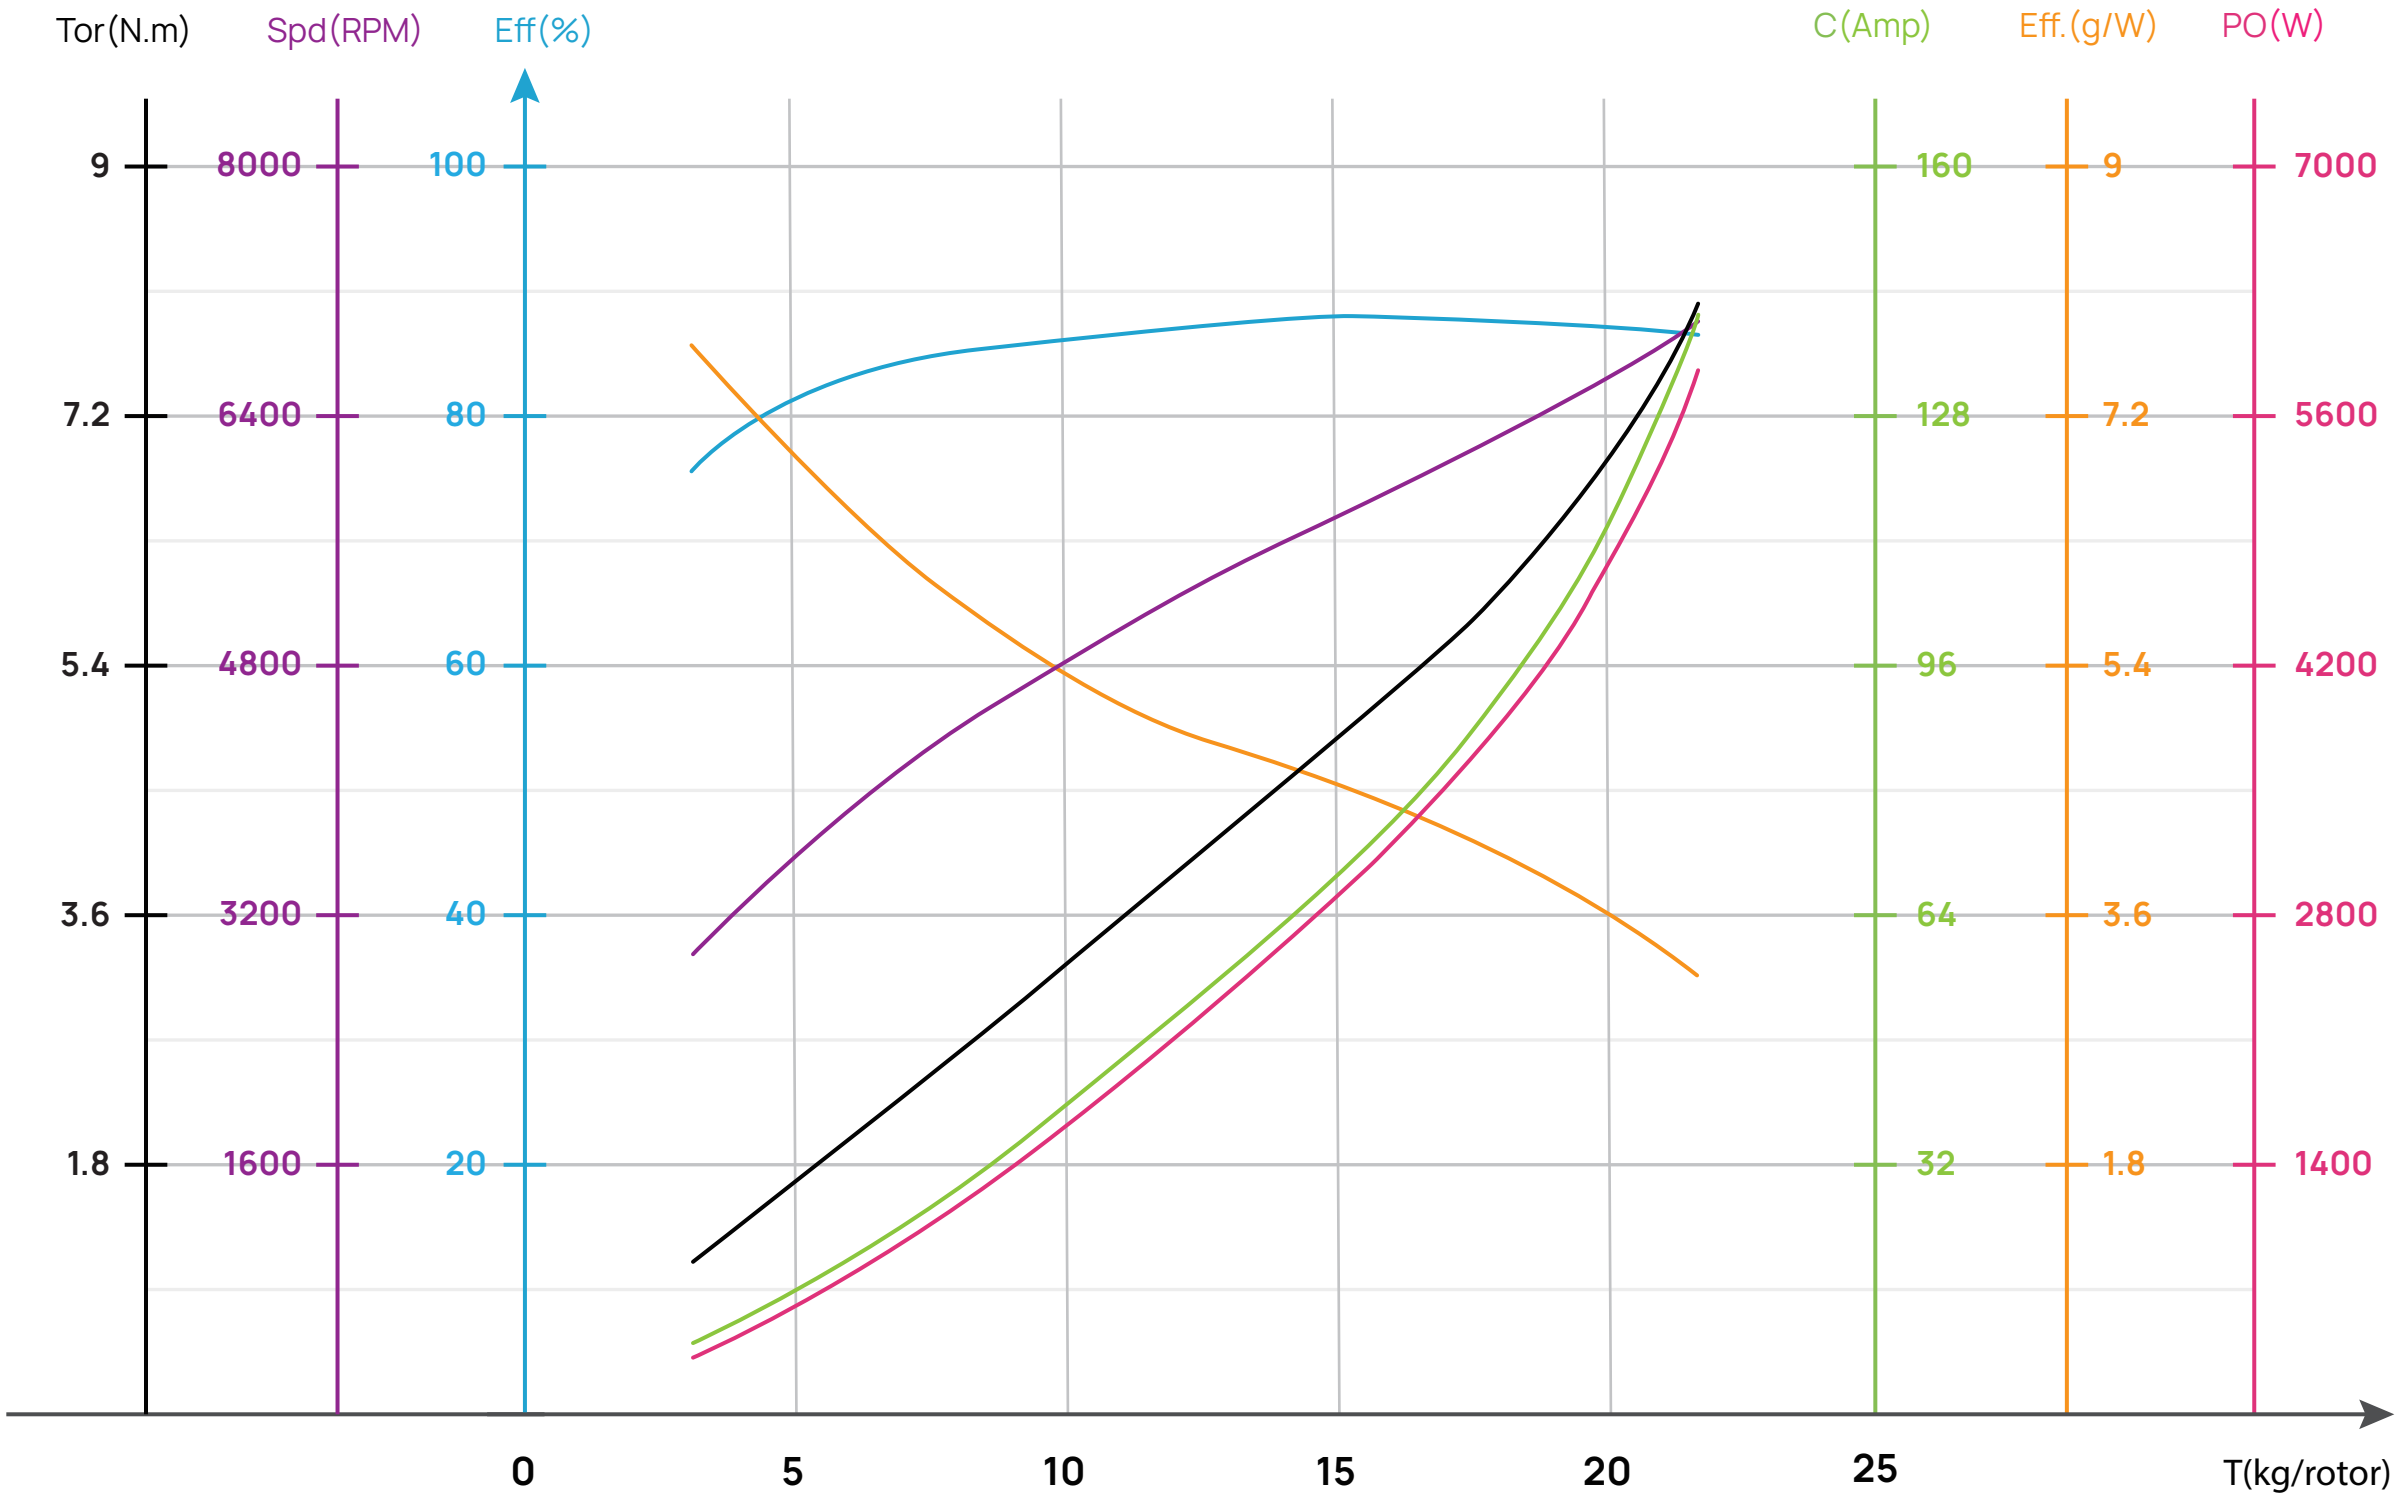


Voltage 工作电压 (V)	Propeller 螺旋桨	Throttle 油门 (%)	Thrust 拉力 (g)	Current 电流 (A)	Power Input 输入功率 (W)	Speed 转速 (RPM)	Efficiency 力效 (g/W)	Torque 扭矩 (N · m)	Power Output 输出功率 (W)	Temperature 电机温度 (℃)
48V (12S LiPo)	25×10	35%	3595	9.8	468.7	2959	7.7	1.14	353.2	87℃
		37%	3992	11.1	533.1	3106	7.5	1.26	409.8	
		39%	4403	12.5	602.3	3253	7.3	1.39	473.5	
		42%	5046	14.9	716.2	3470	7.0	1.58	574.1	
		45%	5725	17.6	845.1	3685	6.8	1.79	690.7	
		48%	6443	20.6	991.2	3897	6.5	2.02	824.3	
		51%	7205	24.1	1157.5	4108	6.2	2.26	972.2	
		54%	8015	28.0	1346.4	4318	6.0	2.52	1139.4	
		57%	8878	32.5	1559.9	4527	5.7	2.80	1327.3	
		60%	9796	37.4	1798.3	4736	5.4	3.11	1542.3	
		63%	10770	42.9	2061.7	4943	5.2	3.43	1775.3	
		66%	11799	48.9	2349.2	5150	5.0	3.77	2033.0	
		69%	12878	55.3	2659.7	5354	4.8	4.13	2315.4	
		72%	13997	62.3	2992.8	5556	4.7	4.50	2618.0	
		75%	15142	69.7	3352.4	5755	4.5	4.88	2940.8	
		78%	16295	77.9	3746.1	5952	4.4	5.27	3284.5	
		81%	17430	87.1	4185.5	6147	4.2	5.70	3668.9	
		84%	18515	97.4	4680.1	6341	4.0	6.15	4083.5	
		87%	19510	108.8	5228.1	6532	3.7	6.64	4541.6	
		90%	20367	120.6	5798.7	6710	3.5	7.14	5016.7	
		100%	21516	140.5	6755.8	6980	3.2	7.97	5825.2	

C8025-160KV & 26×12

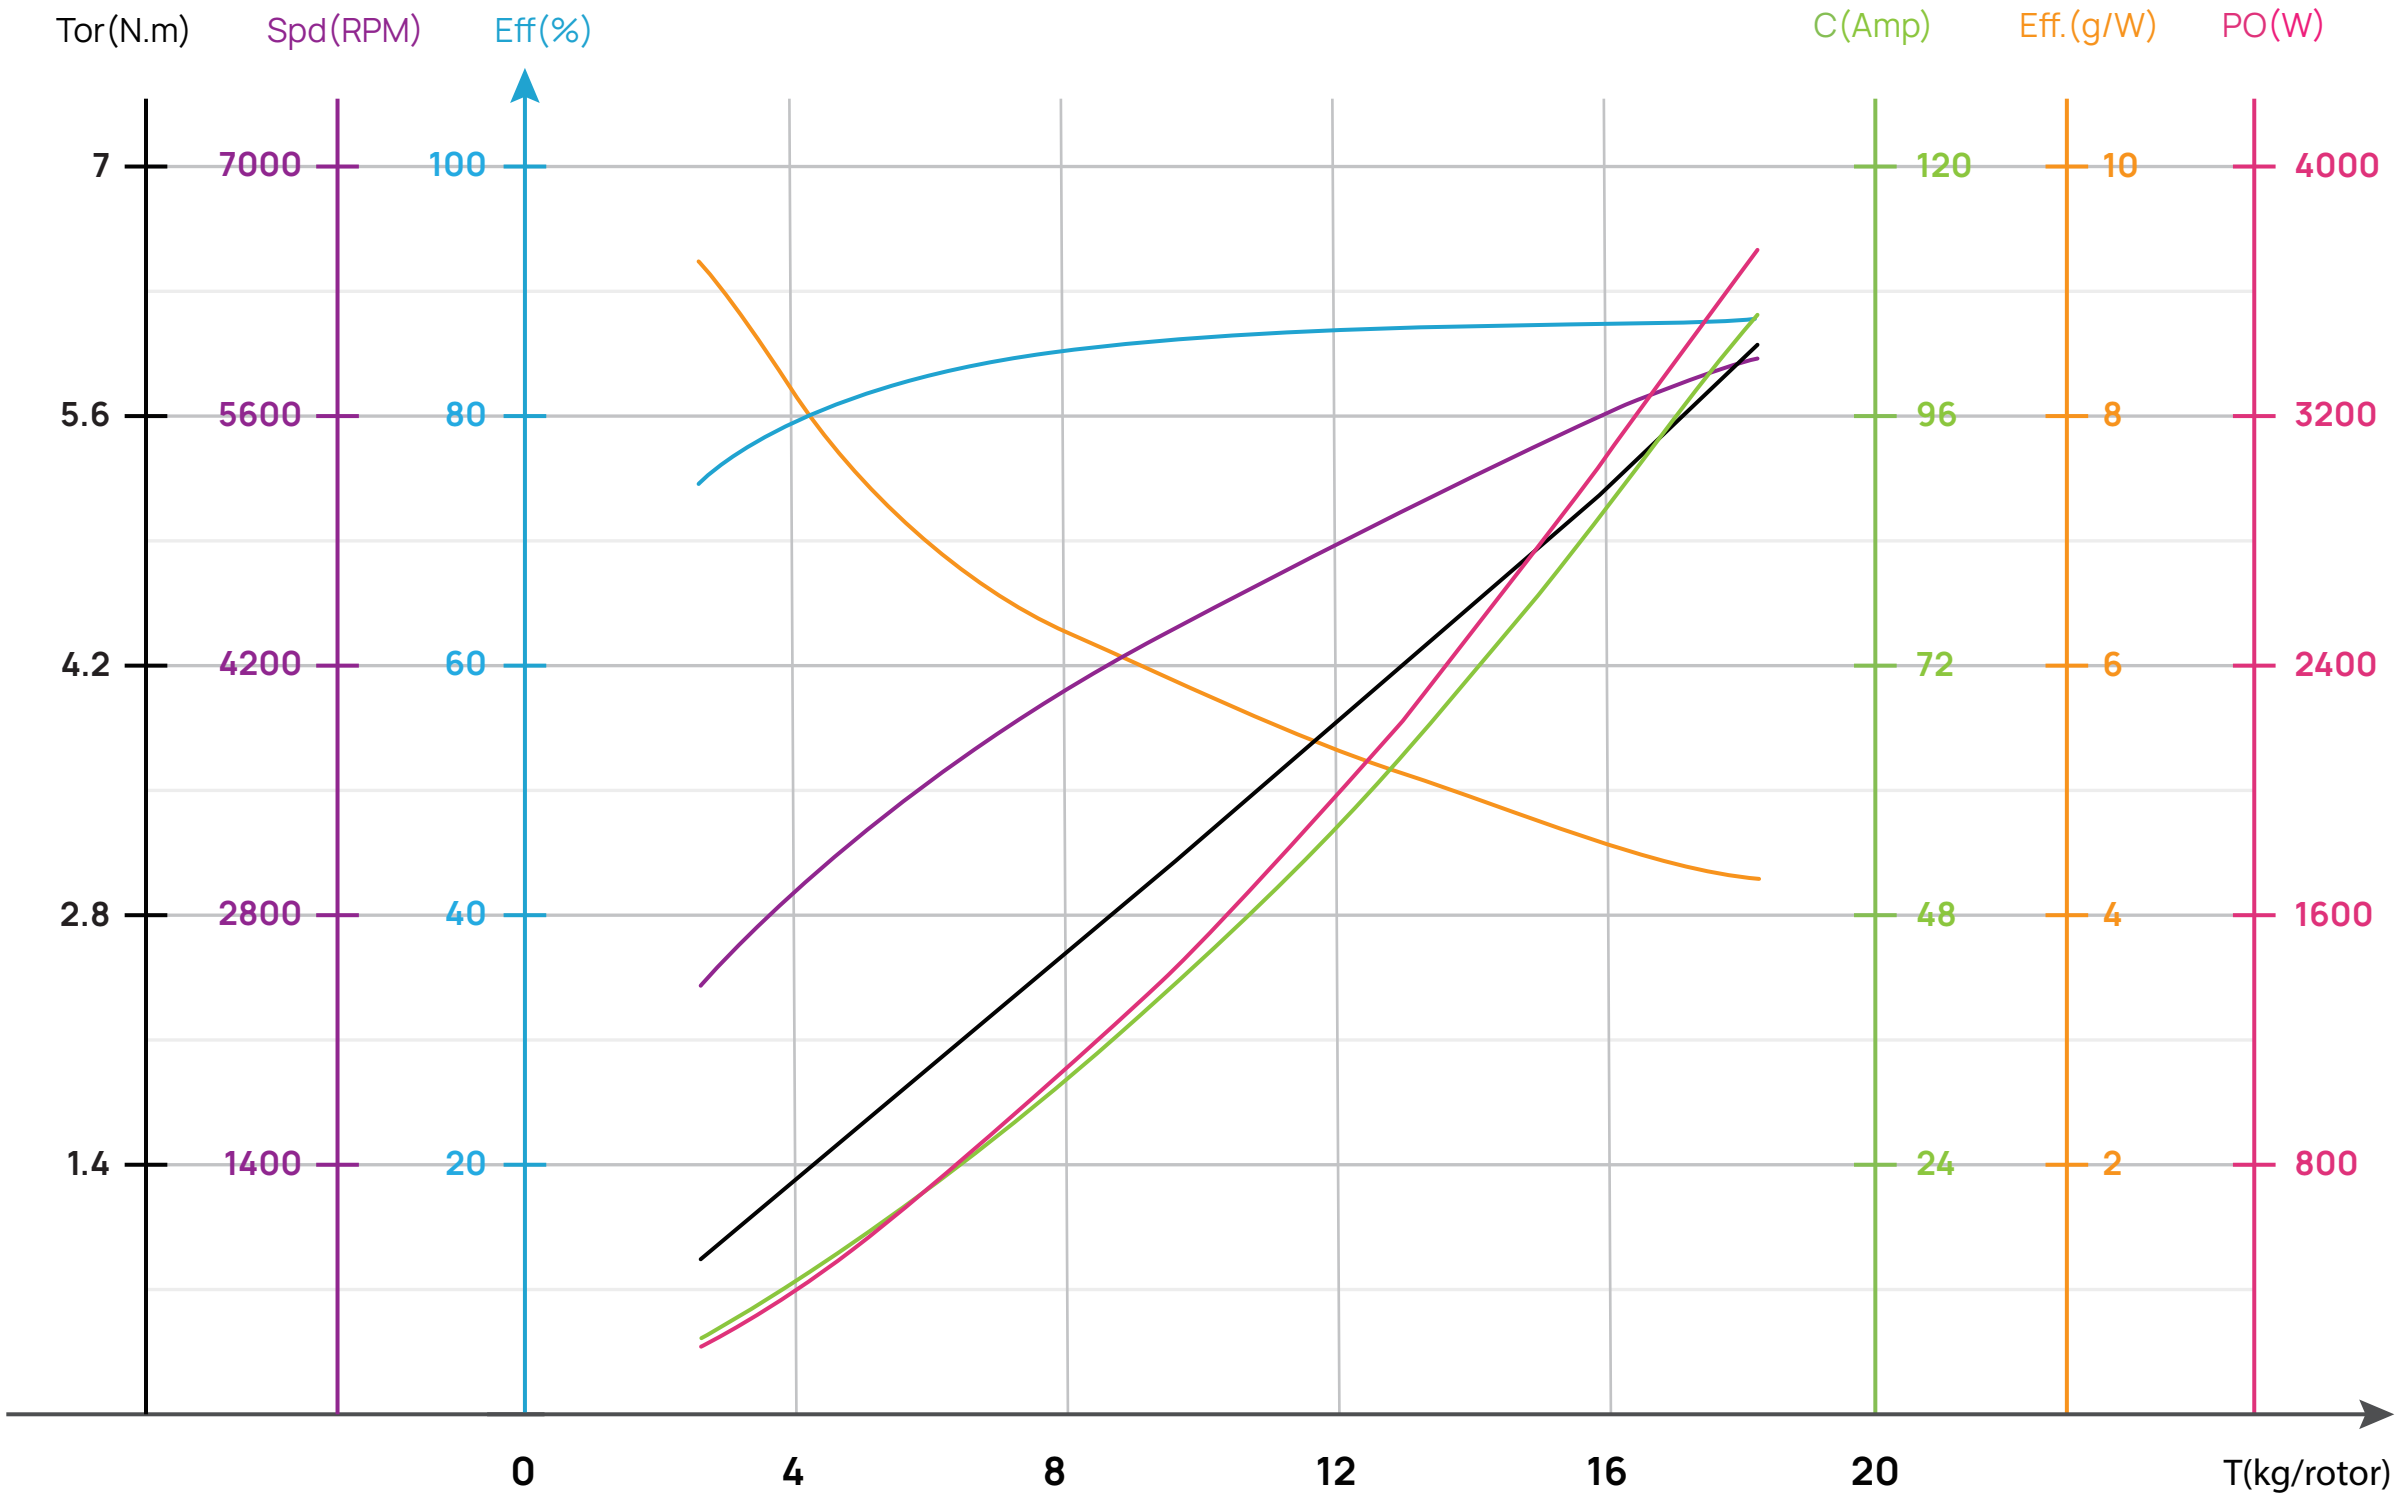


Voltage 工作电压 (V)	Propeller 螺旋桨	Throttle 油门 (%)	Thrust 拉力 (g)	Current 电流 (A)	Power Input 输入功率 (W)	Speed 转速 (RPM)	Efficiency 力效 (g/W)	Torque 扭矩 (N · m)	Power Output 输出功率 (W)	Temperature 电机温度 (℃)
40V (12S LiPo)	26×12	35%	2878	7.7	310.1	2440	9.3	0.91	232.5	/
		37%	3200	8.8	353.3	2568	9.1	1.01	271.6	
		39%	3561	10.1	406.2	2707	8.8	1.12	317.5	
		42%	4148	12.5	500.3	2921	8.3	1.31	400.7	
		45%	4766	15.2	608.1	3132	7.8	1.50	491.9	
		48%	5394	18.1	724.3	3332	7.4	1.71	596.6	
		51%	6026	21.1	846.9	3520	7.1	1.91	704.0	
		54%	6661	24.3	973.9	3696	6.8	2.11	816.6	
		57%	7305	27.6	1106.1	3863	6.6	2.32	938.4	
		60%	7968	31.1	1246.3	4025	6.4	2.53	1066.3	
		63%	8663	34.9	1397.3	4184	6.2	2.74	1200.4	
		66%	9403	39.0	1563.5	4346	6.0	2.98	1356.1	
		69%	10198	43.7	1749.8	4511	5.8	3.23	1525.7	
		72%	11057	49.0	1961.3	4682	5.6	3.50	1715.9	
		75%	11981	55.0	2202.9	4861	5.4	3.80	1934.2	
		78%	12963	61.9	2478.1	5048	5.2	4.12	2177.8	
		81%	13988	69.6	2785.5	5240	5.0	4.46	2447.2	
		84%	15029	77.9	3117.9	5431	4.8	4.82	2741.1	
		87%	16045	86.3	3456.7	5609	4.6	5.17	3036.5	
		90%	16980	94.2	3773.5	5760	4.5	5.50	3317.3	
		100%	18457	106.3	4256.1	5956	4.3	6.02	3754.5	

C8025-160KV & 26×12

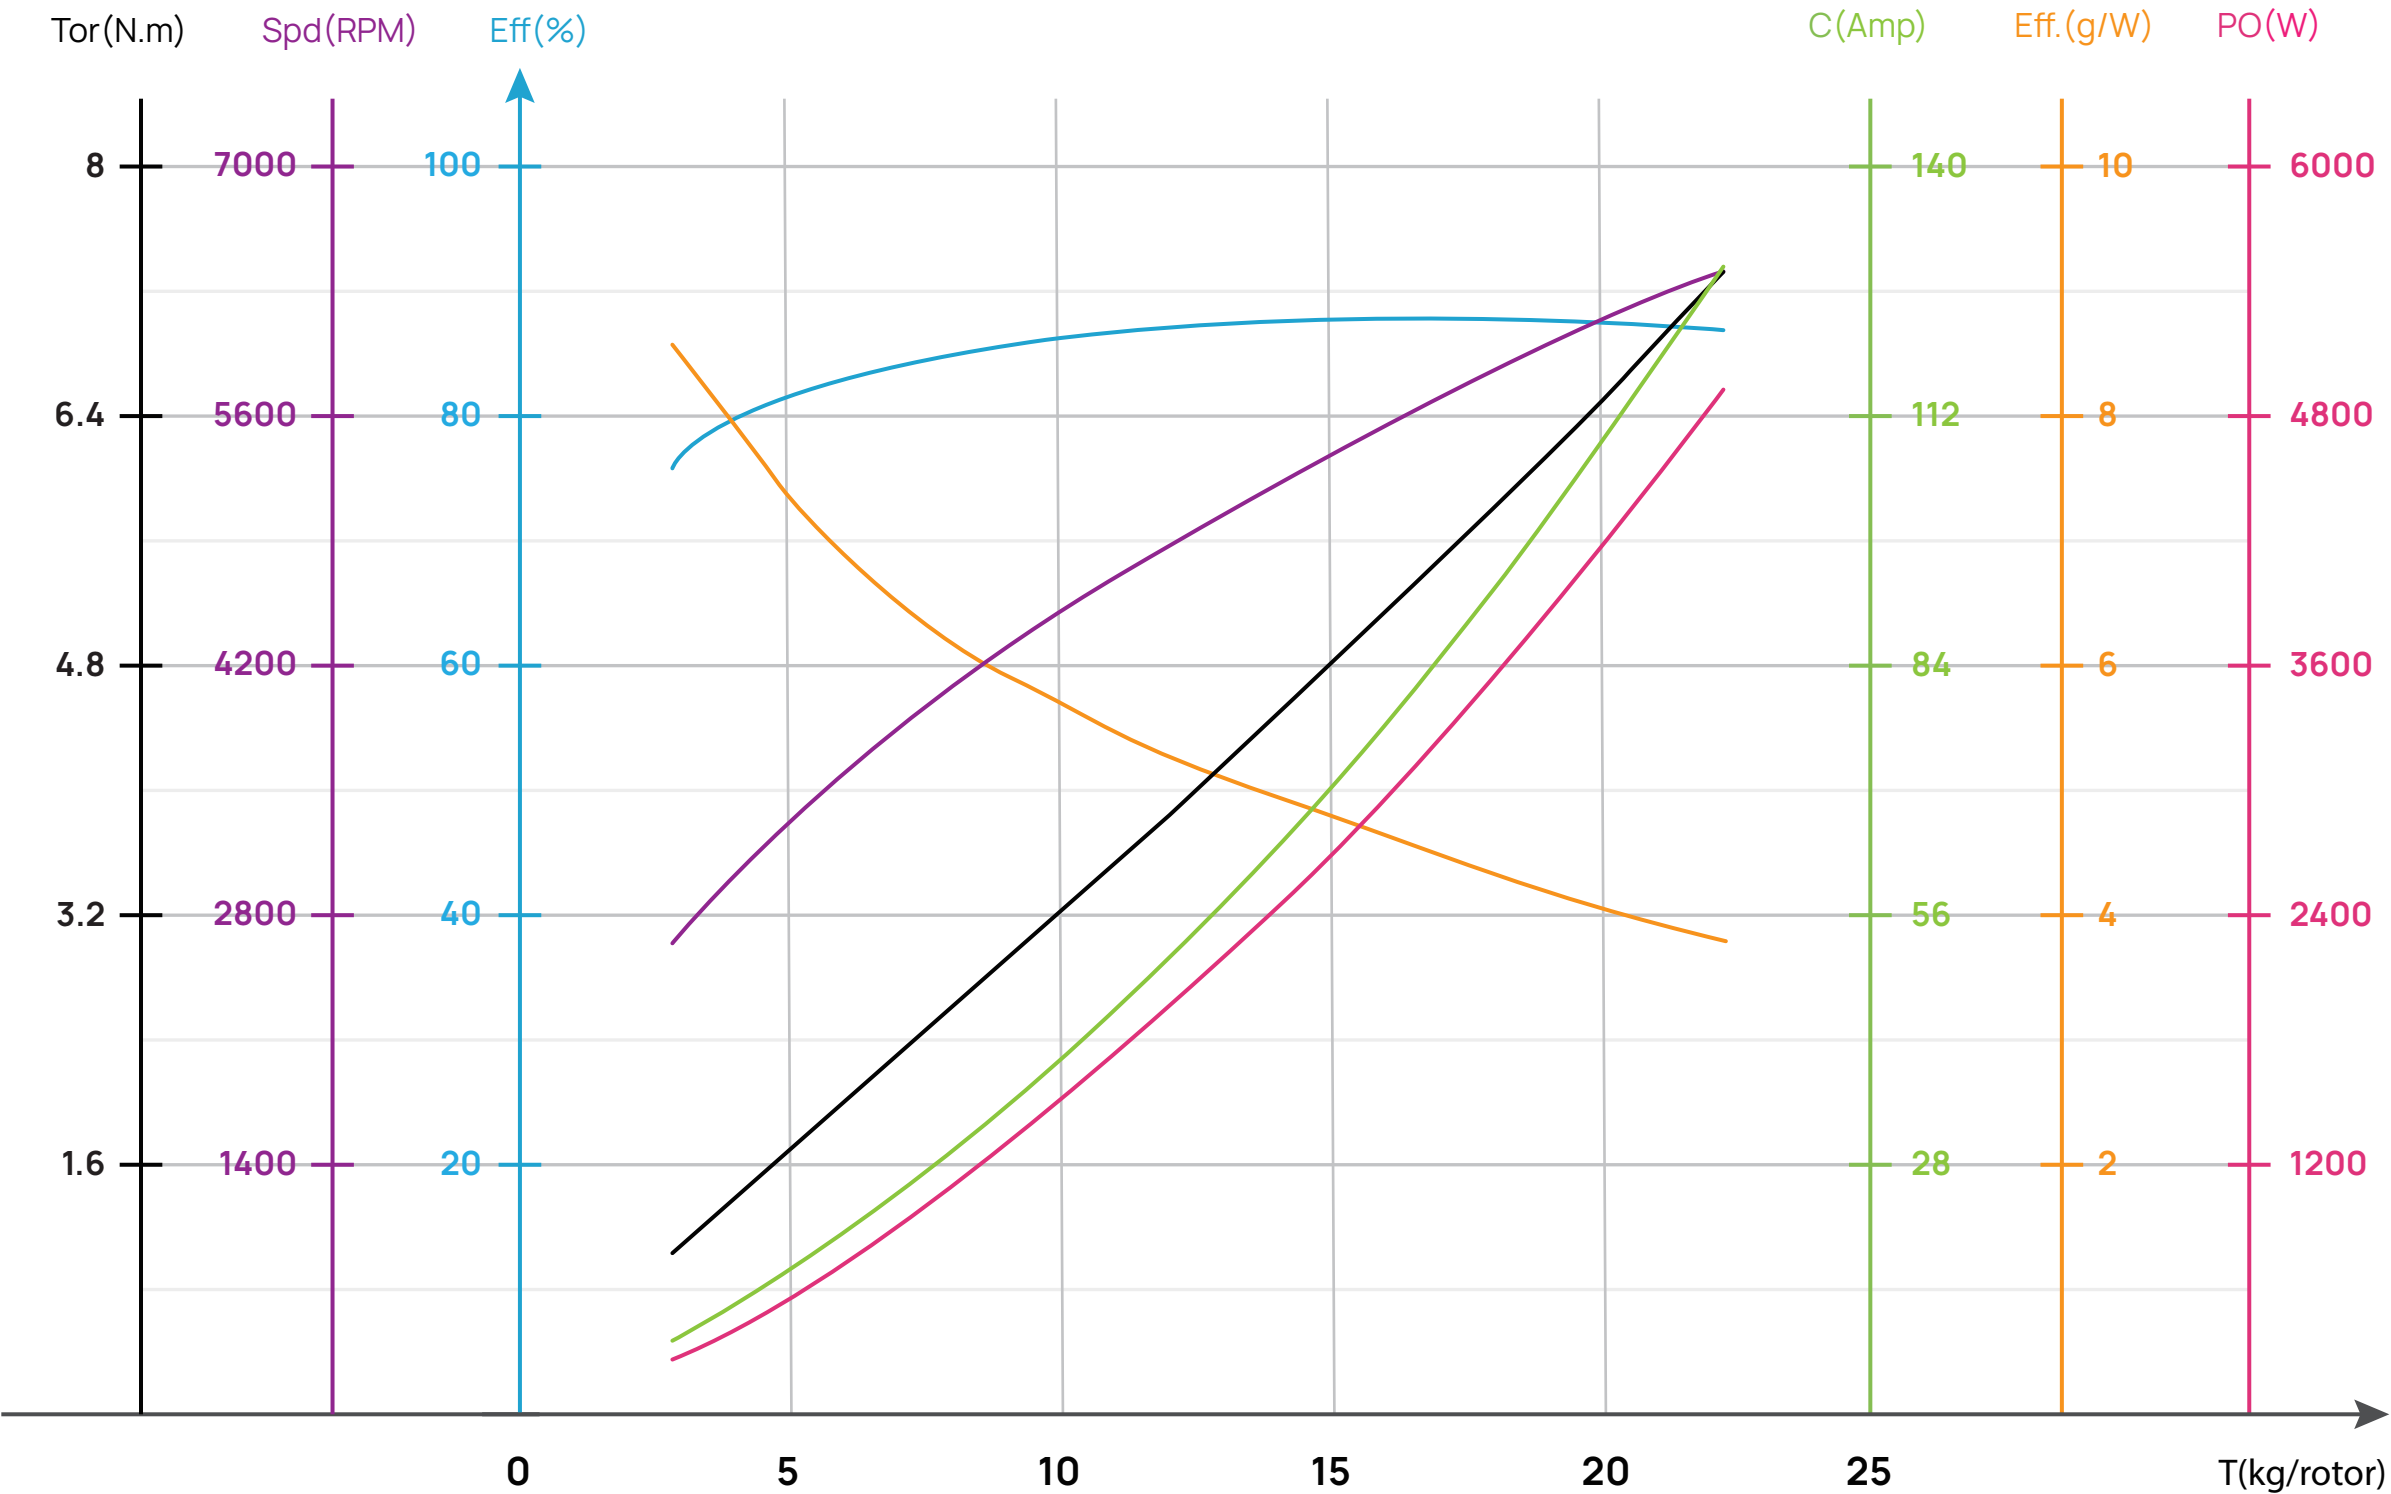


Voltage 工作电压 (V)	Propeller 螺旋桨	Throttle 油门(%)	Thrust 拉力 (g)	Current 电流 (A)	Power Input 输入功率 (W)	Speed 转速 (RPM)	Efficiency 力效 (g/W)	Torque 扭矩 (N · m)	Power Output 输出功率 (W)	Temperature 电机温度 (℃)
44V (12S LiPo)	26×12	35%	3449	9.1	401.5	2673	8.6	1.09	305.1	/
		37%	3846	10.4	459.2	2813	8.4	1.22	359.4	
		39%	4277	12.0	527.1	2960	8.1	1.35	418.4	
		42%	4965	14.6	644.7	3182	7.7	1.57	523.1	
		45%	5682	17.7	778.3	3400	7.3	1.80	640.8	
		48%	6414	21.0	923.3	3609	6.9	2.03	767.1	
		51%	7156	24.5	1078.0	3808	6.6	2.27	905.1	
		54%	7909	28.2	1241.7	3998	6.4	2.51	1050.8	
		57%	8679	32.1	1415.4	4180	6.1	2.75	1203.7	
		60%	9478	36.3	1601.9	4359	5.9	3.01	1373.9	
		63%	10315	40.9	1804.6	4537	5.7	3.28	1558.3	
		66%	11203	46.0	2027.7	4716	5.5	3.57	1762.9	
		69%	12151	51.6	2276.3	4898	5.3	3.87	1984.8	
		72%	13165	58.0	2555.8	5084	5.2	4.21	2241.2	
		75%	14244	65.1	2870.9	5275	5.0	4.56	2518.7	
		78%	15380	73.2	3224.9	5469	4.8	4.95	2834.7	
		81%	16557	82.1	3616.8	5665	4.6	5.36	3179.5	
		84%	17748	91.6	4039.5	5855	4.4	5.78	3543.7	
		87%	18912	101.6	4477.6	6033	4.2	6.20	3916.7	
		90%	19993	111.2	4902.6	6189	4.1	6.61	4283.7	
		100%	21953	129.2	5696.0	6433	3.9	7.35	4951.1	

C8025-160KV & 26×12

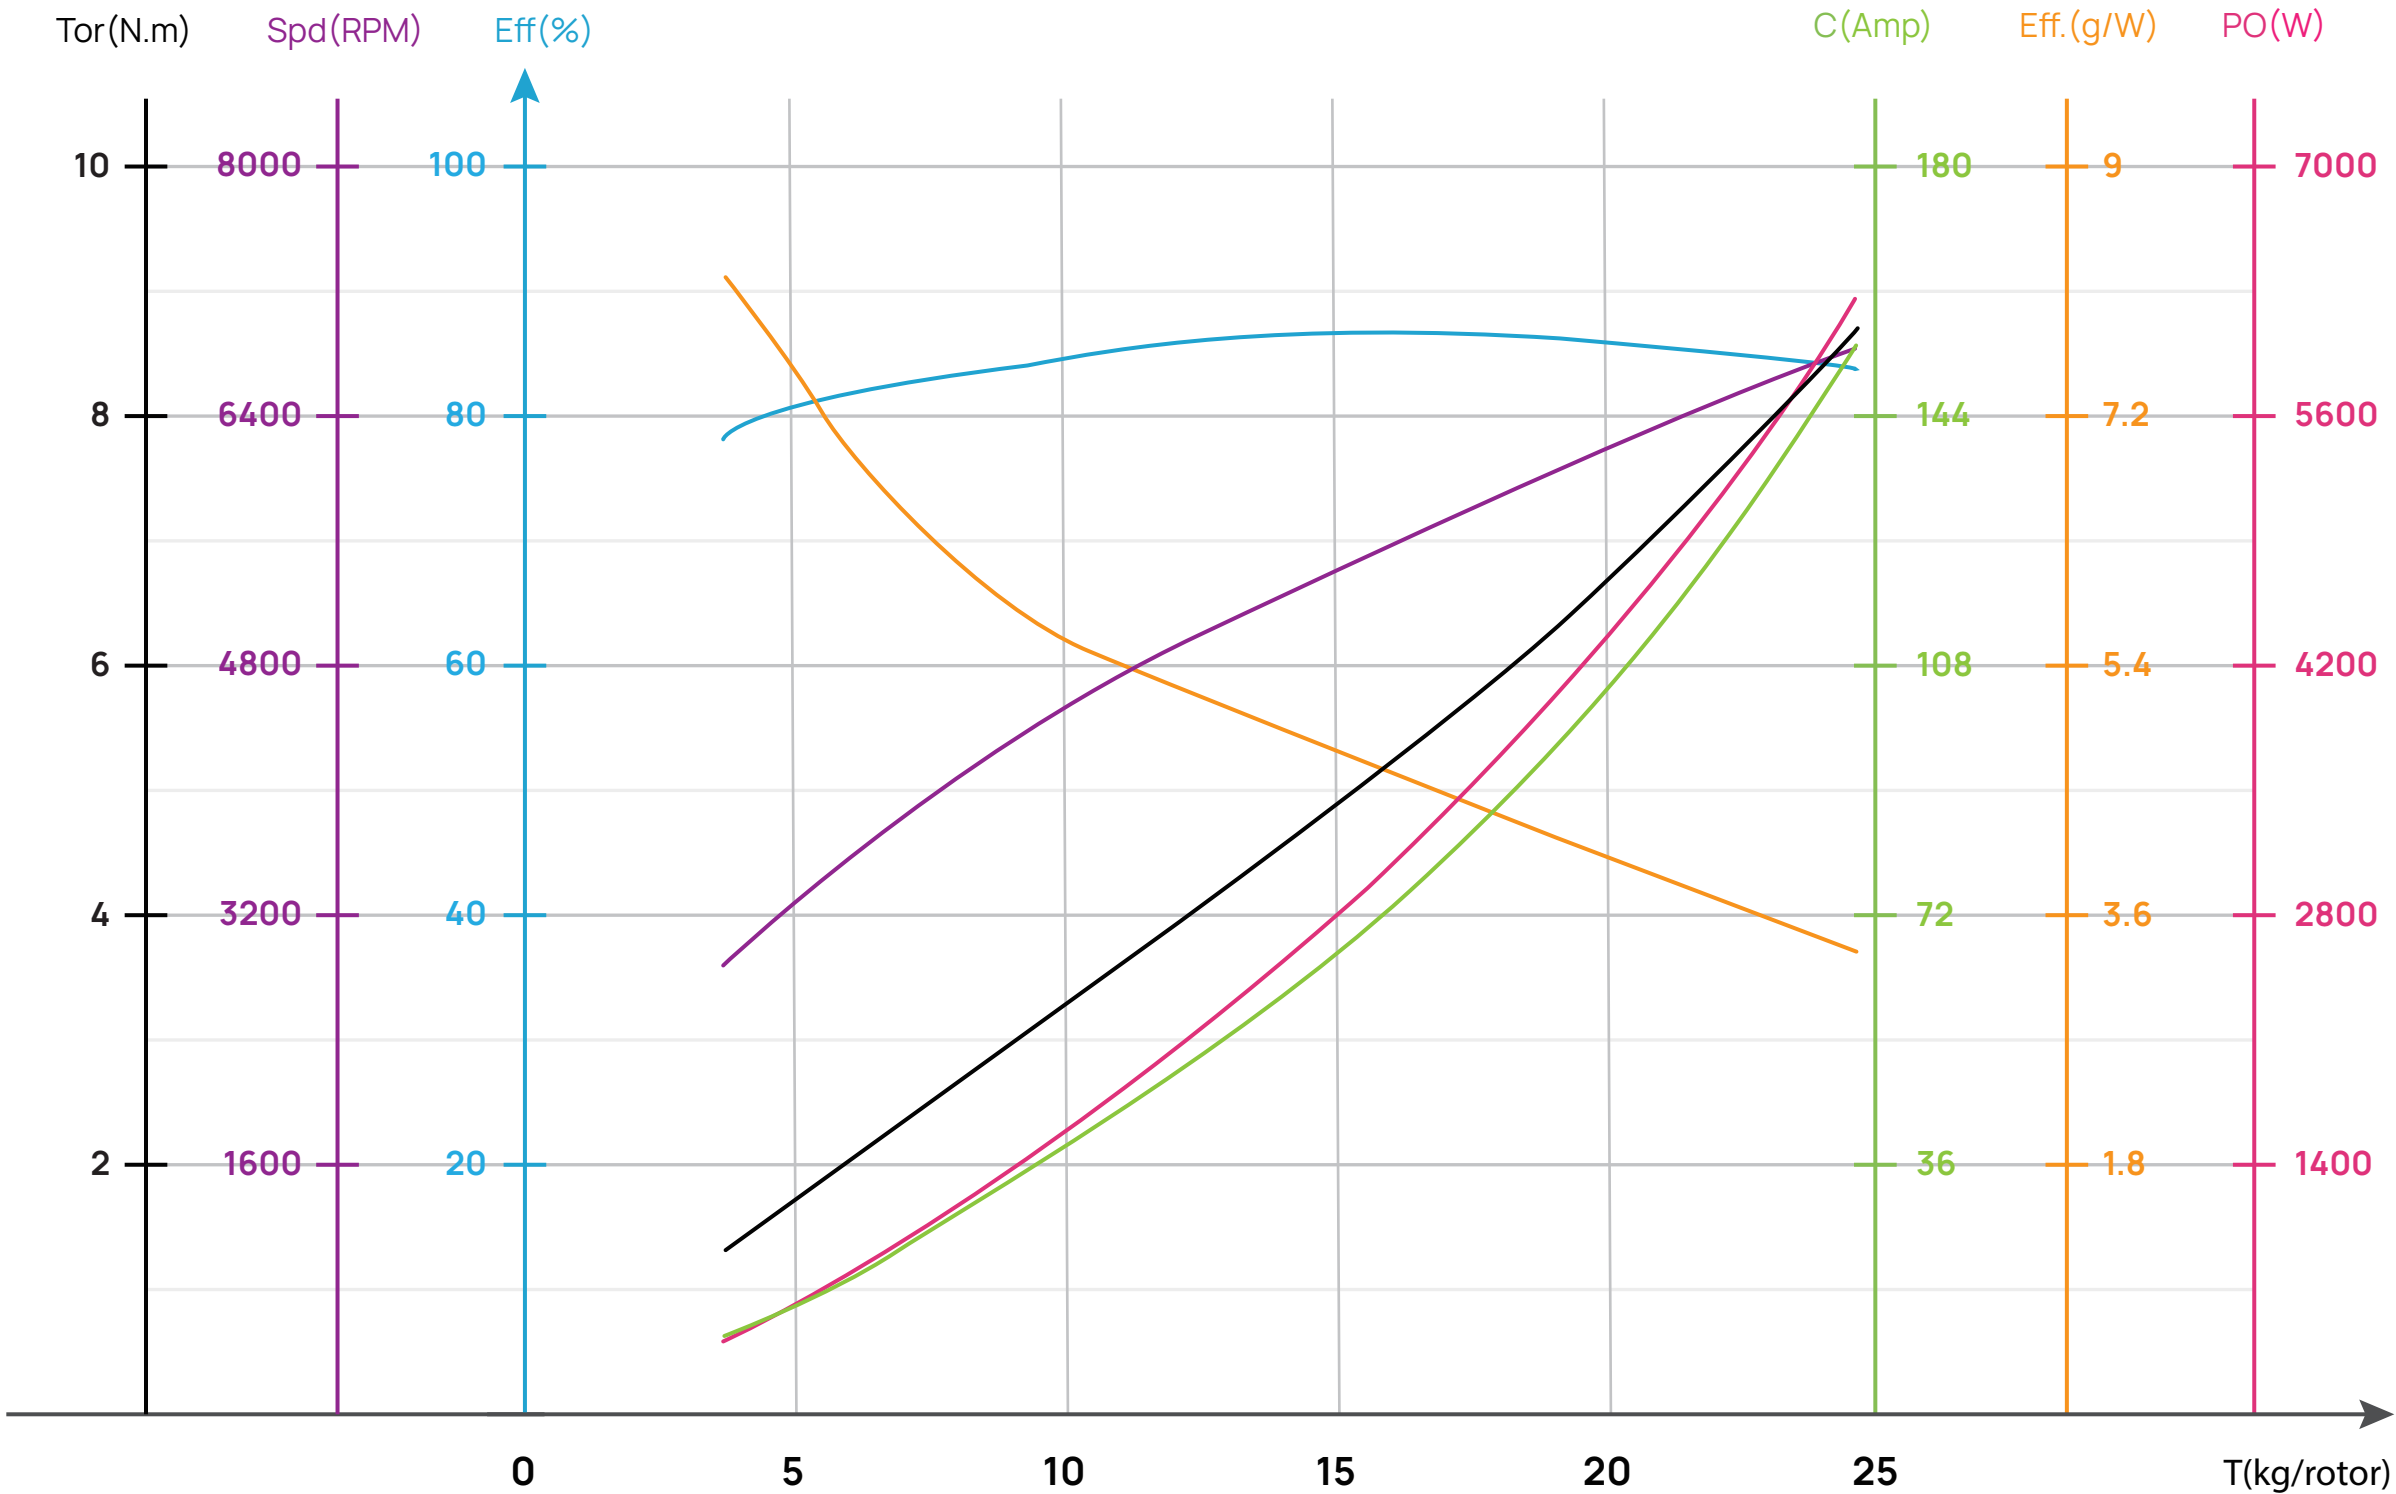


Voltage 工作电压 (V)	Propeller 螺旋桨	Throttle 油门 (%)	Thrust 拉力 (g)	Current 电流 (A)	Power Input 输入功率 (W)	Speed 转速 (RPM)	Efficiency 力效 (g/W)	Torque 扭矩 (N · m)	Power Output 输出功率 (W)	Temperature 电机温度 (°C)
48V (12S LiPo)	26×12	35%	4073	10.3	493.7	2895	8.3	1.28	388.0	100°C
		37%	4531	11.7	563.9	3044	8.0	1.42	452.6	
		39%	5020	13.5	647.5	3198	7.8	1.57	525.7	
		42%	5794	16.5	793.6	3431	7.3	1.81	650.3	
		45%	6602	20.0	960.9	3659	6.9	2.08	796.9	
		48%	7434	23.8	1144.5	3880	6.5	2.35	954.8	
		51%	8288	27.9	1342.1	4093	6.2	2.63	1127.2	
		54%	9167	32.3	1552.7	4298	5.9	2.91	1309.7	
		57%	10077	37.0	1776.7	4498	5.7	3.21	1511.9	
		60%	11028	42.0	2017.0	4695	5.5	3.51	1725.6	
		63%	12030	47.4	2277.1	4890	5.3	3.83	1961.1	
		66%	13090	53.3	2562.6	5085	5.1	4.17	2220.4	
		69%	14213	59.9	2880.4	5282	4.9	4.54	2511.0	
		72%	15402	67.4	3238.0	5480	4.8	4.93	2828.9	
		75%	16650	75.8	3644.7	5681	4.6	5.35	3182.5	
		78%	17944	85.5	4108.1	5883	4.4	5.82	3585.2	
		81%	19262	96.3	4630.6	6084	4.2	6.32	4026.3	
		84%	20571	108.3	5206.0	6280	4.0	6.85	4504.5	
		87%	21822	120.9	5812.1	6464	3.8	7.38	4995.2	
		90%	22957	133.3	6408.7	6626	3.6	7.89	5474.3	
		100%	24794	155.2	7459.0	6875	3.3	8.75	6299.1	

C8025-190KV & 23×10

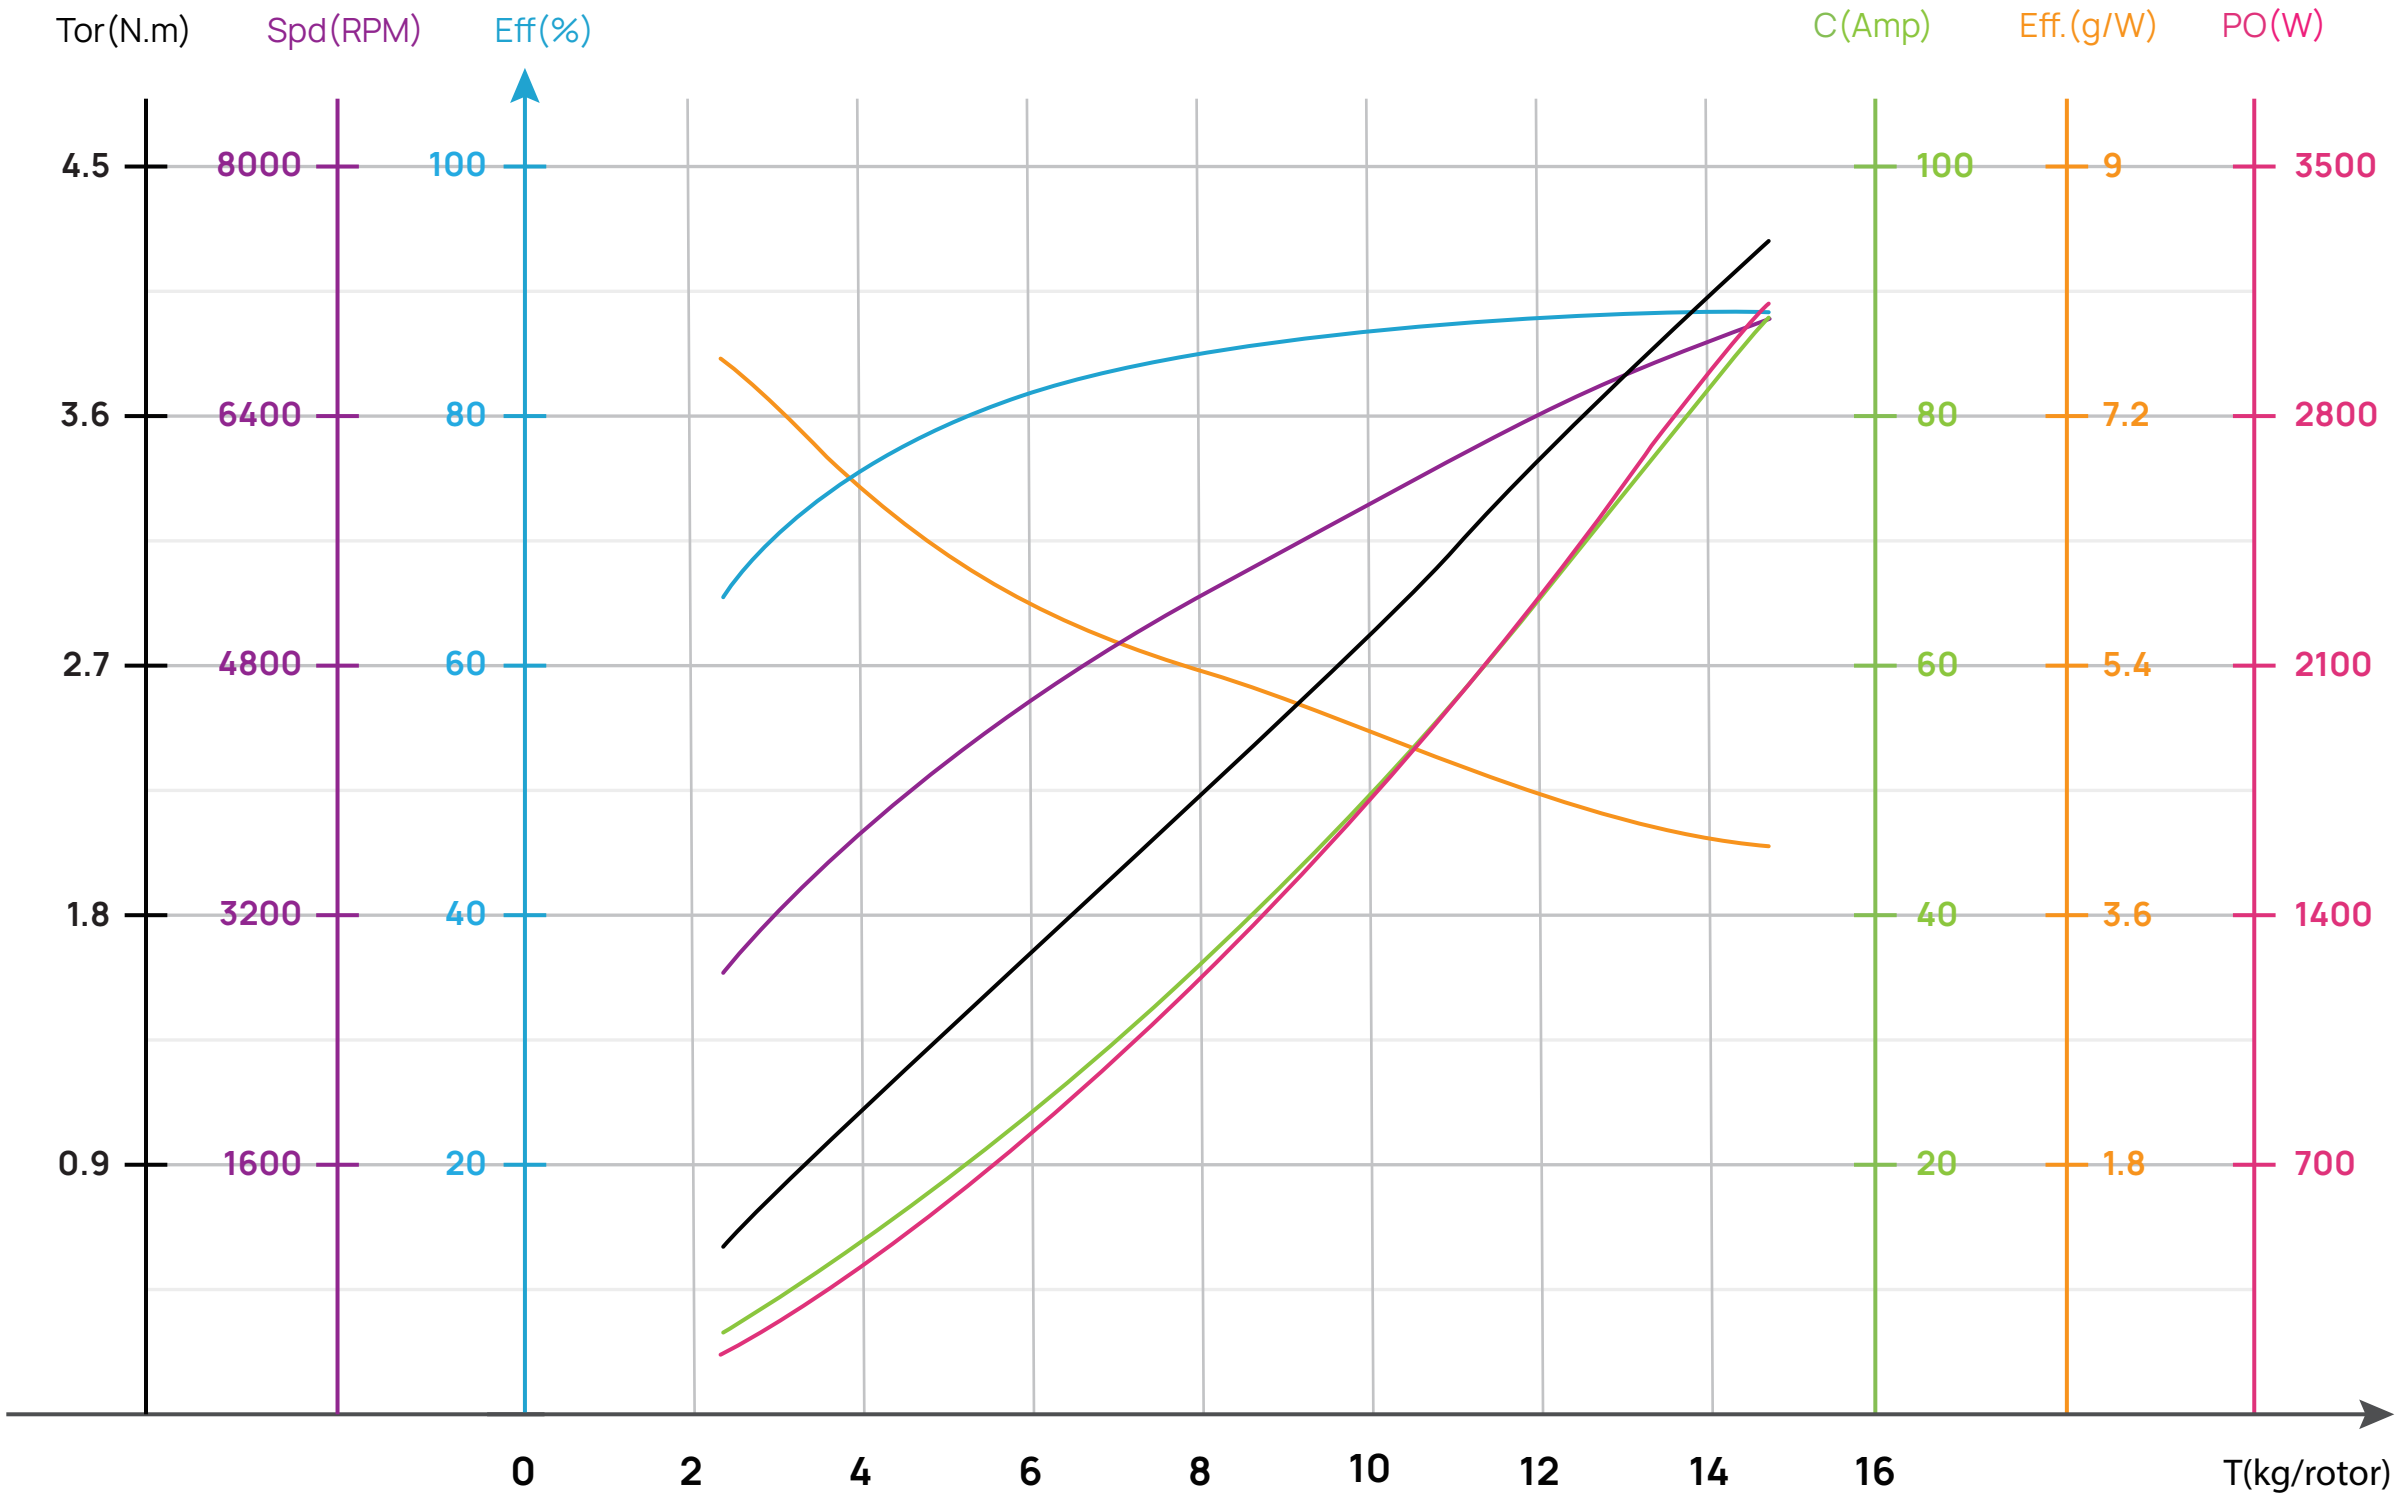


Voltage 工作电压 (V)	Propeller 螺旋桨	Throttle 油门(%)	Thrust 拉力 (g)	Current 电流 (A)	Power Input 输入功率 (W)	Speed 转速 (RPM)	Efficiency 力效 (g/W)	Torque 扭矩 (N · m)	Power Output 输出功率 (W)	Temperature 电机温度 (°C)
40V (12S LiPo)	23×10	35%	2232	7.3	292.8	2868	7.6	0.64	192.2	/
		37%	2473	8.2	328.8	3014	7.5	0.71	224.1	
		39%	2735	9.3	370.5	3166	7.4	0.78	258.6	
		42%	3152	11.0	442.2	3397	7.1	0.90	320.1	
		45%	3590	13.1	522.7	3623	6.9	1.03	390.8	
		48%	4040	15.2	610.0	3841	6.6	1.16	466.6	
		51%	4502	17.6	703.3	4050	6.4	1.30	551.3	
		54%	4978	20.0	802.2	4252	6.2	1.44	641.1	
		57%	5473	22.7	907.9	4449	6.0	1.58	736.1	
		60%	5994	25.5	1022.5	4645	5.9	1.73	841.5	
		63%	6548	28.6	1147.0	4841	5.7	1.88	953.0	
		66%	7143	32.1	1285.2	5040	5.6	2.05	1081.9	
		69%	7785	36.0	1439.8	5245	5.4	2.23	1224.7	
		72%	8475	40.3	1614.8	5457	5.2	2.43	1388.5	
		75%	9212	45.3	1812.7	5676	5.1	2.64	1569.1	
		78%	9991	50.8	2036.1	5901	4.9	2.87	1773.4	
		81%	10800	57.0	2283.7	6129	4.7	3.11	1995.9	
		84%	11618	63.7	2549.2	6353	4.6	3.37	2241.8	
		87%	12419	70.4	2819.9	6563	4.4	3.62	2487.8	
		90%	13164	76.8	3075.0	6746	4.3	3.85	2719.6	
		100%	14556	88.0	3524.4	7031	4.1	4.23	3114.3	

C8025-190KV & 23×10

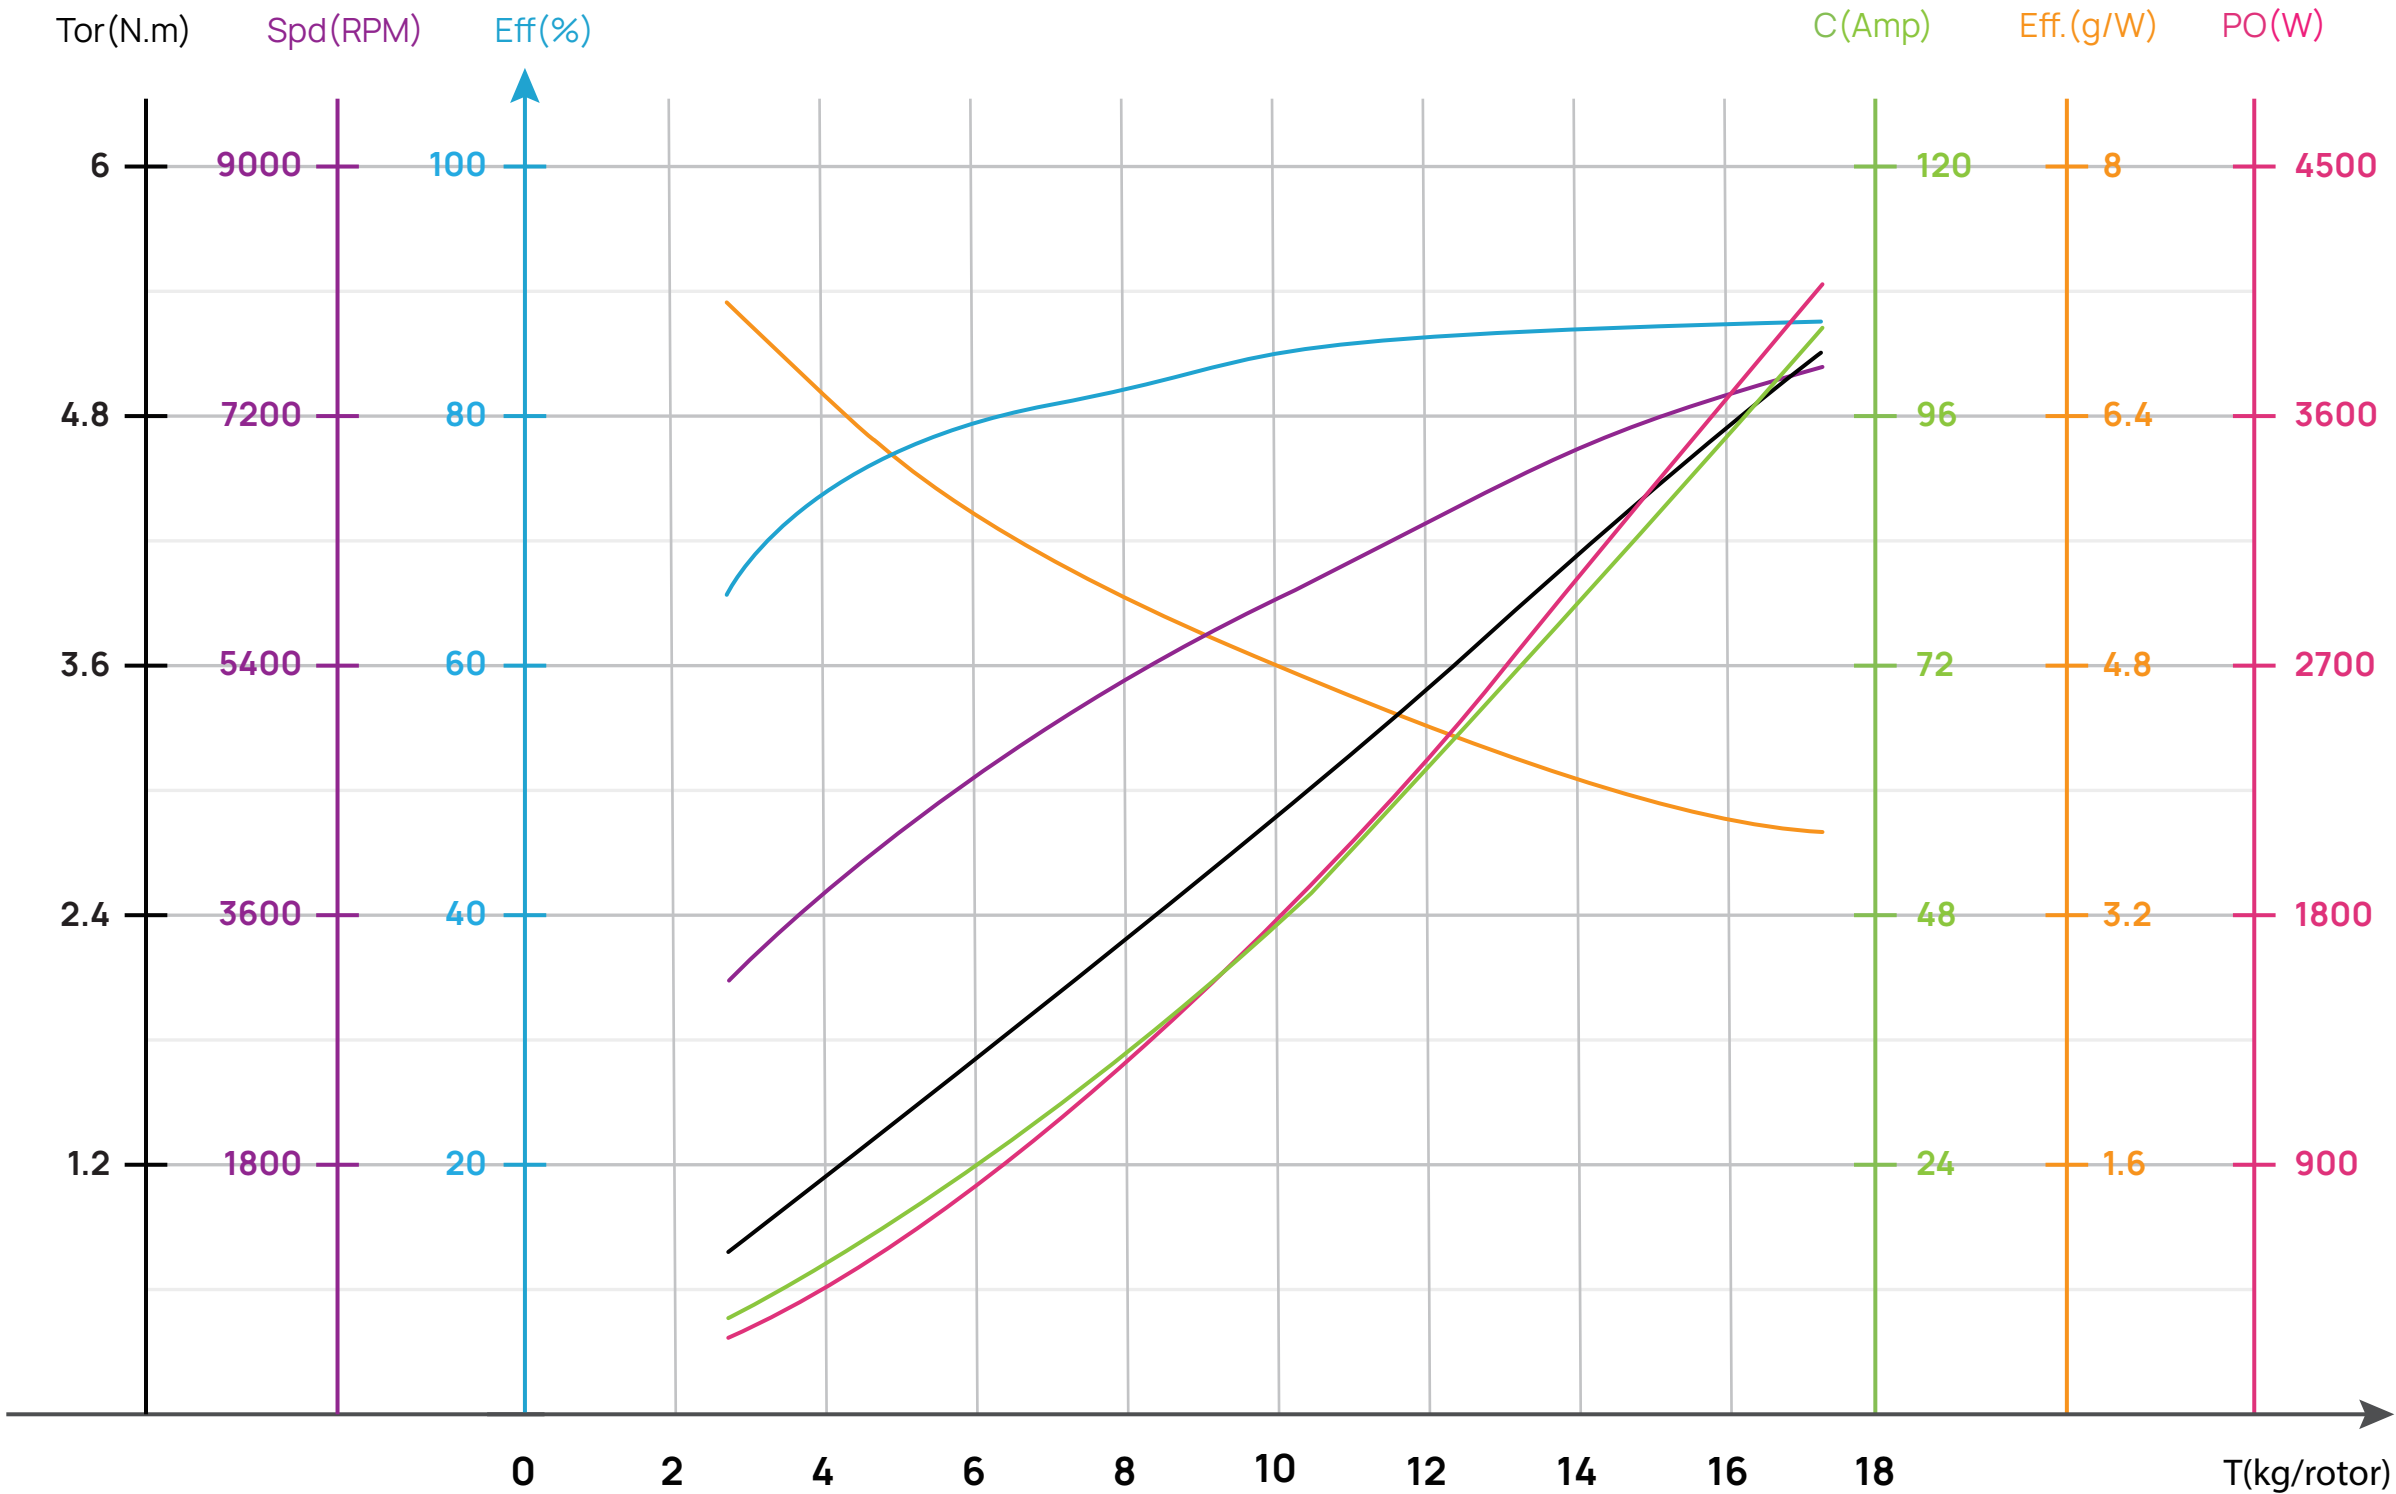


Voltage 工作电压 (V)	Propeller 螺旋桨	Throttle 油门 (%)	Thrust 拉力 (g)	Current 电流 (A)	Power Input 输入功率 (W)	Speed 转速 (RPM)	Efficiency 力效 (g/W)	Torque 扭矩 (N · m)	Power Output 输出功率 (W)	Temperature 电机温度 (℃)
44V (12S LiPo)	23×10	35%	2595	8.2	360.9	3085	7.2	0.74	239.0	/
		37%	2872	9.2	406.3	3246	7.1	0.82	278.7	
		39%	3184	10.4	460.1	3418	6.9	0.91	325.7	
		42%	3699	12.6	554.4	3681	6.7	1.06	408.6	
		45%	4246	15.0	661.1	3937	6.4	1.22	502.9	
		48%	4810	17.6	776.5	4179	6.2	1.37	599.5	
		51%	5382	20.4	899.5	4407	6.0	1.54	710.7	
		54%	5961	23.3	1028.6	4623	5.8	1.70	822.9	
		57%	6552	26.4	1165.2	4832	5.6	1.87	946.2	
		60%	7162	29.8	1311.5	5038	5.5	2.04	1076.2	
		63%	7801	33.4	1471.1	5245	5.3	2.23	1224.7	
		66%	8480	37.4	1647.3	5458	5.1	2.42	1383.1	
		69%	9207	41.9	1846.1	5680	5.0	2.64	1570.2	
		72%	9989	47.0	2071.3	5913	4.8	2.88	1783.2	
		75%	10829	52.8	2327.8	6157	4.7	3.13	2017.9	
		78%	11723	59.4	2618.2	6407	4.5	3.41	2287.7	
		81%	12661	66.7	2941.2	6659	4.3	3.70	2579.9	
		84%	13624	74.7	3290.3	6901	4.1	4.01	2897.7	
		87%	14582	82.8	3649.4	7122	4.0	4.31	3214.2	
		90%	15492	90.6	3993.2	7312	3.9	4.60	3522.0	
		100%	17360	105.6	4653.8	7630	3.7	5.15	4114.6	

C8025-190KV & 23×10

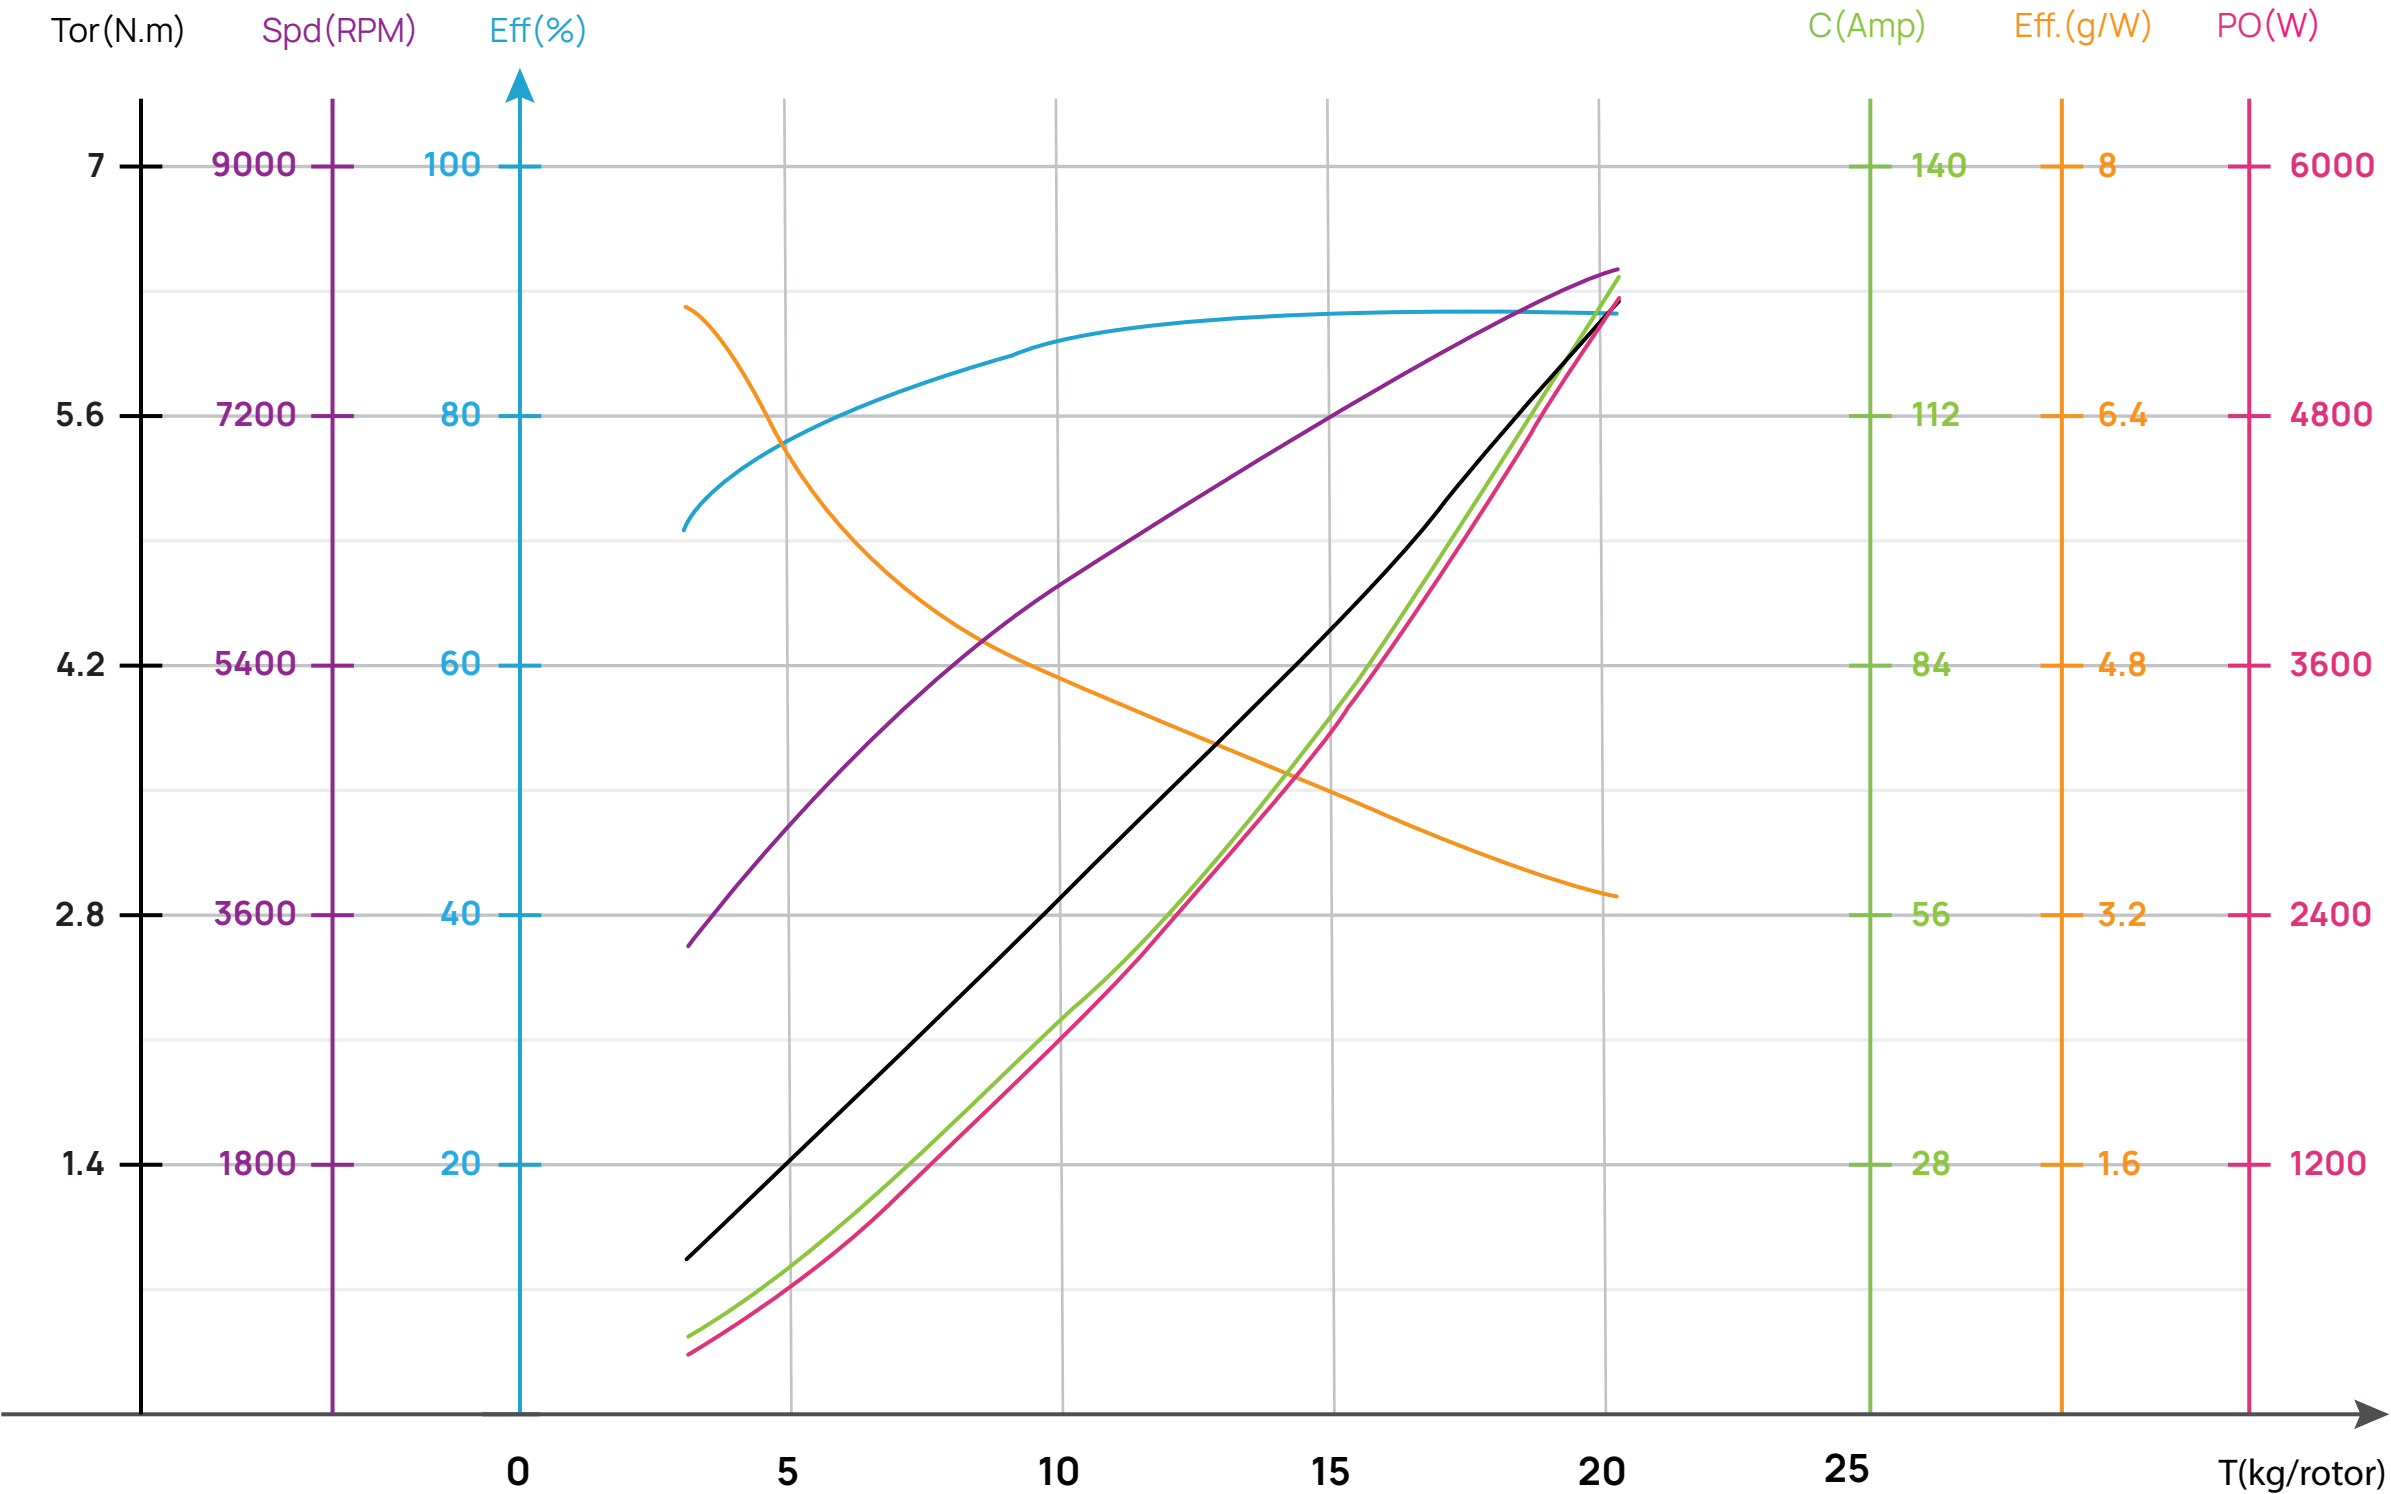


Voltage 工作电压 (V)	Propeller 螺旋桨	Throttle 油门 (%)	Thrust 拉力 (g)	Current 电流 (A)	Power Input 输入功率 (W)	Speed 转速 (RPM)	Efficiency 力效 (g/W)	Torque 扭矩 (N · m)	Power Output 输出功率 (W)	Temperature 电机温度 (℃)
48V (12S LiPo)	23×10	35%	3140	9.3	446.0	3365	7.0	0.89	313.6	70℃
		37%	3476	10.4	499.8	3532	7.0	0.98	362.4	
		39%	3831	11.7	564.2	3705	6.8	1.08	419.0	
		42%	4386	14.1	677.2	3968	6.5	1.24	515.2	
		45%	4961	16.8	806.4	4227	6.2	1.41	624.1	
		48%	5552	19.7	948.7	4480	5.9	1.59	745.9	
		51%	6161	22.9	1102.0	4727	5.6	1.77	876.1	
		54%	6794	26.4	1266.4	4967	5.4	1.96	1019.4	
		57%	7460	30.0	1442.3	5203	5.2	2.16	1176.8	
		60%	8170	34.0	1633.1	5438	5.0	2.38	1355.2	
		63%	8935	38.3	1840.7	5672	4.9	2.60	1544.2	
		66%	9765	43.1	2069.5	5907	4.7	2.84	1756.6	
		69%	10665	48.4	2325.1	6144	4.6	3.10	1994.4	
		72%	11639	54.4	2614.0	6385	4.5	3.39	2266.5	
		75%	12682	61.3	2944.2	6632	4.3	3.69	2562.5	
		78%	13785	69.1	3322.9	6887	4.1	4.03	2906.2	
		81%	14929	78.1	3753.5	7149	4.0	4.39	3286.3	
		84%	16085	88.0	4229.8	7412	3.8	4.77	3702.1	
		87%	17212	98.4	4729.1	7664	3.6	5.16	4141.0	
		90%	18257	108.5	5212.6	7884	3.5	5.53	4565.3	
		100%	20173	126.6	6082.5	8202	3.3	6.20	5324.9	

C8025-190KV & 24×10

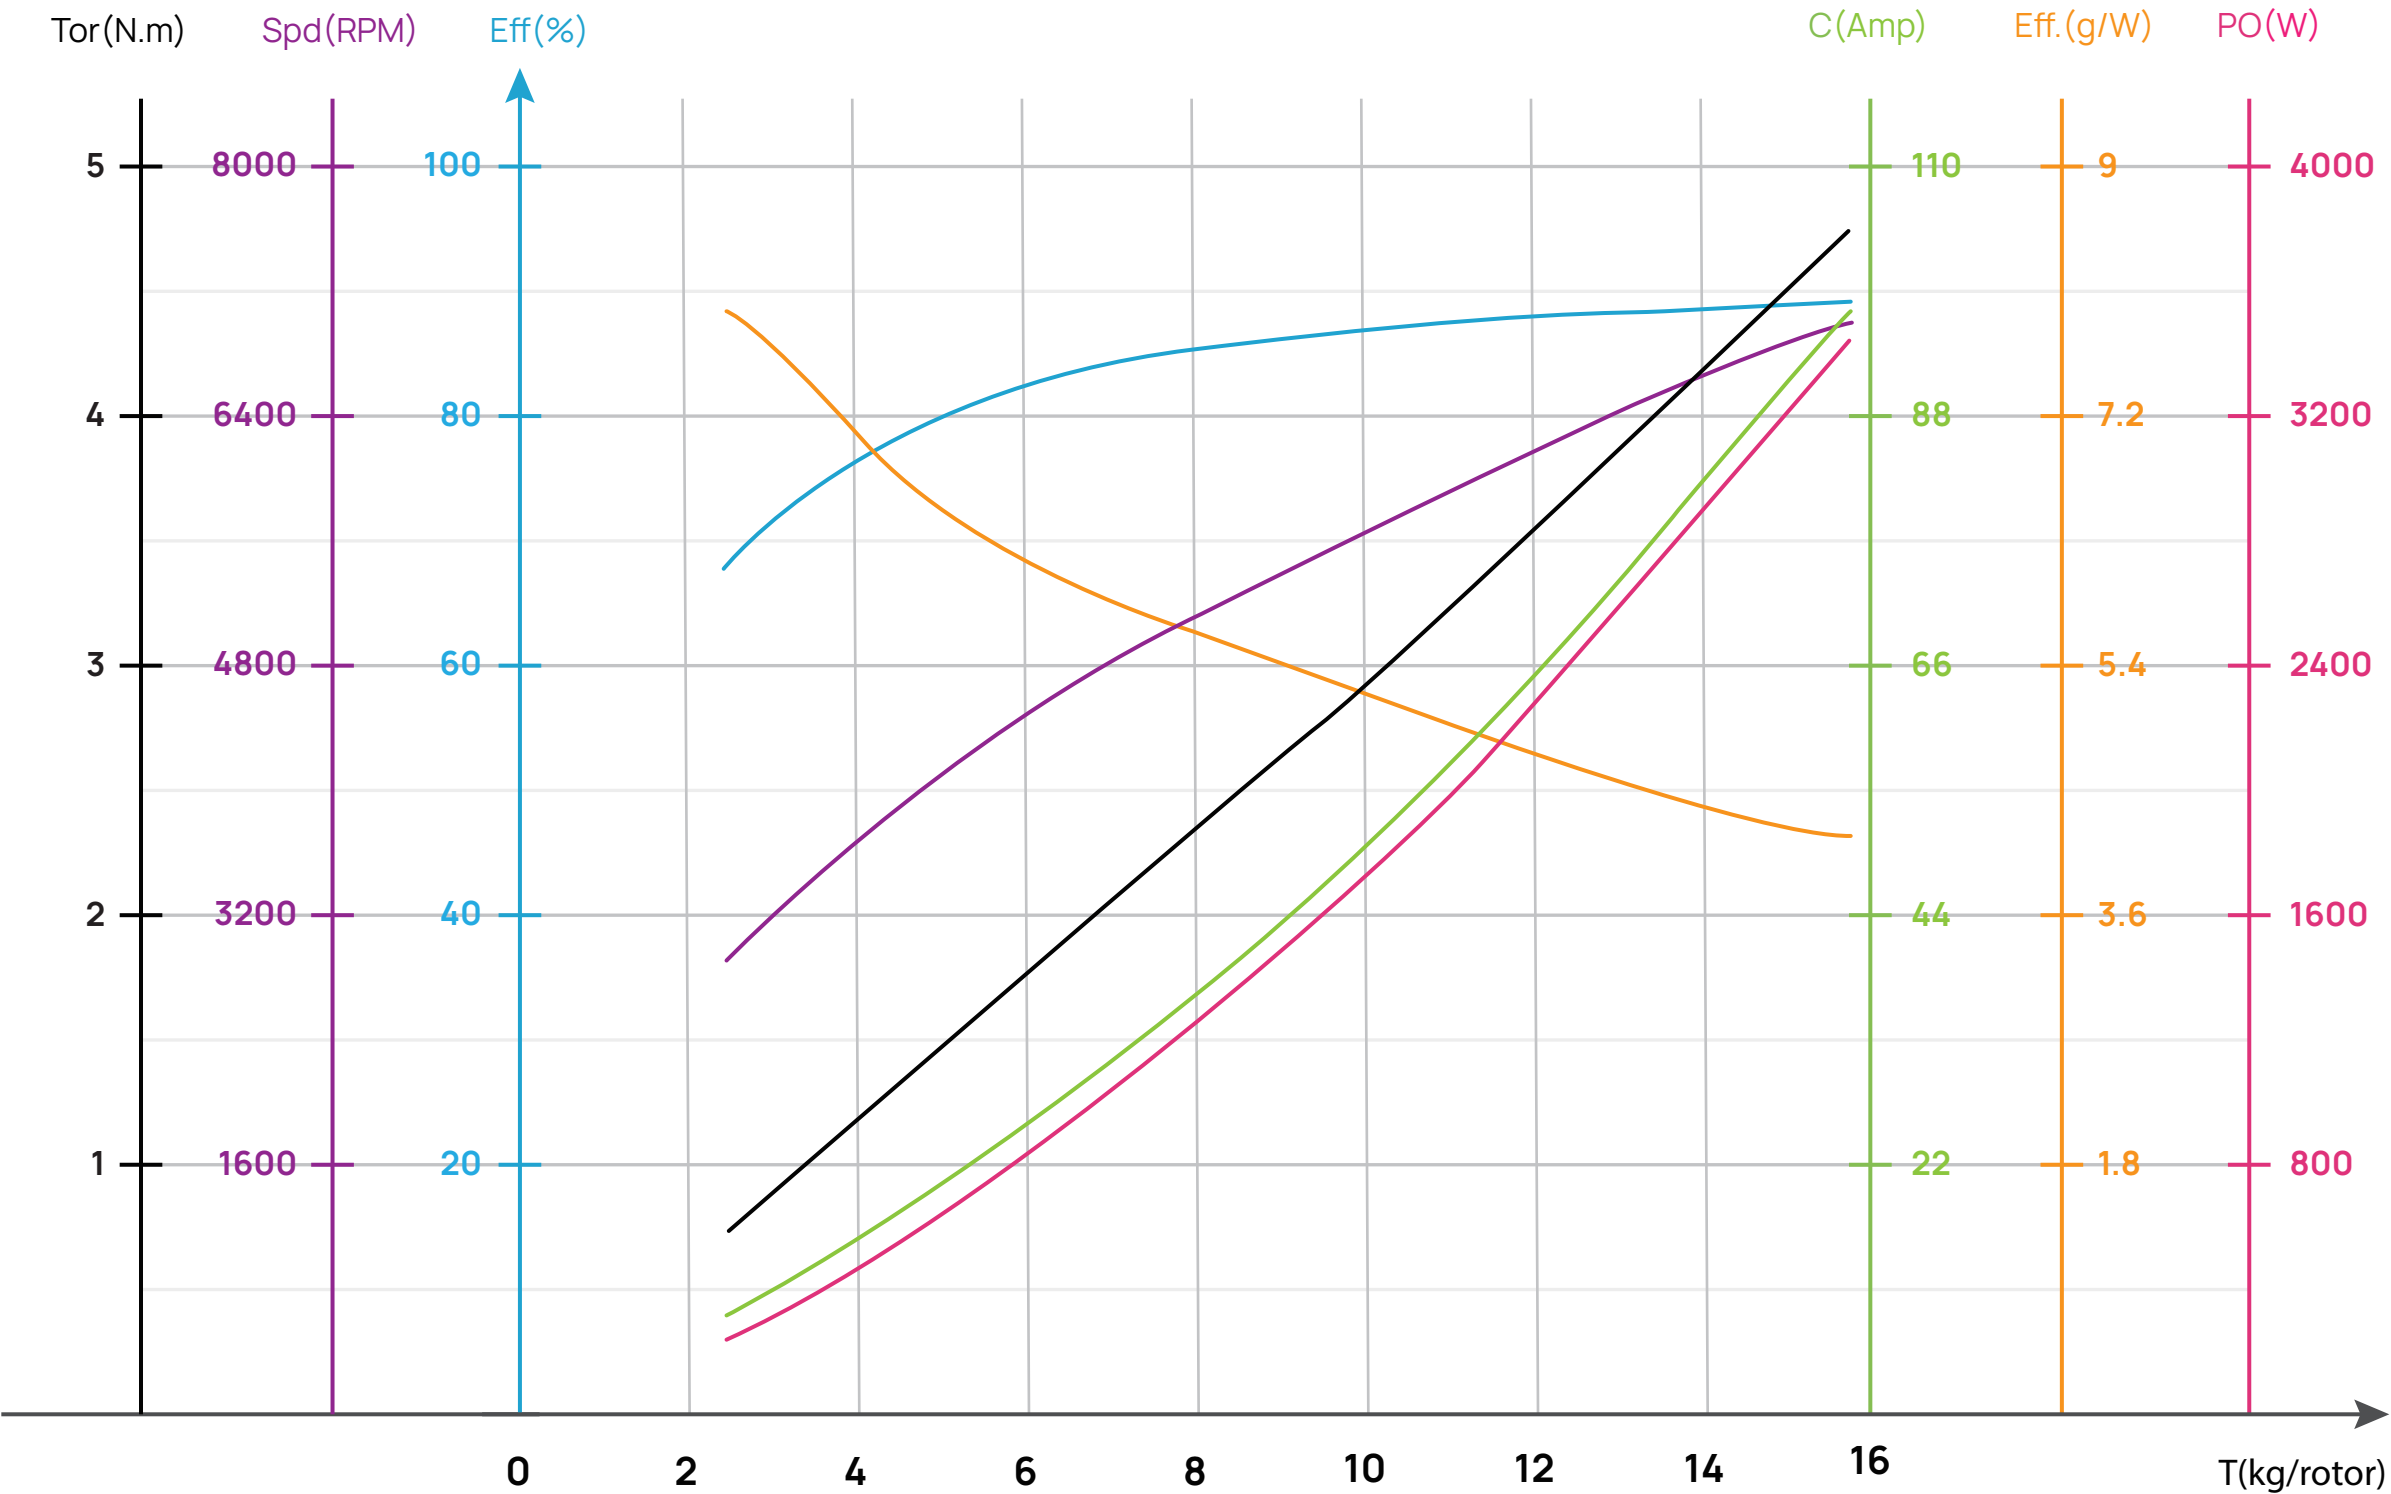


Voltage 工作电压 (V)	Propeller 螺旋桨	Throttle 油门 (%)	Thrust 拉力 (g)	Current 电流 (A)	Power Input 输入功率 (W)	Speed 转速 (RPM)	Efficiency 力效 (g/W)	Torque 扭矩 (N · m)	Power Output 输出功率 (W)	Temperature 电机温度 (℃)
40V (12S LiPo)	24×10	35%	2427	7.7	307.2	2843	7.9	0.69	205.4	/
		37%	2696	8.6	346.0	2988	7.8	0.77	240.9	
		39%	2987	9.8	391.3	3139	7.6	0.85	279.4	
		42%	3451	11.8	470.6	3370	7.3	0.98	345.8	
		45%	3934	14.0	559.5	3597	7.0	1.12	421.8	
		48%	4429	16.4	656.0	3816	6.7	1.27	507.5	
		51%	4935	19.0	758.9	4026	6.5	1.42	598.6	
		54%	5454	21.7	867.5	4227	6.3	1.57	694.9	
		57%	5993	24.5	982.8	4423	6.1	1.73	801.2	
		60%	6561	27.6	1107.0	4616	5.9	1.89	913.5	
		63%	7167	31.0	1242.8	4809	5.8	2.06	1037.3	
		66%	7820	34.8	1392.9	5005	5.6	2.25	1179.2	
		69%	8527	39.0	1562.4	5205	5.5	2.45	1335.3	
		72%	9290	43.8	1755.0	5411	5.3	2.67	1512.8	
		75%	10109	49.3	1975.3	5625	5.1	2.91	1714.0	
		78%	10976	55.6	2226.8	5848	4.9	3.16	1935.0	
		81%	11876	62.6	2508.7	6076	4.7	3.44	2188.6	
		84%	12785	70.3	2813.5	6303	4.5	3.73	2461.8	
		87%	13670	78.0	3123.5	6516	4.4	4.02	2742.9	
		90%	14484	85.2	3412.7	6701	4.2	4.28	3003.2	
		100%	15852	96.6	3869.2	6954	4.1	4.70	3422.4	

C8025-190KV & 24×10

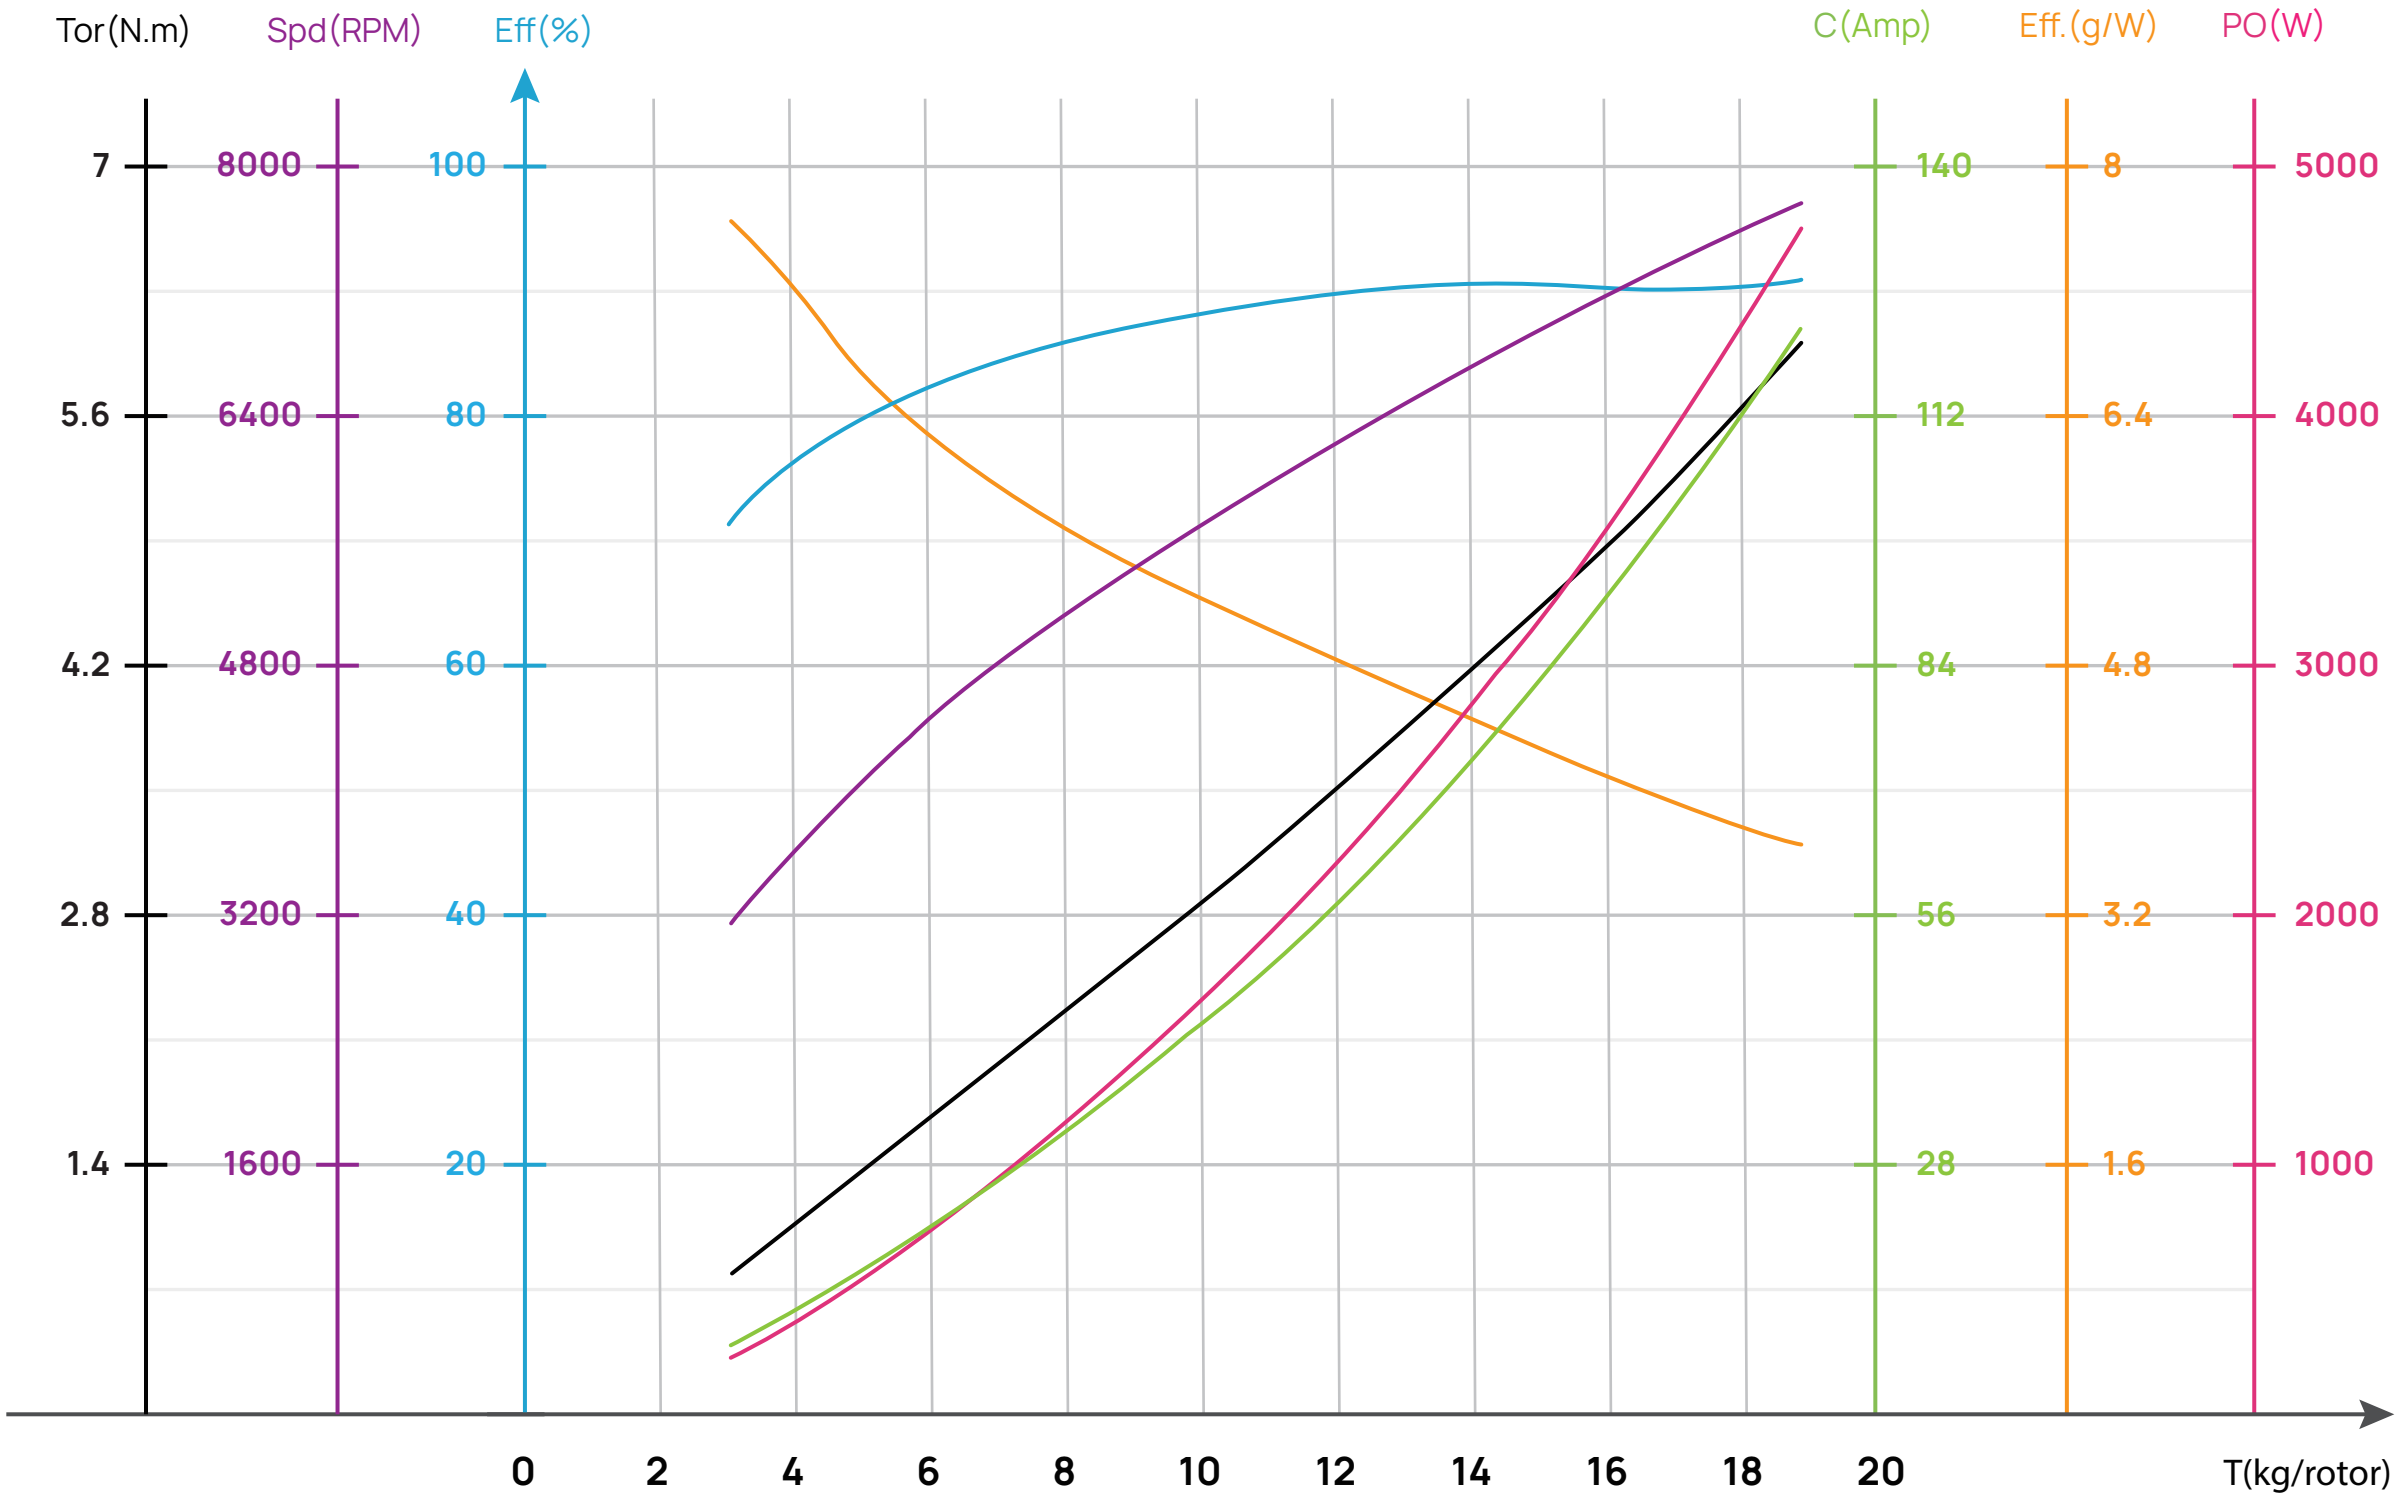

Voltage 工作电压 (V)	Propeller 螺旋桨	Throttle 油门(%)	Thrust 拉力(g)	Current 电流(A)	Power Input 输入功率(W)	Speed 转速(RPM)	Efficiency 力效(g/W)	Torque 扭矩(N·m)	Power Output 输出功率(W)	Temperature 电机温度(℃)
44V (12S LiPo)	24×10	35%	2876	8.8	387.4	3098	7.4	0.83	269.3	/
		37%	3186	9.9	436.3	3255	7.3	0.91	310.2	
		39%	3523	11.2	493.1	3418	7.1	1.01	361.5	
		42%	4065	13.4	591.9	3665	6.9	1.16	445.2	
		45%	4636	16.0	703.8	3906	6.6	1.33	544.0	
		48%	5228	18.8	826.8	4140	6.3	1.50	650.3	
		51%	5839	21.8	959.0	4364	6.1	1.68	767.7	
		54%	6472	25.0	1100.9	4581	5.9	1.86	892.2	
		57%	7131	28.4	1252.9	4794	5.7	2.05	1029.1	
		60%	7824	32.2	1417.7	5004	5.5	2.25	1179.0	
		63%	8559	36.3	1598.0	5216	5.4	2.46	1343.6	
		66%	9344	40.8	1797.6	5431	5.2	2.69	1529.8	
		69%	10184	45.9	2021.5	5651	5.0	2.94	1739.7	
		72%	11080	51.6	2274.5	5878	4.9	3.21	1975.7	
		75%	12031	58.1	2561.8	6111	4.7	3.49	2233.2	
		78%	13028	65.5	2887.5	6348	4.5	3.80	2525.9	
		81%	14054	73.8	3251.5	6585	4.3	4.14	2854.6	
		84%	15086	82.8	3648.6	6817	4.1	4.48	3197.9	
		87%	16088	92.2	4061.9	7033	4.0	4.83	3557.0	
		90%	17016	101.3	4465.2	7224	3.8	5.18	3918.4	
		100%	18711	118.6	5228.0	7542	3.6	5.84	4612.1	

C8025-190KV & 24×10

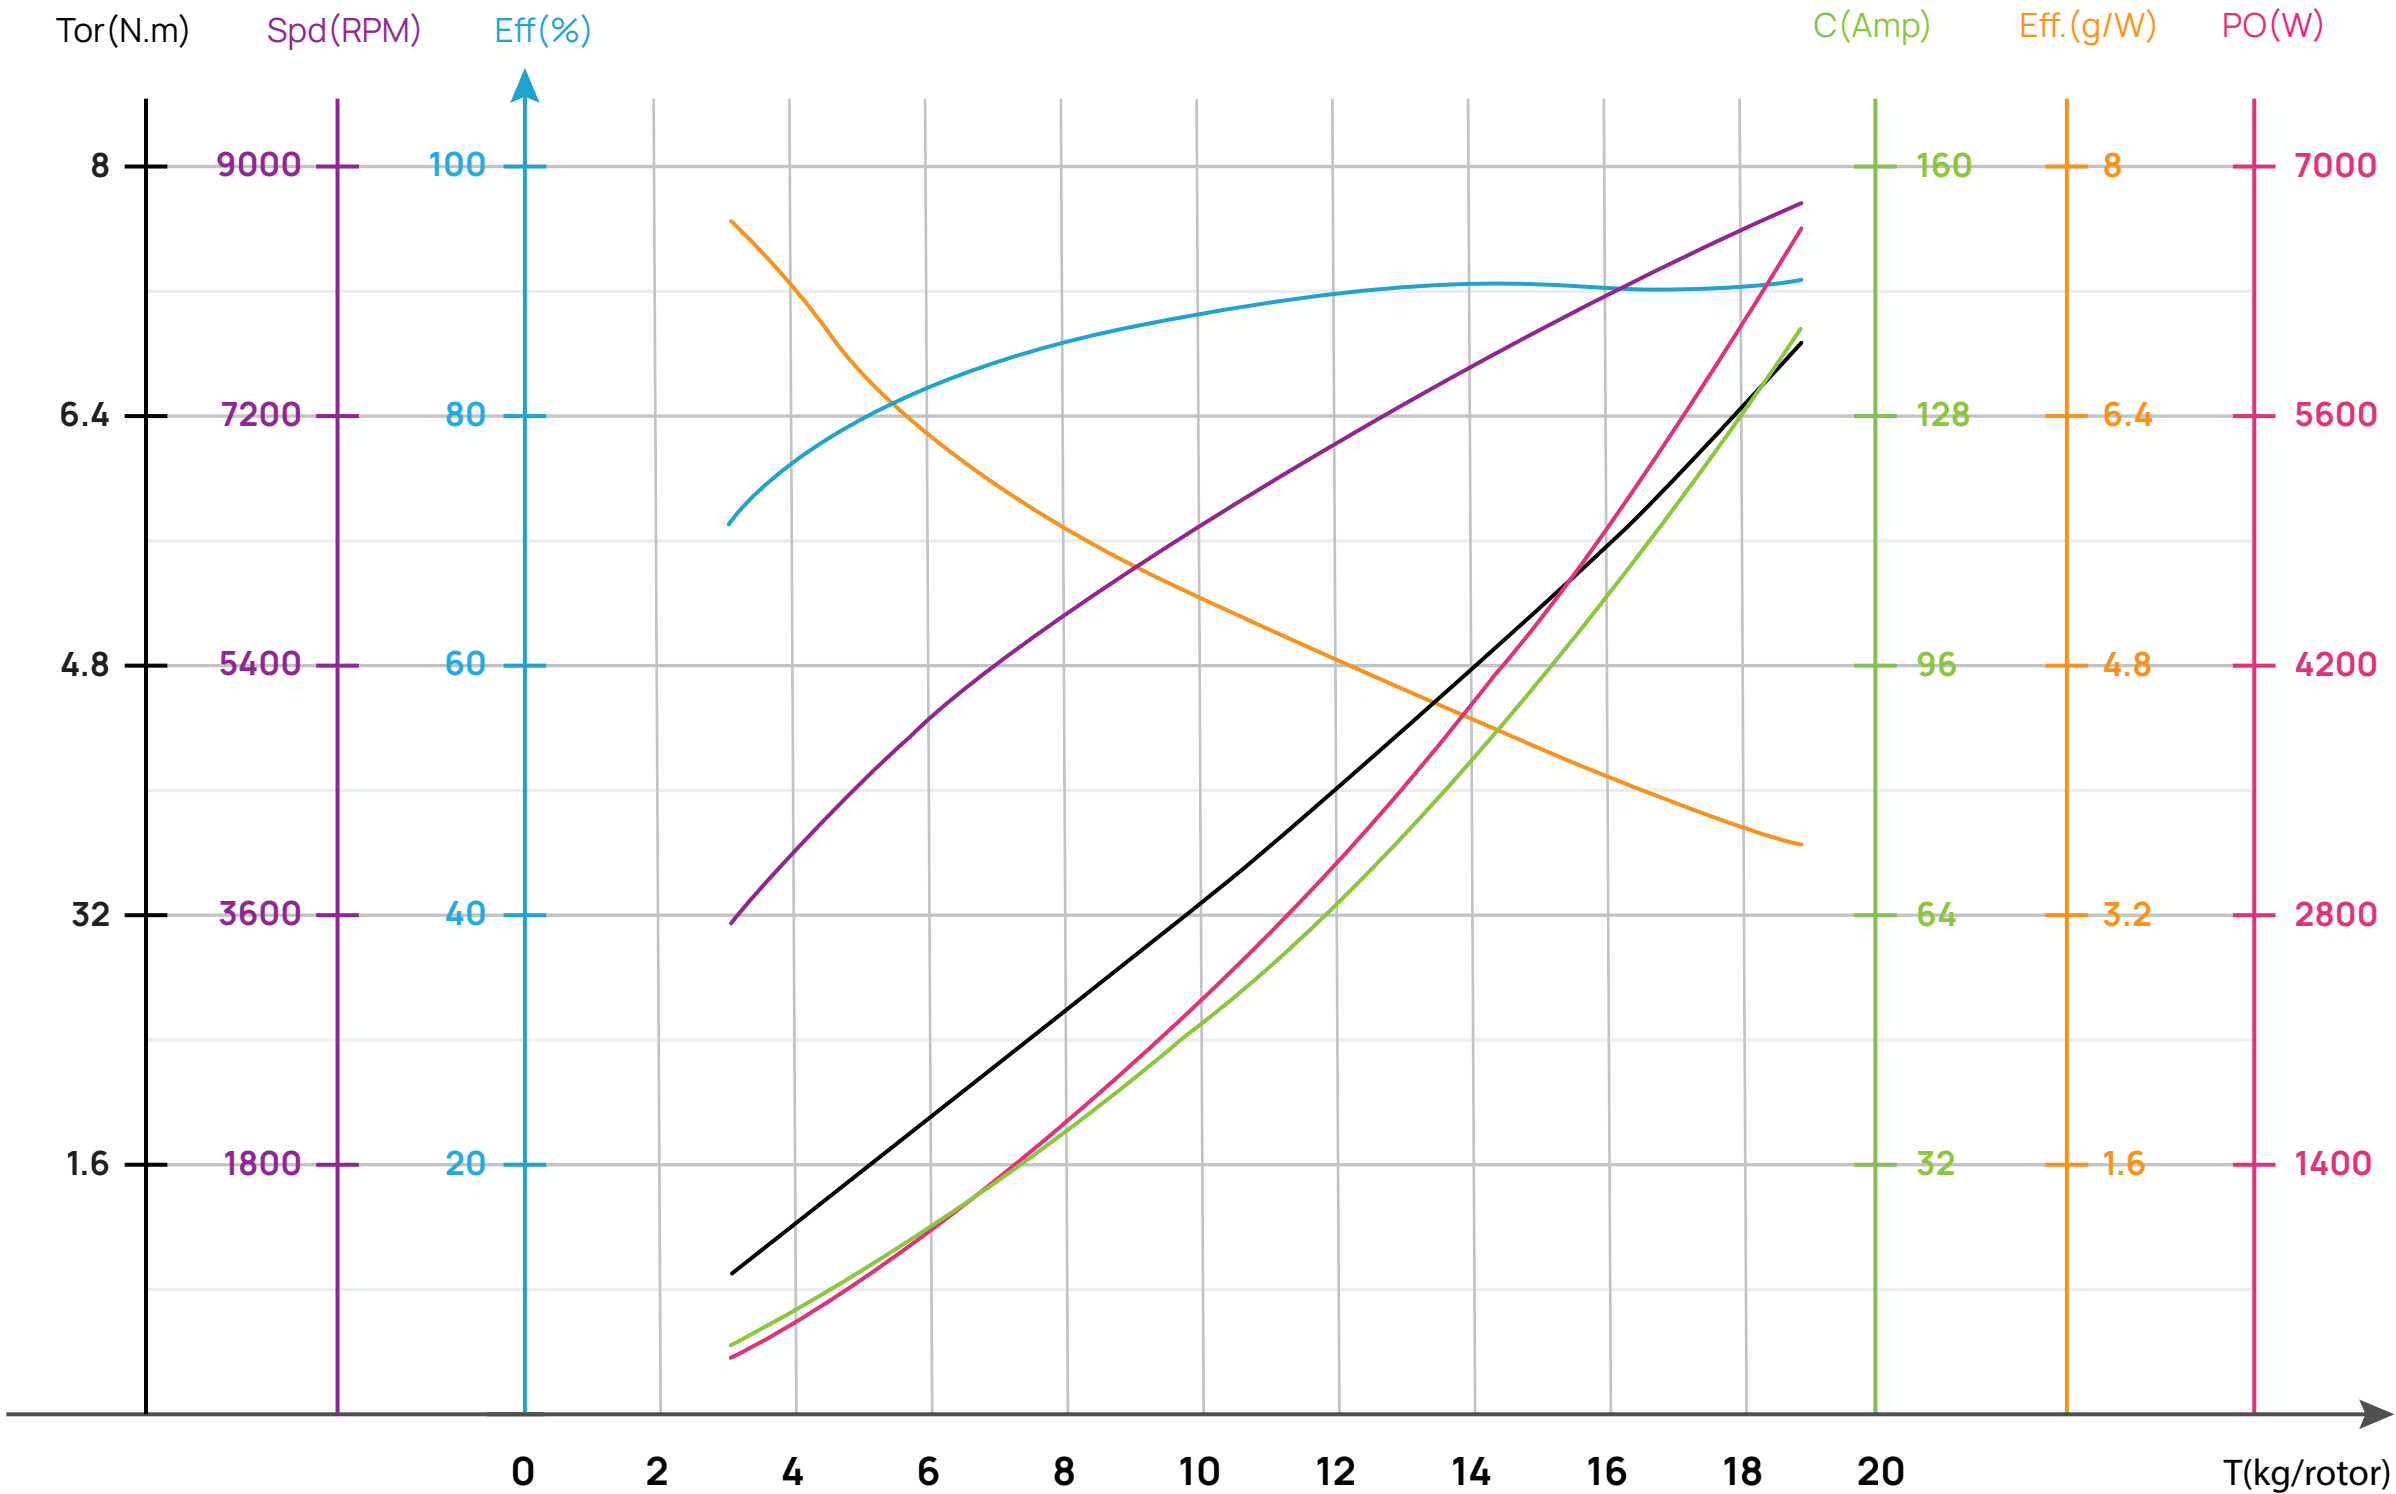

Voltage 工作电压 (V)	Propeller 螺旋桨	Throttle 油门 (%)	Thrust 拉力 (g)	Current 电流 (A)	Power Input 输入功率 (W)	Speed 转速 (RPM)	Efficiency 力效 (g/W)	Torque 扭矩 (N·m)	Power Output 输出功率 (W)	Temperature 电机温度 (°C)
48V (12S LiPo)	24×10	35%	3347	9.7	467.6	3334	7.2	0.95	331.7	75°C
		37%	3693	10.9	522.4	3499	7.1	1.05	384.7	
		39%	4073	12.3	589.7	3672	6.9	1.16	446.0	
		42%	4689	14.8	712.7	3937	6.6	1.34	552.4	
		45%	5345	17.9	857.9	4200	6.2	1.54	677.3	
		48%	6032	21.2	1019.8	4455	5.9	1.75	816.4	
		51%	6747	24.9	1194.8	4701	5.6	1.96	964.8	
		54%	7490	28.7	1381.2	4939	5.4	2.19	1132.6	
		57%	8266	32.9	1578.8	5171	5.2	2.42	1310.3	
		60%	9081	37.2	1789.3	5399	5.1	2.66	1503.8	
		63%	9942	42.0	2016.1	5628	4.9	2.91	1714.9	
		66%	10856	47.1	2265.1	5858	4.8	3.17	1944.5	
		69%	11826	52.9	2543.8	6093	4.6	3.45	2201.1	
		72%	12854	59.6	2862.5	6334	4.5	3.76	2493.8	
		75%	13935	67.3	3233.0	6582	4.3	4.11	2832.7	
		78%	15058	76.3	3665.1	6835	4.1	4.49	3213.5	
		81%	16206	86.6	4163.0	7089	3.9	4.91	3644.7	
		84%	17351	98.2	4718.5	7337	3.7	5.36	4117.9	
		87%	18456	110.4	5305.8	7569	3.5	5.83	4620.7	
		90%	19472	122.3	5878.7	7772	3.3	6.28	5110.8	
		100%	21297	144.2	6931.7	8096	3.1	7.11	6027.5	