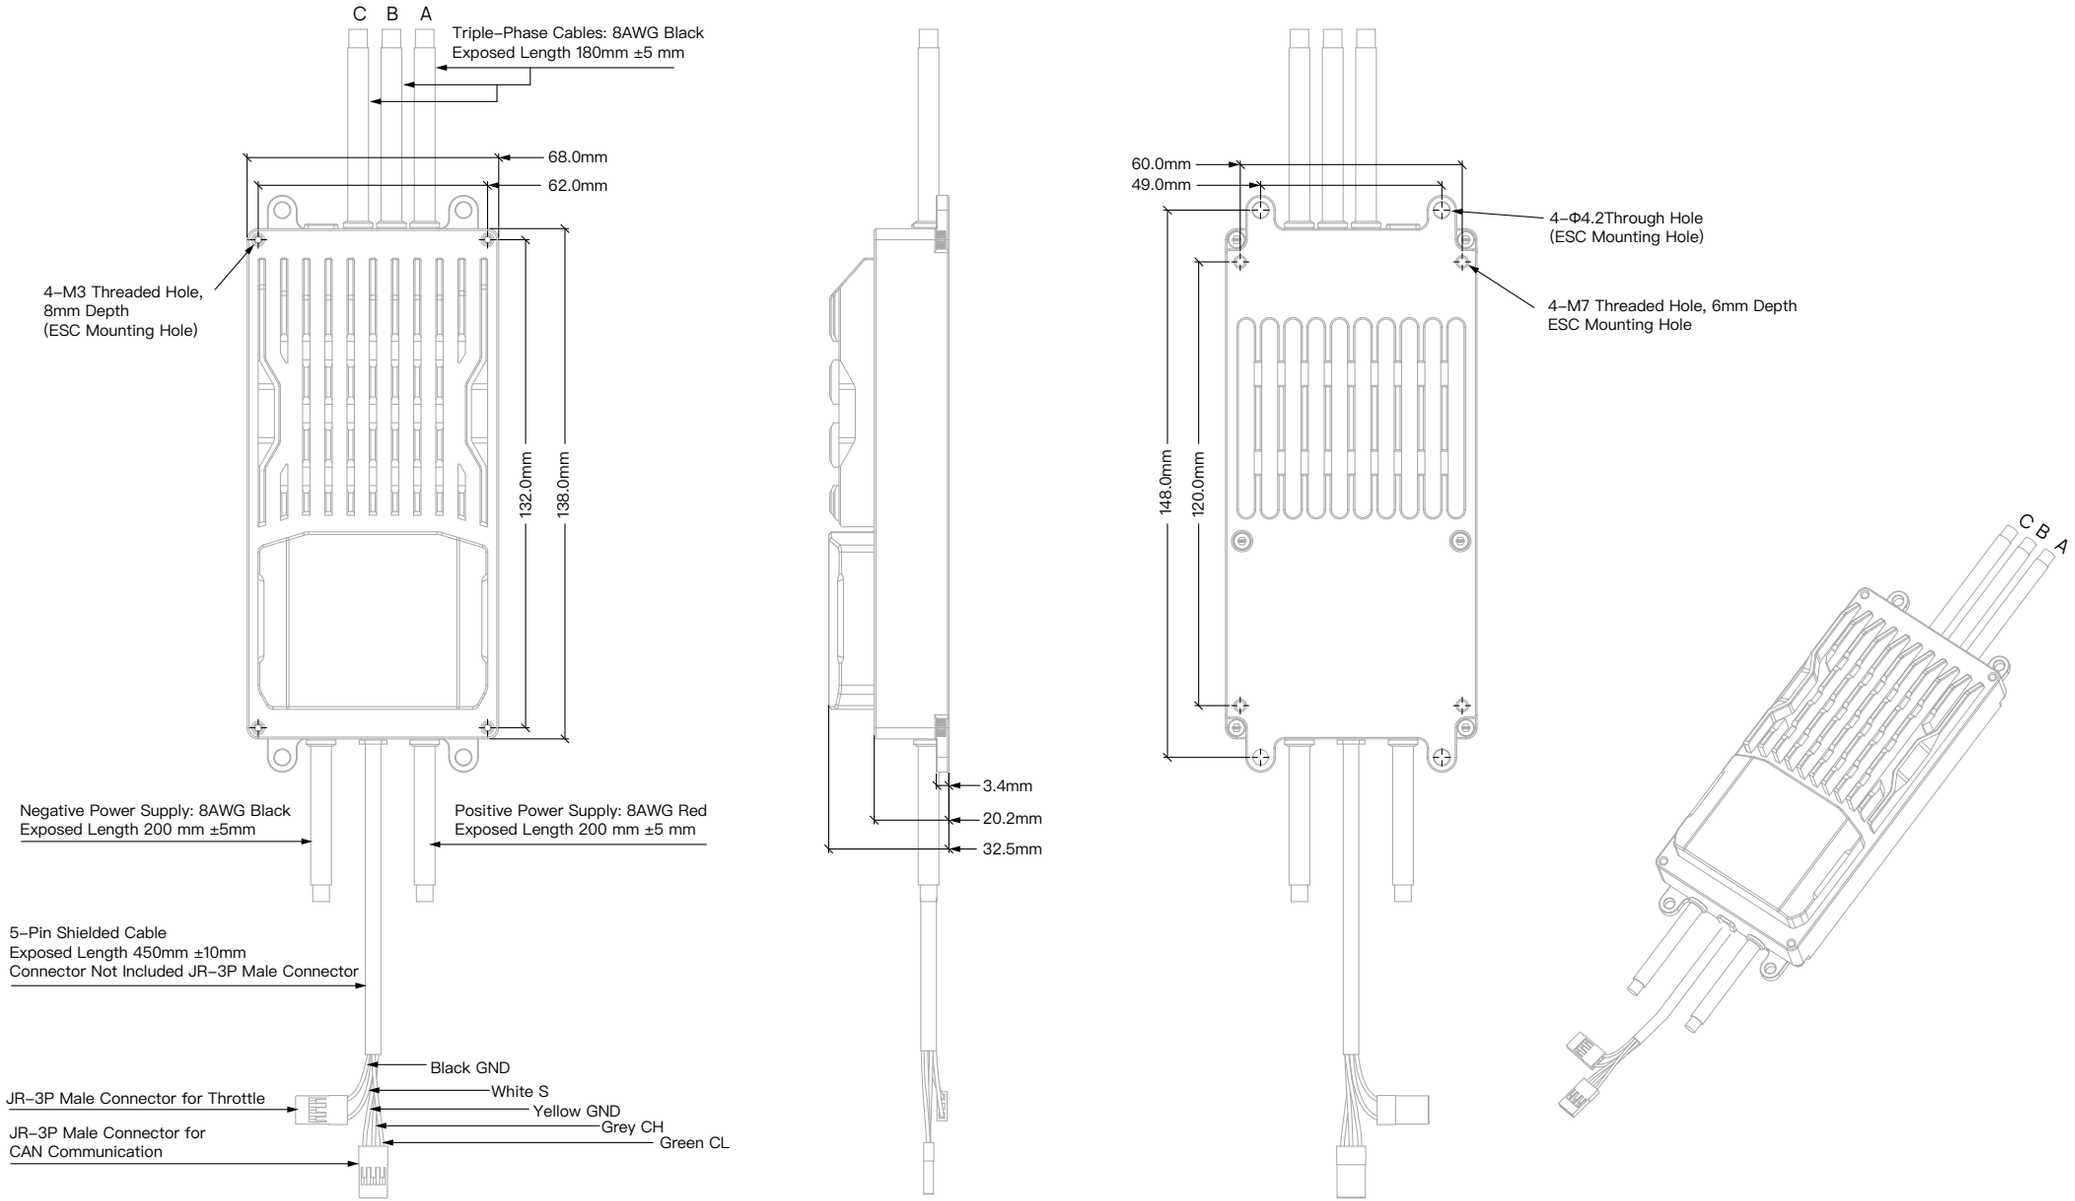
C B A
Triple-Phase Cables: 8AWG Black
Exposed Length 180mm ±5 mm
68.0mm
62.0mm
4-M3 Threaded Hole,
8mm Depth
(ESC Mounting Hole)
132.0mm
138.0mm
Negative Power Supply: 8AWG Black
Exposed Length 200 mm ±5mm
Positive Power Supply: 8AWG Red
Exposed Length 200 mm ±5 mm
5-Pin Shielded Cable
Exposed Length 450mm ±10mm
Connector Not Included JR-3P Male Connector
Black GND
White S
Yellow GND
Grey CH
Green CL
JR-3P Male Connector for Throttle
JR-3P Male Connector for
CAN Communication
3.4mm
20.2mm
32.5mm
60.0mm
49.0mm
4-Φ4.2Through Hole
(ESC Mounting Hole)
4-M7 Threaded Hole, 6mm Depth
ESC Mounting Hole
148.0mm
120.0mm
C B A