




LOAD PERFORMANCE PARAMETERS

负载性能参数

以下数据为好盈实验室于室温 25°C、海平面高度，变化油门输入调节测得，仅供参考。


The below data was measured by HOBBYWING Laboratory at room temperature 25°C, at sea level,
with varying throttle input, for reference only.

H15MD Plus-92V & MSC 73x21 (上轴/Upper Rotor)

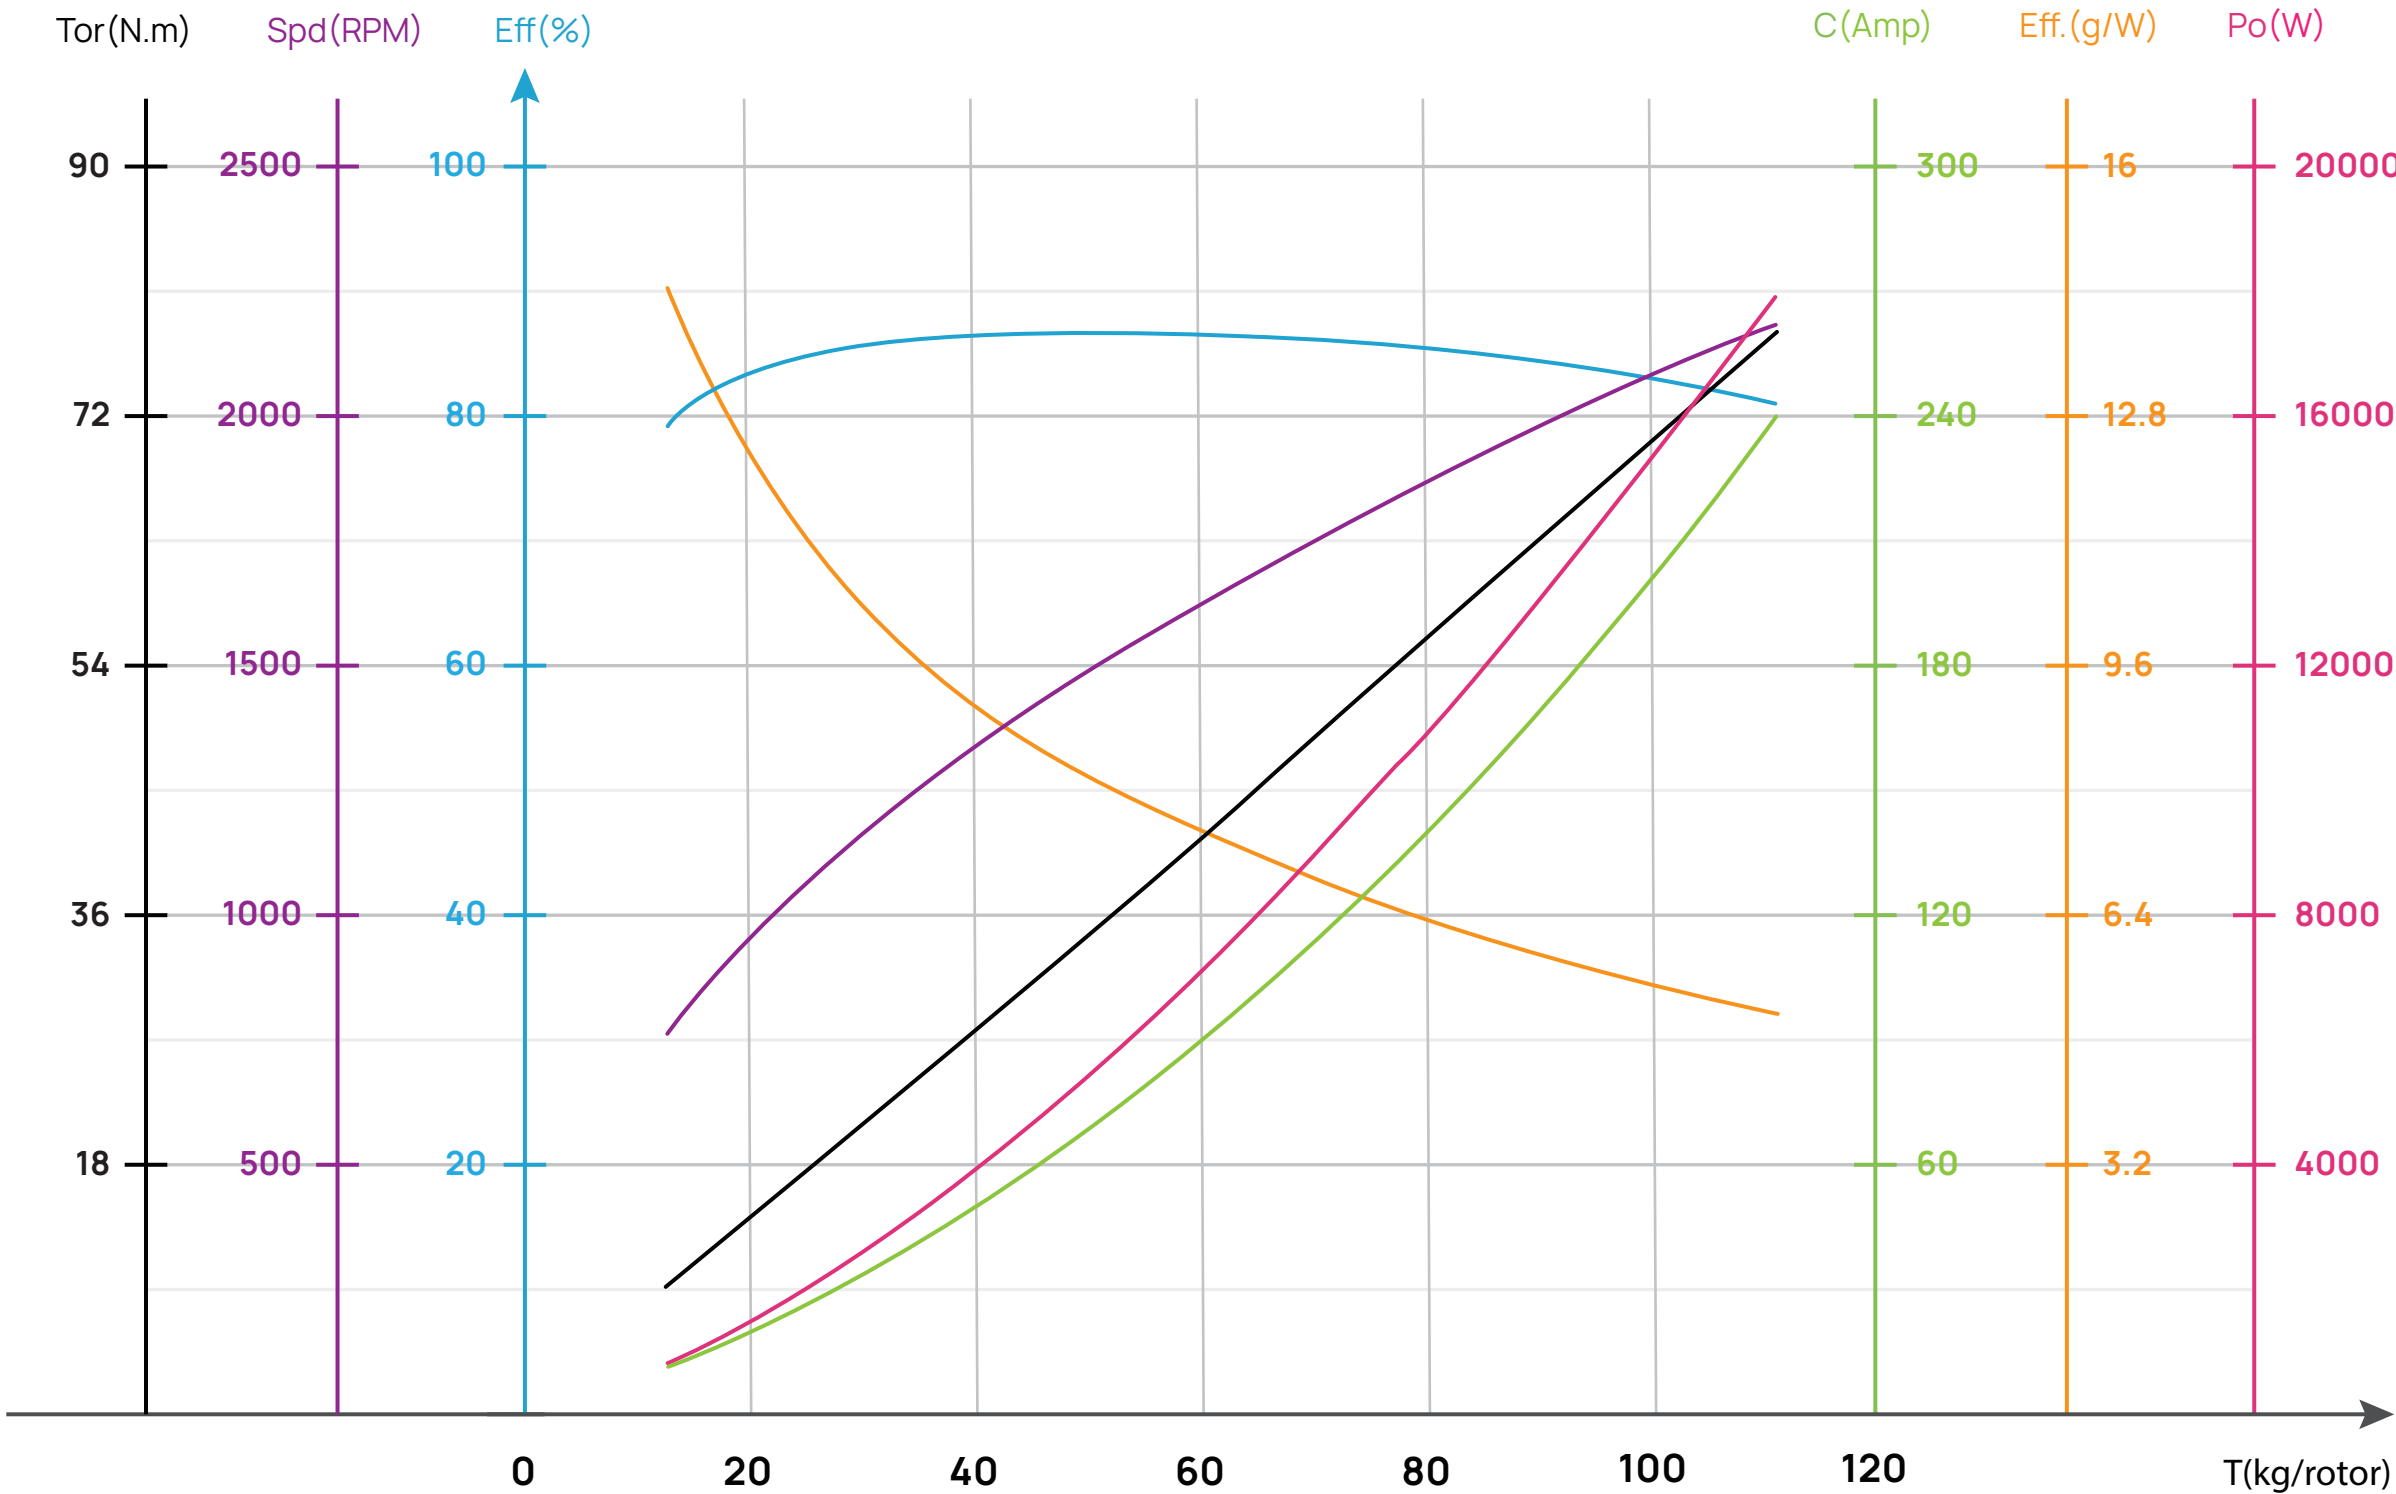


Voltage 工作电压 (V)	Propeller 螺旋桨	Throttle 油门 (%)	Thrust 拉力 (g)	Current 电流 (A)	Power Input 输入功率 (W)	Speed 转速 (RPM)	Efficiency 力效 (g/W)	Torque 扭矩 (N · m)	Power Output 输出功率 (W)	Temperature 电机温度 (°C)
92V (24S LiPo)	MSC 73x21	33%	13110	10.0	922.7	773	14.2	9.12	738.3	/
		38%	17811	15.1	1388.2	895	12.8	12.28	1151.2	
		42%	22285	20.6	1896.6	1000	11.7	15.31	1602.7	
		44%	24726	23.9	2198.0	1052	11.2	16.96	1868.0	
		46%	27294	27.5	2532.0	1105	10.8	18.70	2163.7	
		48%	29987	31.5	2899.8	1158	10.3	20.53	2489.3	
		50%	32807	35.9	3303.0	1210	9.9	22.45	2844.3	
		52%	35755	40.7	3743.4	1262	9.6	24.46	3232.1	
		54%	38833	45.9	4223.2	1313	9.2	26.56	3651.8	
		56%	42045	51.6	4744.9	1365	8.9	28.76	4110.8	
		58%	45392	57.7	5311.2	1416	8.5	31.06	4605.2	
		60%	48877	64.4	5925.0	1467	8.2	33.46	5139.6	
		62%	52500	71.6	6589.5	1518	8.0	35.96	5716.1	
		64%	56256	79.4	7307.8	1569	7.7	38.57	6336.1	
		66%	60141	87.8	8082.7	1620	7.4	41.27	7001.1	
		68%	64145	96.9	8916.7	1672	7.2	44.07	7716.3	
		70%	68253	106.6	9811.3	1723	7.0	46.96	8472.8	
		72%	72447	117.0	10766.8	1774	6.7	49.93	9274.1	
		76%	80986	139.7	12850.4	1875	6.3	56.00	10994.9	
		80%	89478	164.3	15115.1	1970	5.9	62.09	12807.1	
		85%	99399	195.7	18005.5	2073	5.5	69.20	15020.8	
		100%	112198	240.0	22089.4	2189	5.1	78.23	17932.2	

H15MD Plus-92V & MSC 73x21 (下轴/Lower Rotor)

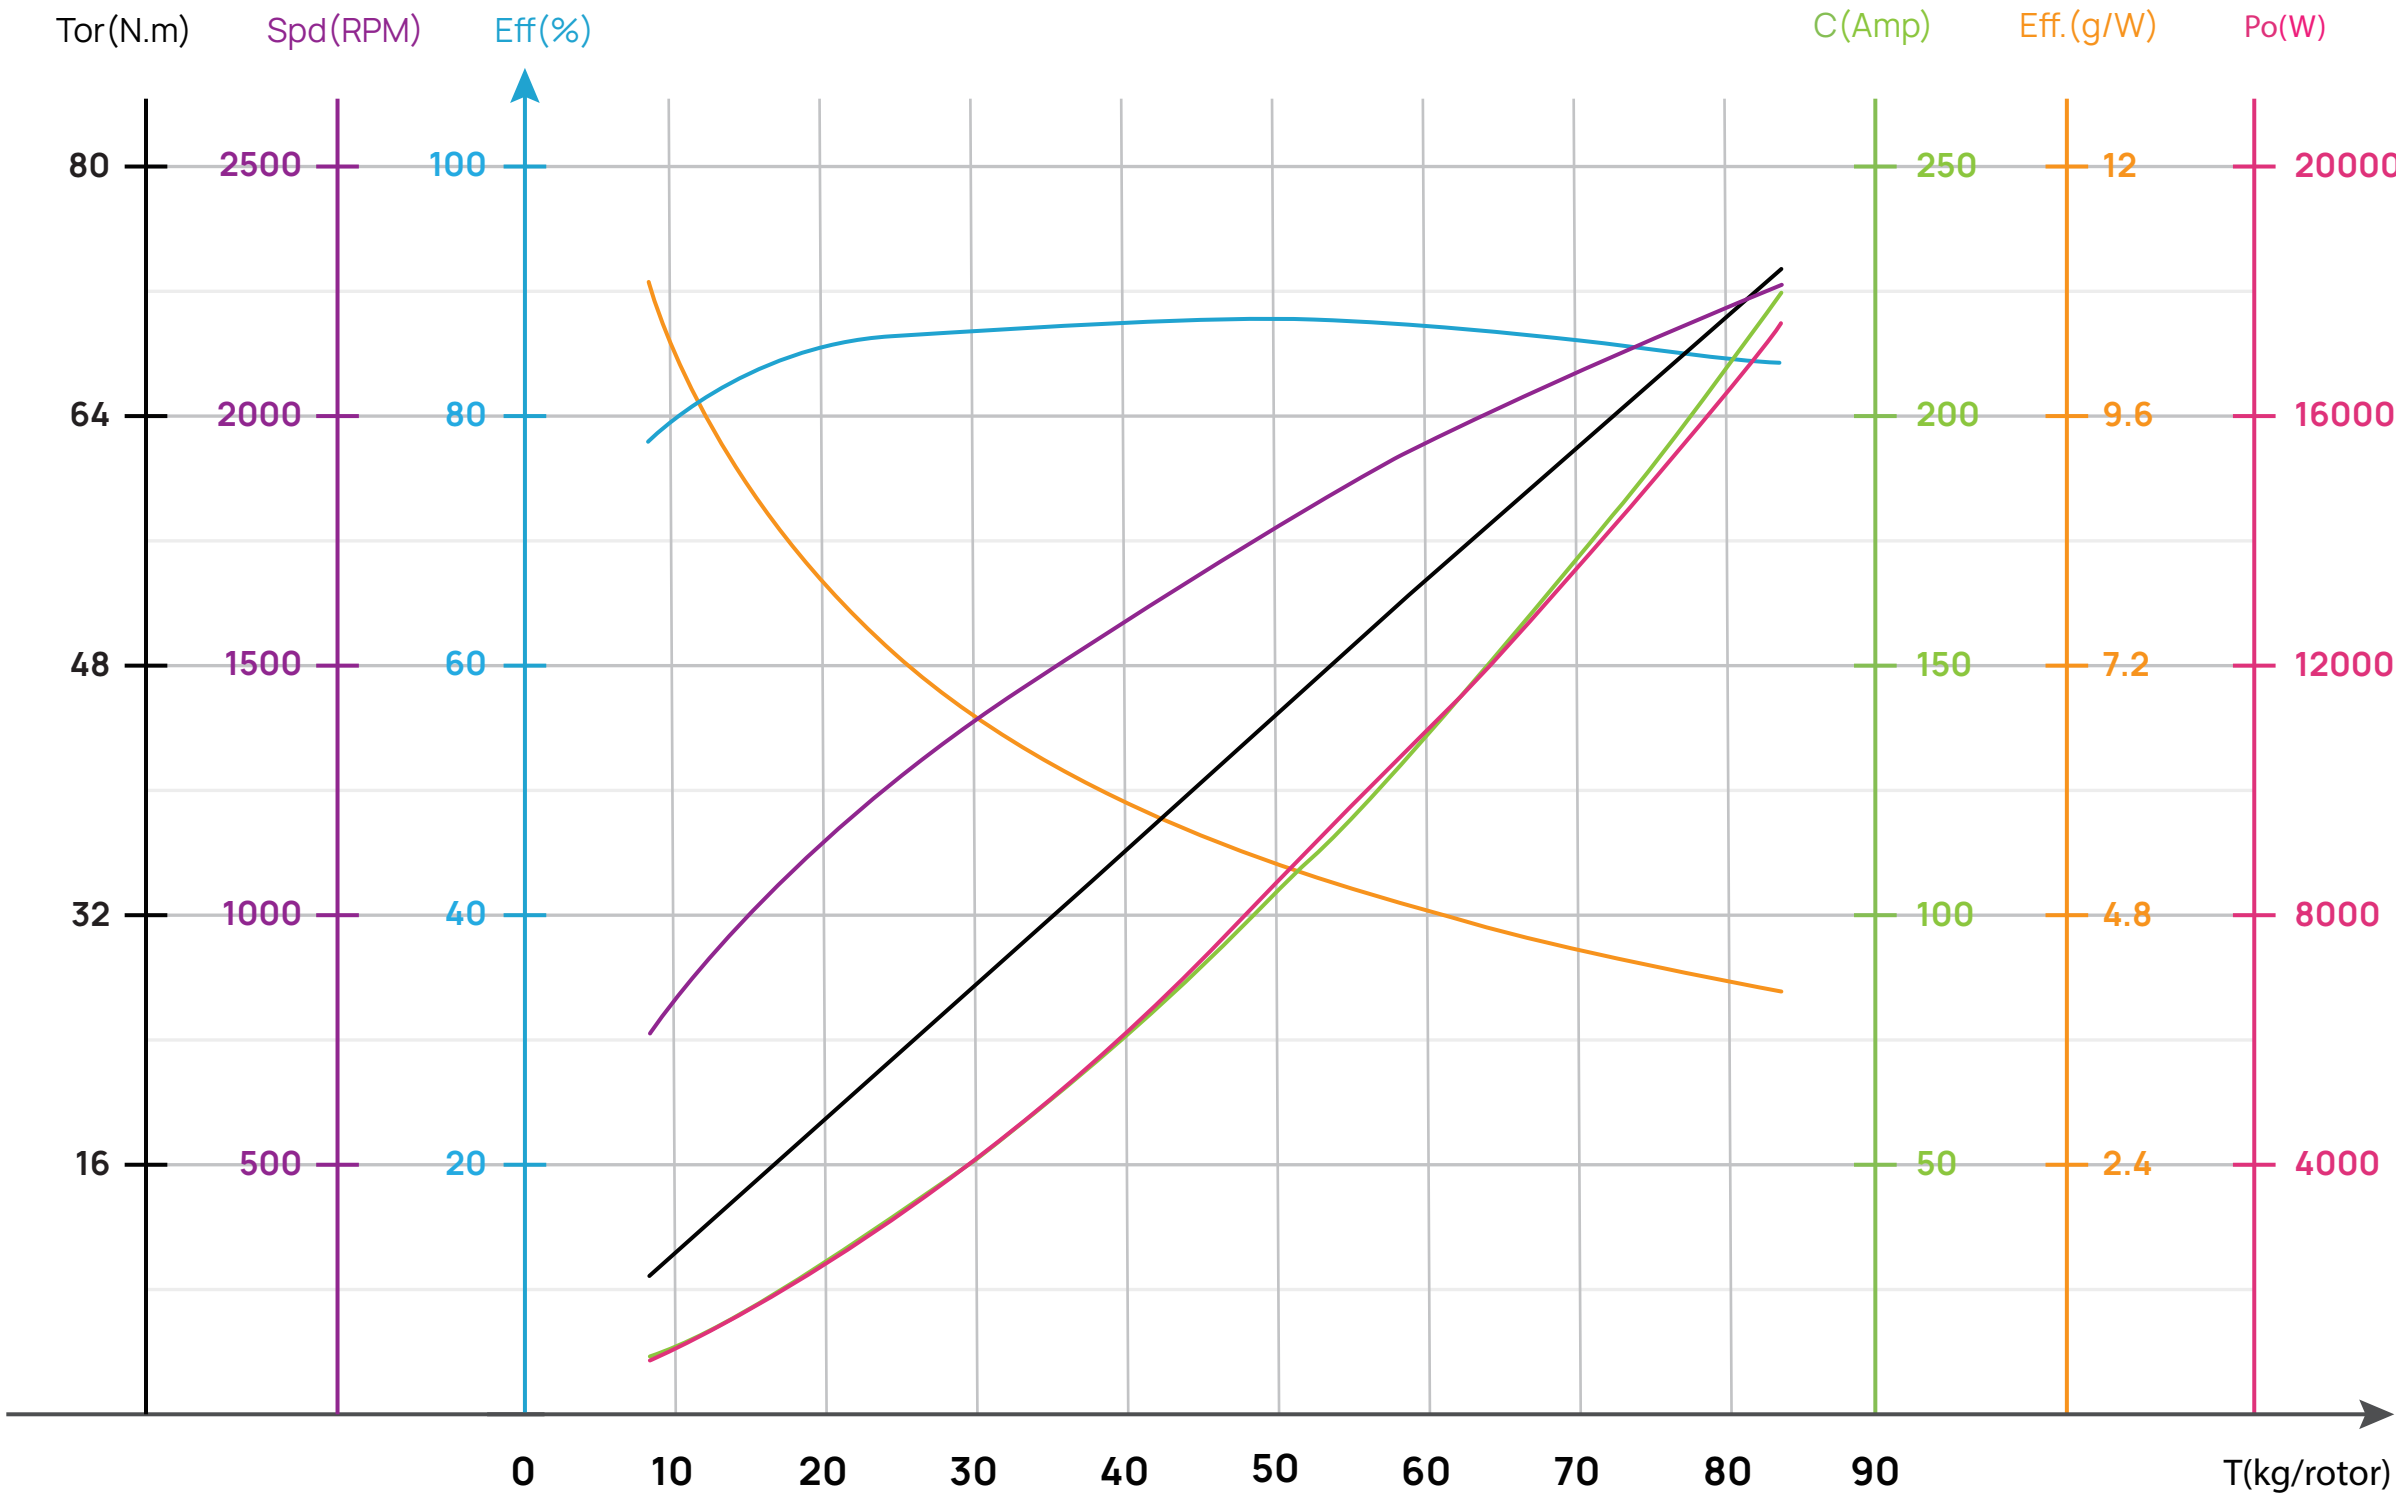


Voltage 工作电压 (V)	Propeller 螺旋桨	Throttle 油门 (%)	Thrust 拉力 (g)	Current 电流 (A)	Power Input 输入功率 (W)	Speed 转速 (RPM)	Efficiency 力效 (g/W)	Torque 扭矩 (N · m)	Power Output 输出功率 (W)	Temperature 电机温度 (°C)
92V (24S LiPo)	MSC 73x21	33%	9125	9.2	850.7	762	10.7	8.38	668.4	/
		38%	12196	13.7	1263.0	884	9.7	11.14	1030.9	
		42%	15274	18.7	1719.5	991	8.9	13.88	1440.3	
		44%	16971	21.6	1989.5	1046	8.5	15.39	1685.2	
		46%	18760	24.9	2287.9	1099	8.2	16.97	1953.1	
		48%	20635	28.4	2615.9	1153	7.9	18.63	2249.7	
		50%	22594	32.3	2974.7	1205	7.6	20.37	2570.4	
		52%	24636	36.6	3366.4	1258	7.3	22.19	2922.5	
		54%	26765	41.2	3793.1	1309	7.1	24.08	3300.8	
		56%	28983	46.3	4257.3	1361	6.8	26.06	3714.0	
		58%	31294	51.8	4762.0	1414	6.6	28.13	4165.0	
		60%	33703	57.7	5310.1	1466	6.3	30.29	4650.0	
		62%	36213	64.2	5904.4	1519	6.1	32.55	5177.3	
		64%	38827	71.2	6547.8	1573	5.9	34.91	5749.3	
		66%	41545	78.7	7242.6	1628	5.7	37.36	6368.4	
		68%	44366	86.8	7990.7	1683	5.6	39.90	7032.1	
		70%	47287	95.6	8793.1	1738	5.4	42.53	7740.7	
		72%	50299	104.9	9649.5	1794	5.2	45.24	8498.4	
		76%	56545	125.2	11517.1	1902	4.9	50.81	10119.5	
		80%	62951	147.4	13558.9	2003	4.6	56.45	11840.2	
		85%	70798	176.5	16239.8	2113	4.4	63.27	13999.7	
		100%	82787	225.8	20775.3	2273	4.0	73.75	17554.0	

H15MD Plus-92V & MSC 73x21 (共轴/Coaxial Load)

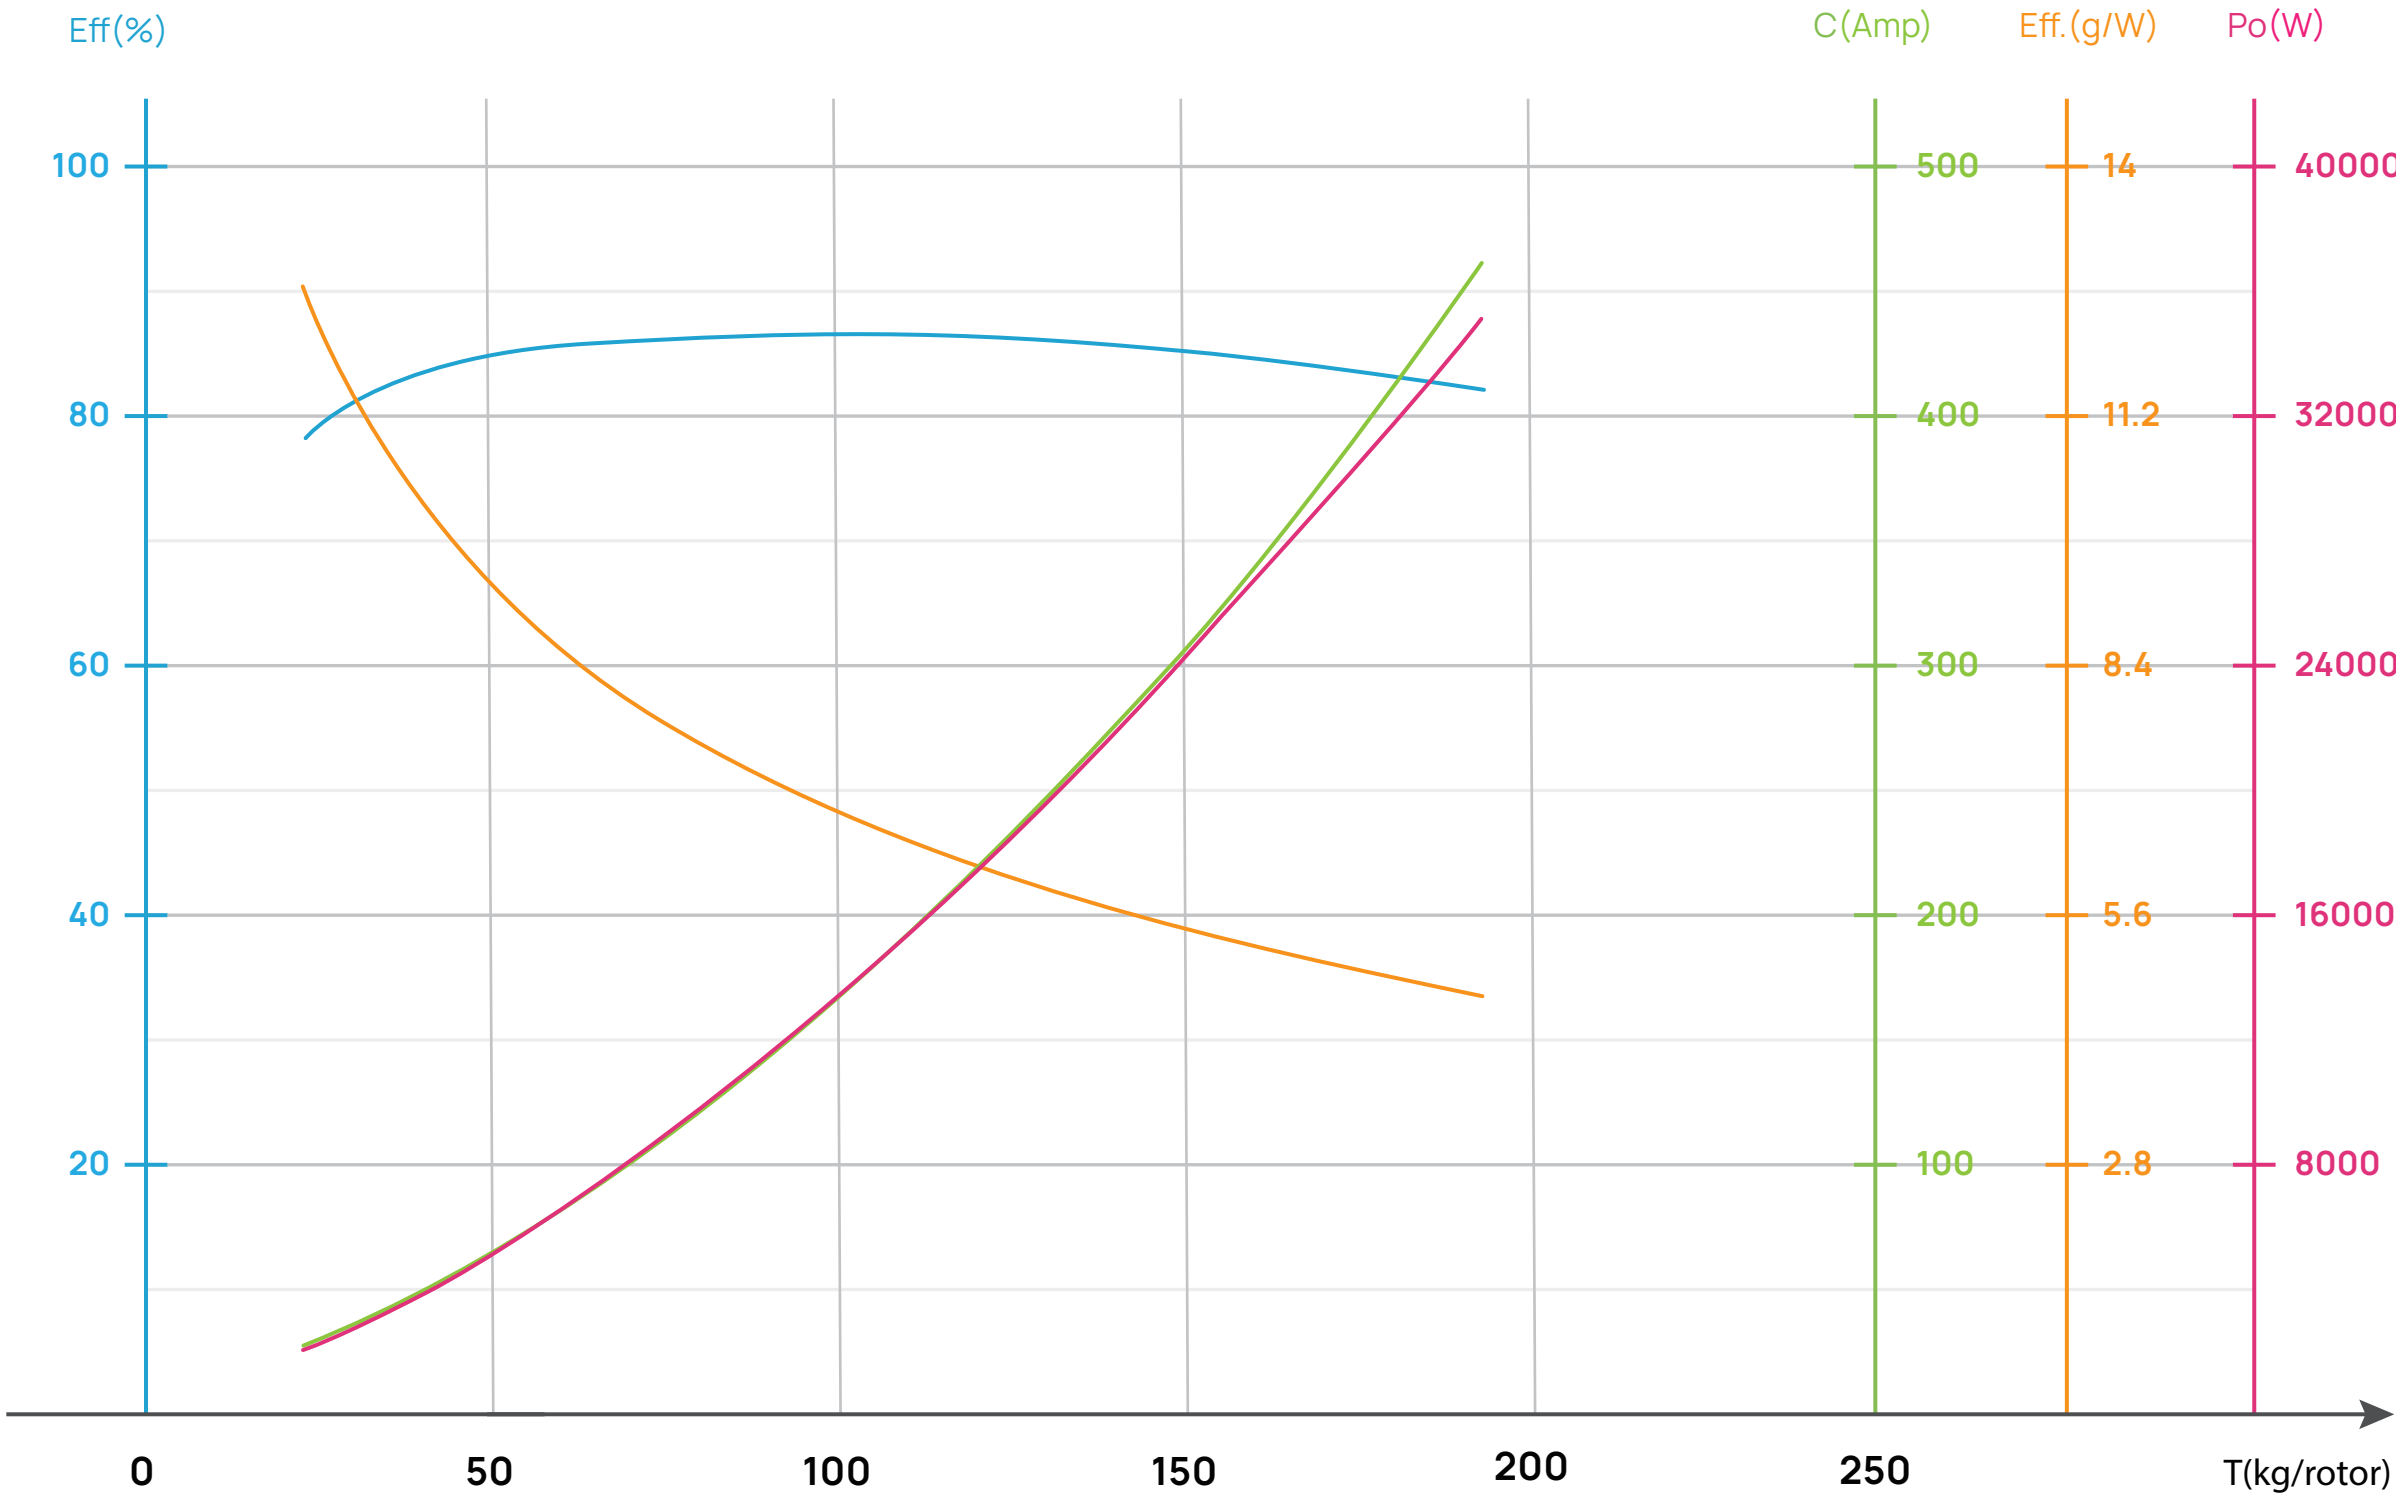


Voltage 工作电压(V)	Propeller 螺旋桨	Throttle 油门(%)	Thrust 拉力(g)	Current 电流(A)	Power Input 输入功率(W)	Efficiency 效率(%)	Efficiency 力效(g/W)	Power Output 输出功率(W)	Temperature 电机温度(℃)
92V (24S LiPo)	MSC 73x21	33%	22234	19.3	1773.4	79.35	12.5	1407.2	/
		38%	30007	28.8	2651.2	82.32	11.3	2182.4	
		42%	37559	39.3	3616.1	84.16	10.4	3043.3	
		44%	41697	45.5	4187.4	84.86	10.0	3553.5	
		46%	46053	52.4	4819.9	85.44	9.6	4118.1	
		48%	50622	60.0	5515.6	85.90	9.2	4737.9	
		50%	55401	68.2	6277.7	86.26	8.8	5415.2	
		52%	60391	77.3	7109.8	86.55	8.5	6153.5	
		54%	65598	87.1	8016.3	86.76	8.2	6954.9	
		56%	71028	97.8	9002.2	86.93	7.9	7825.6	
		58%	76687	109.5	10073.2	87.05	7.6	8768.7	
		60%	82580	122.1	11235.0	87.14	7.4	9790.2	
		62%	88713	135.8	12493.9	87.20	7.1	10894.7	
		64%	95083	150.6	13855.5	87.24	6.9	12087.6	
		66%	101686	166.6	15325.3	87.25	6.6	13371.3	
		68%	108511	183.8	16907.4	87.23	6.4	14748.3	
		70%	115540	202.2	18604.4	87.17	6.2	16217.5	
		72%	122746	221.9	20416.3	87.06	6.0	17774.5	
		76%	137530	264.8	24367.5	86.65	5.6	21114.4	
		80%	152430	311.6	28674.1	85.95	5.3	24645.3	
		85%	170197	372.2	34245.4	84.74	5.0	29019.5	
		100%	194985	465.8	42864.7	82.79	4.5	35487.7	

H15MD Plus-108V & MSC 73x21 (上轴/Upper Rotor)

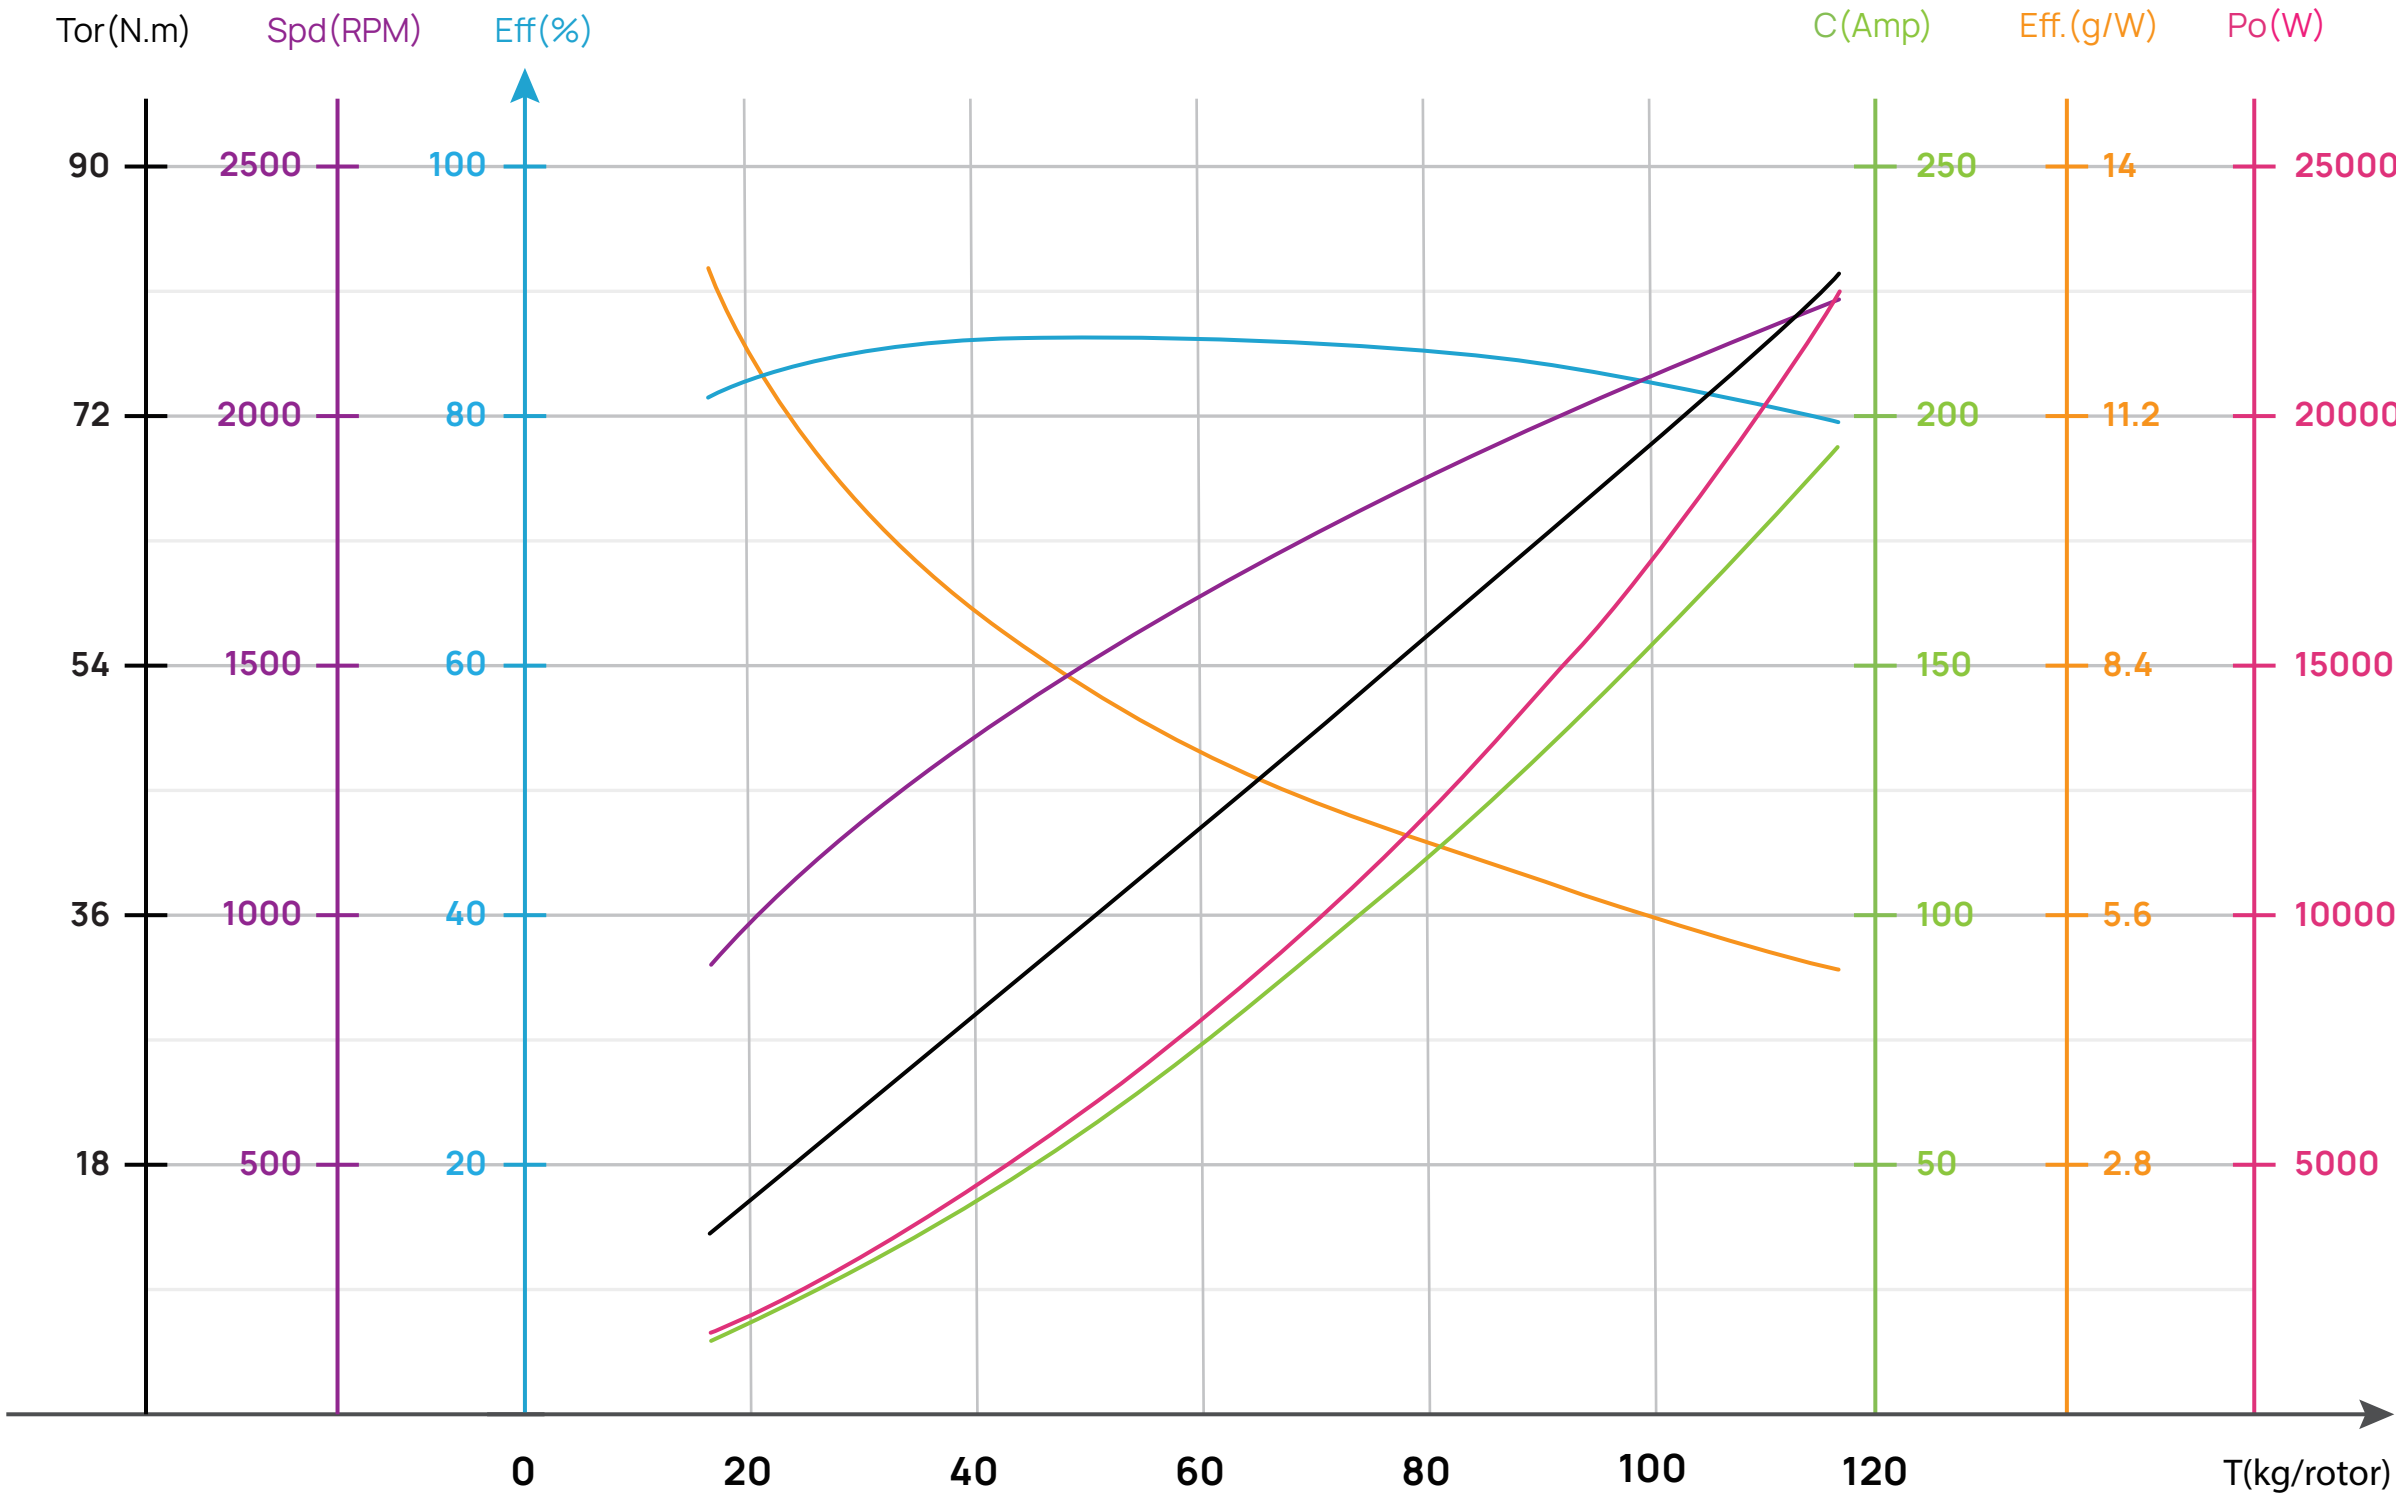


Voltage 工作电压 (V)	Propeller 螺旋桨	Throttle 油门 (%)	Thrust 拉力 (g)	Current 电流 (A)	Power Input 输入功率 (W)	Speed 转速 (RPM)	Efficiency 力效 (g/W)	Torque 扭矩 (N · m)	Power Output 输出功率 (W)	Temperature 电机温度 (°C)
108V (28S LiPo)	MSC 73x21	33%	17953	13.2	1426.0	902	12.6	12.38	1168.9	/
		38%	24240	20.1	2174.5	1046	11.1	16.69	1827.9	
		42%	30437	27.7	2997.4	1169	10.2	20.90	2557.8	
		44%	33784	32.2	3477.4	1230	9.7	23.16	2983.5	
		46%	37264	37.1	4003.0	1289	9.3	25.53	3445.6	
		48%	40871	42.4	4575.9	1348	8.9	27.98	3950.0	
		50%	44606	48.1	5199.2	1405	8.6	30.54	4492.9	
		52%	48477	54.4	5877.3	1462	8.2	33.20	5082.5	
		54%	52497	61.2	6615.4	1519	7.9	35.98	5722.4	
		56%	56679	68.7	7419.5	1576	7.6	38.88	6416.1	
		58%	61034	76.8	8296.1	1633	7.4	41.91	7167.1	
		60%	65569	85.6	9251.4	1691	7.1	45.08	7982.9	
		62%	70282	95.3	10290.9	1749	6.8	48.38	8861.1	
		64%	75163	105.7	11418.6	1807	6.6	51.80	9802.1	
		66%	80186	117.0	12636.4	1865	6.3	55.32	10804.0	
		68%	85312	129.1	13942.9	1922	6.1	58.91	11856.7	
		70%	90481	141.9	15331.7	1977	5.9	62.54	12945.9	
		72%	95613	155.4	16789.1	2029	5.7	66.14	14052.8	
		74%	100601	169.3	18290.8	2079	5.5	69.68	15168.0	
		76%	105315	183.2	19797.0	2124	5.3	73.05	16248.0	
		80%	113231	208.7	22551.6	2197	5.0	78.90	18150.1	
		100%	117952	225.4	24352.1	2240	4.8	82.53	19358.6	

H15MD Plus-108V & MSC 73x21 (下轴/Lower Rotor)

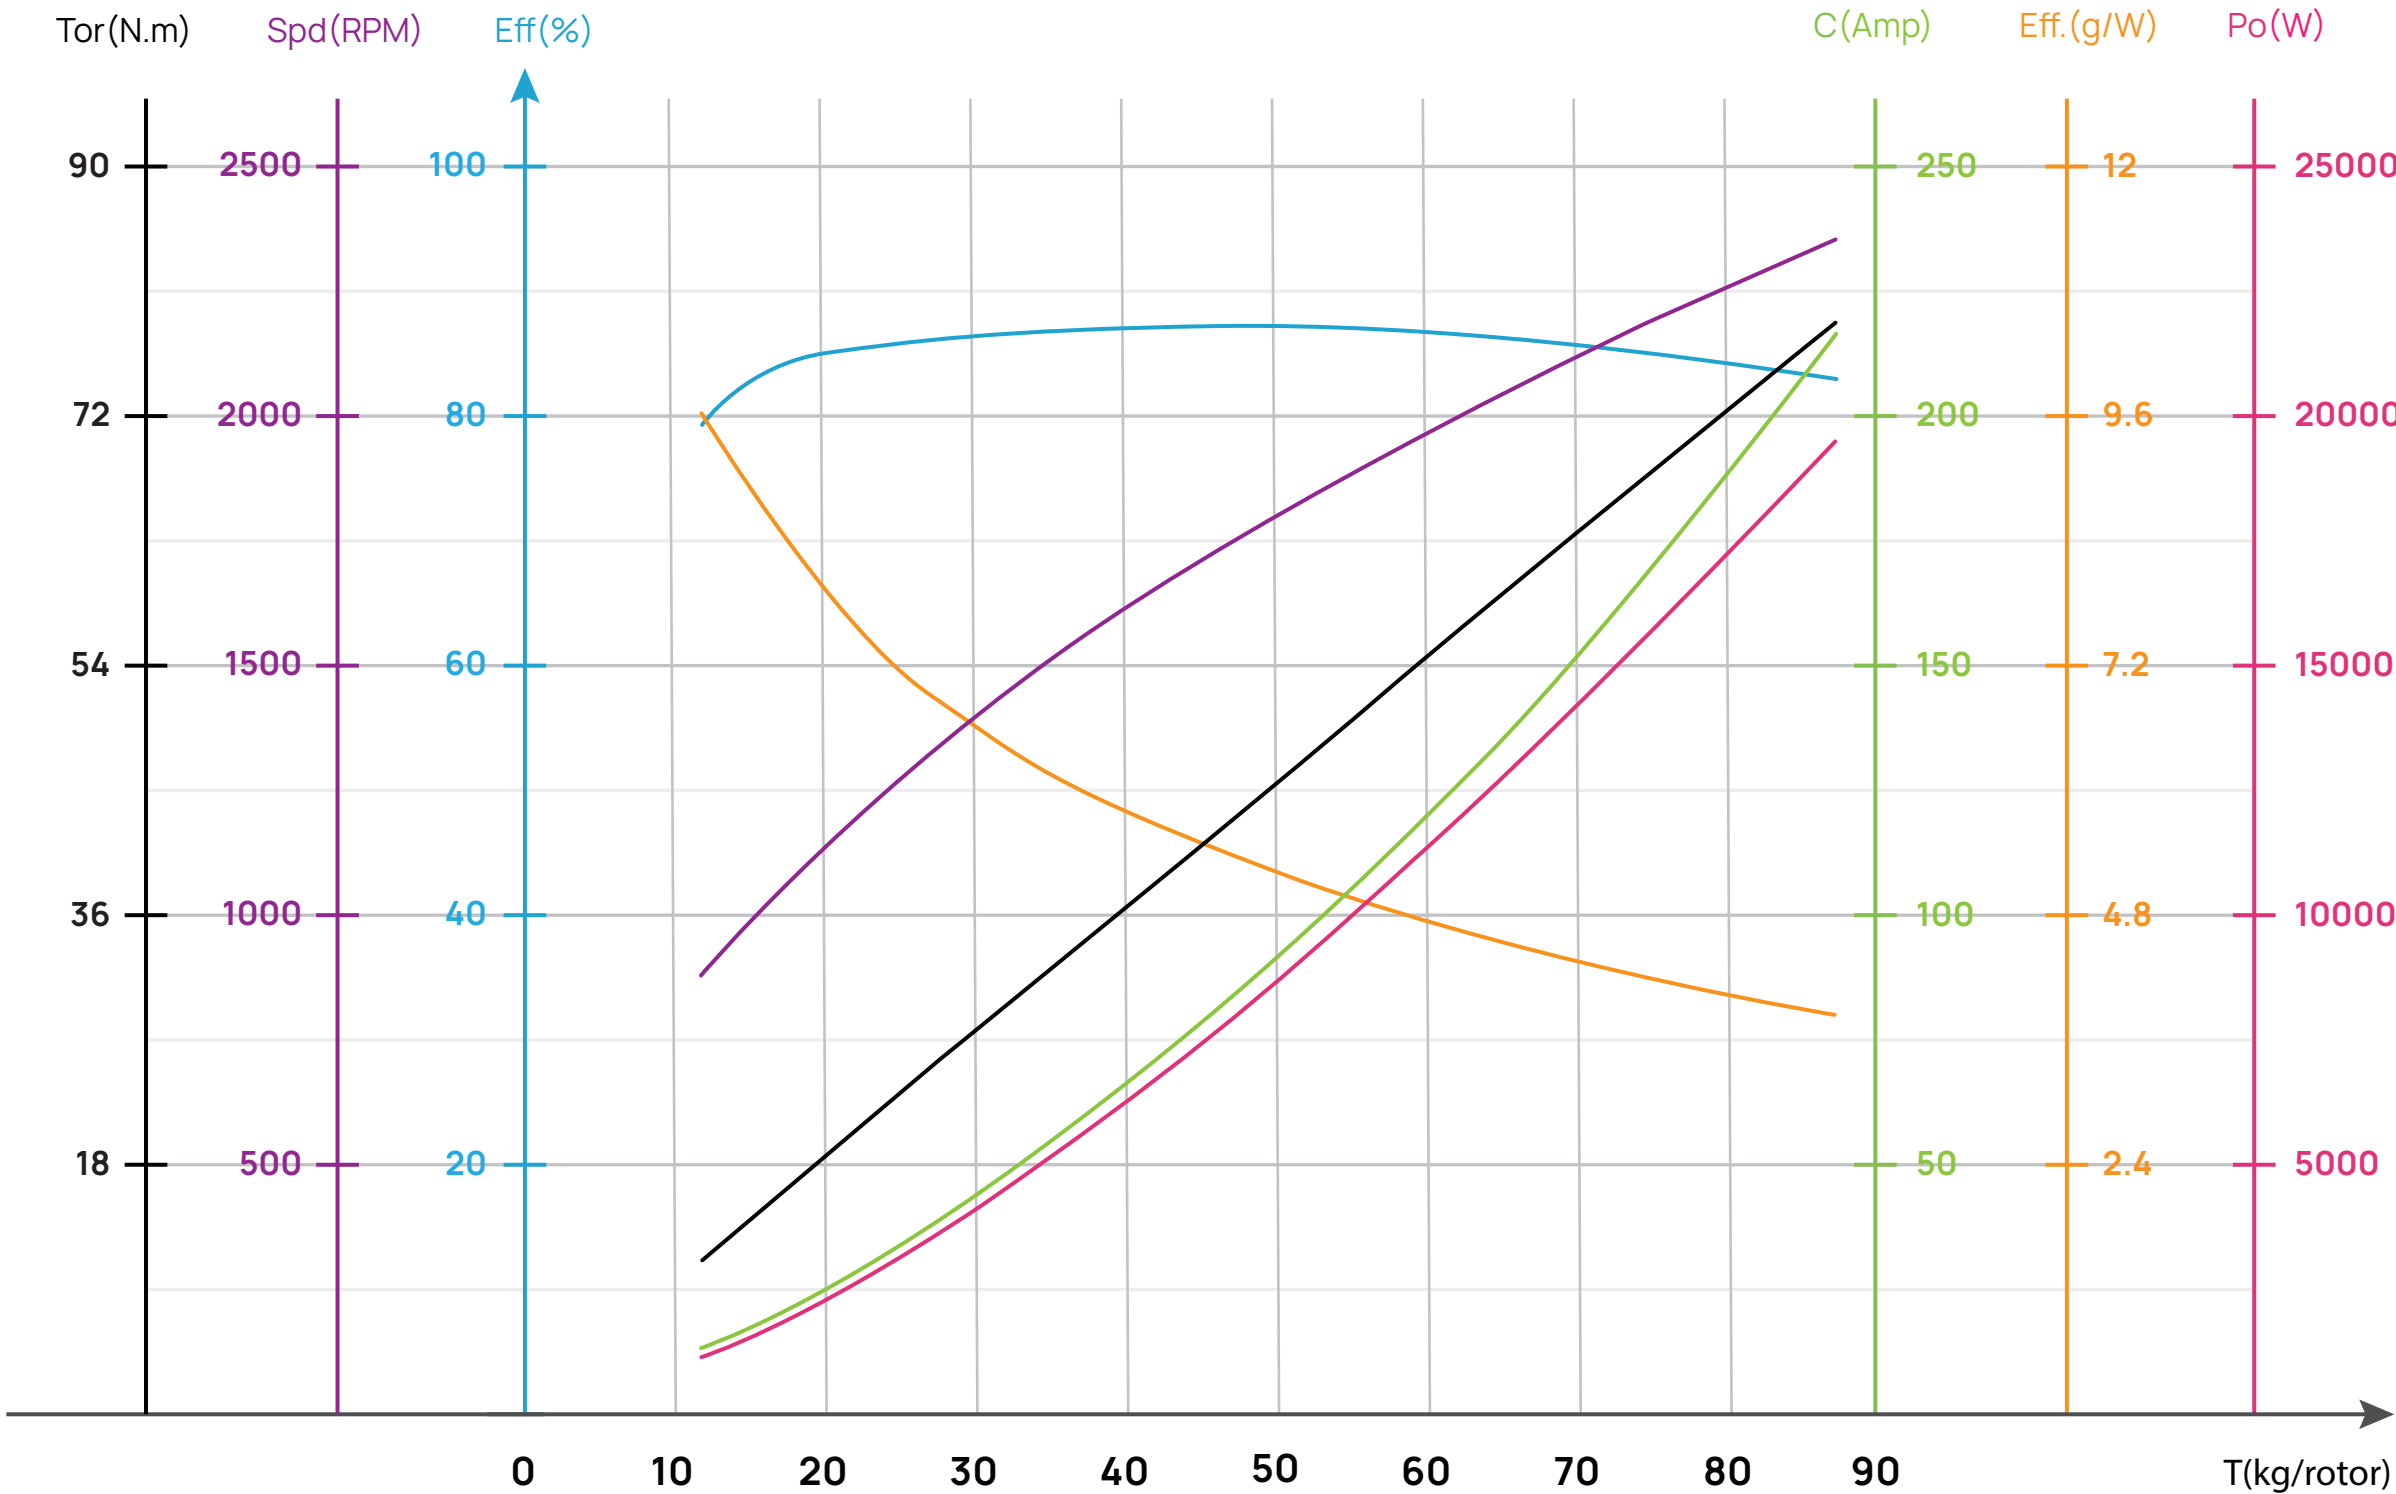


Voltage 工作电压 (V)	Propeller 螺旋桨	Throttle 油门 (%)	Thrust 拉力 (g)	Current 电流 (A)	Power Input 输入功率 (W)	Speed 转速 (RPM)	Efficiency 力效 (g/W)	Torque 扭矩 (N · m)	Power Output 输出功率 (W)	Temperature 电机温度 (°C)
108V (28S LiPo)	MSC 73x21	33%	12341	12.0	1299.5	892	9.5	11.20	1046.4	/
		38%	16673	18.0	1944.3	1035	8.6	15.09	1635.2	
		42%	20842	24.7	2672.9	1158	7.8	18.83	2283.5	
		44%	23100	28.7	3103.3	1220	7.4	20.86	2664.7	
		46%	25463	33.1	3576.6	1281	7.1	22.98	3082.0	
		48%	27928	37.9	4092.9	1342	6.8	25.18	3538.8	
		50%	30500	43.1	4653.4	1402	6.6	27.48	4034.1	
		52%	33183	48.7	5260.7	1462	6.3	29.87	4572.9	
		54%	35986	54.8	5918.2	1521	6.1	32.36	5154.5	
		56%	38917	61.4	6630.5	1580	5.9	34.97	5785.2	
		58%	41983	68.5	7403.2	1639	5.7	37.69	6468.0	
		60%	45189	76.3	8242.4	1699	5.5	40.53	7210.6	
		62%	48536	84.7	9154.7	1759	5.3	43.50	8012.2	
		64%	52020	93.9	10146.4	1820	5.1	46.60	8879.9	
		66%	55632	103.9	11222.6	1880	5.0	49.81	9805.4	
		68%	59354	114.6	12386.3	1941	4.8	53.13	10798.1	
		70%	63158	126.2	13635.9	2002	4.6	56.53	11850.0	
		72%	67009	138.5	14963.5	2062	4.5	59.97	12948.3	
		74%	70857	151.3	16352.1	2120	4.3	63.40	14075.0	
		76%	74640	164.5	17773.8	2175	4.2	66.76	15205.6	
		80%	81695	190.1	20544.9	2271	4.0	72.93	17342.7	
		100%	88928	217.2	23463.9	2360	3.8	78.97	19515.2	

H15MD Plus-108V & MSC 73x21 (共轴/Coaxial Load)

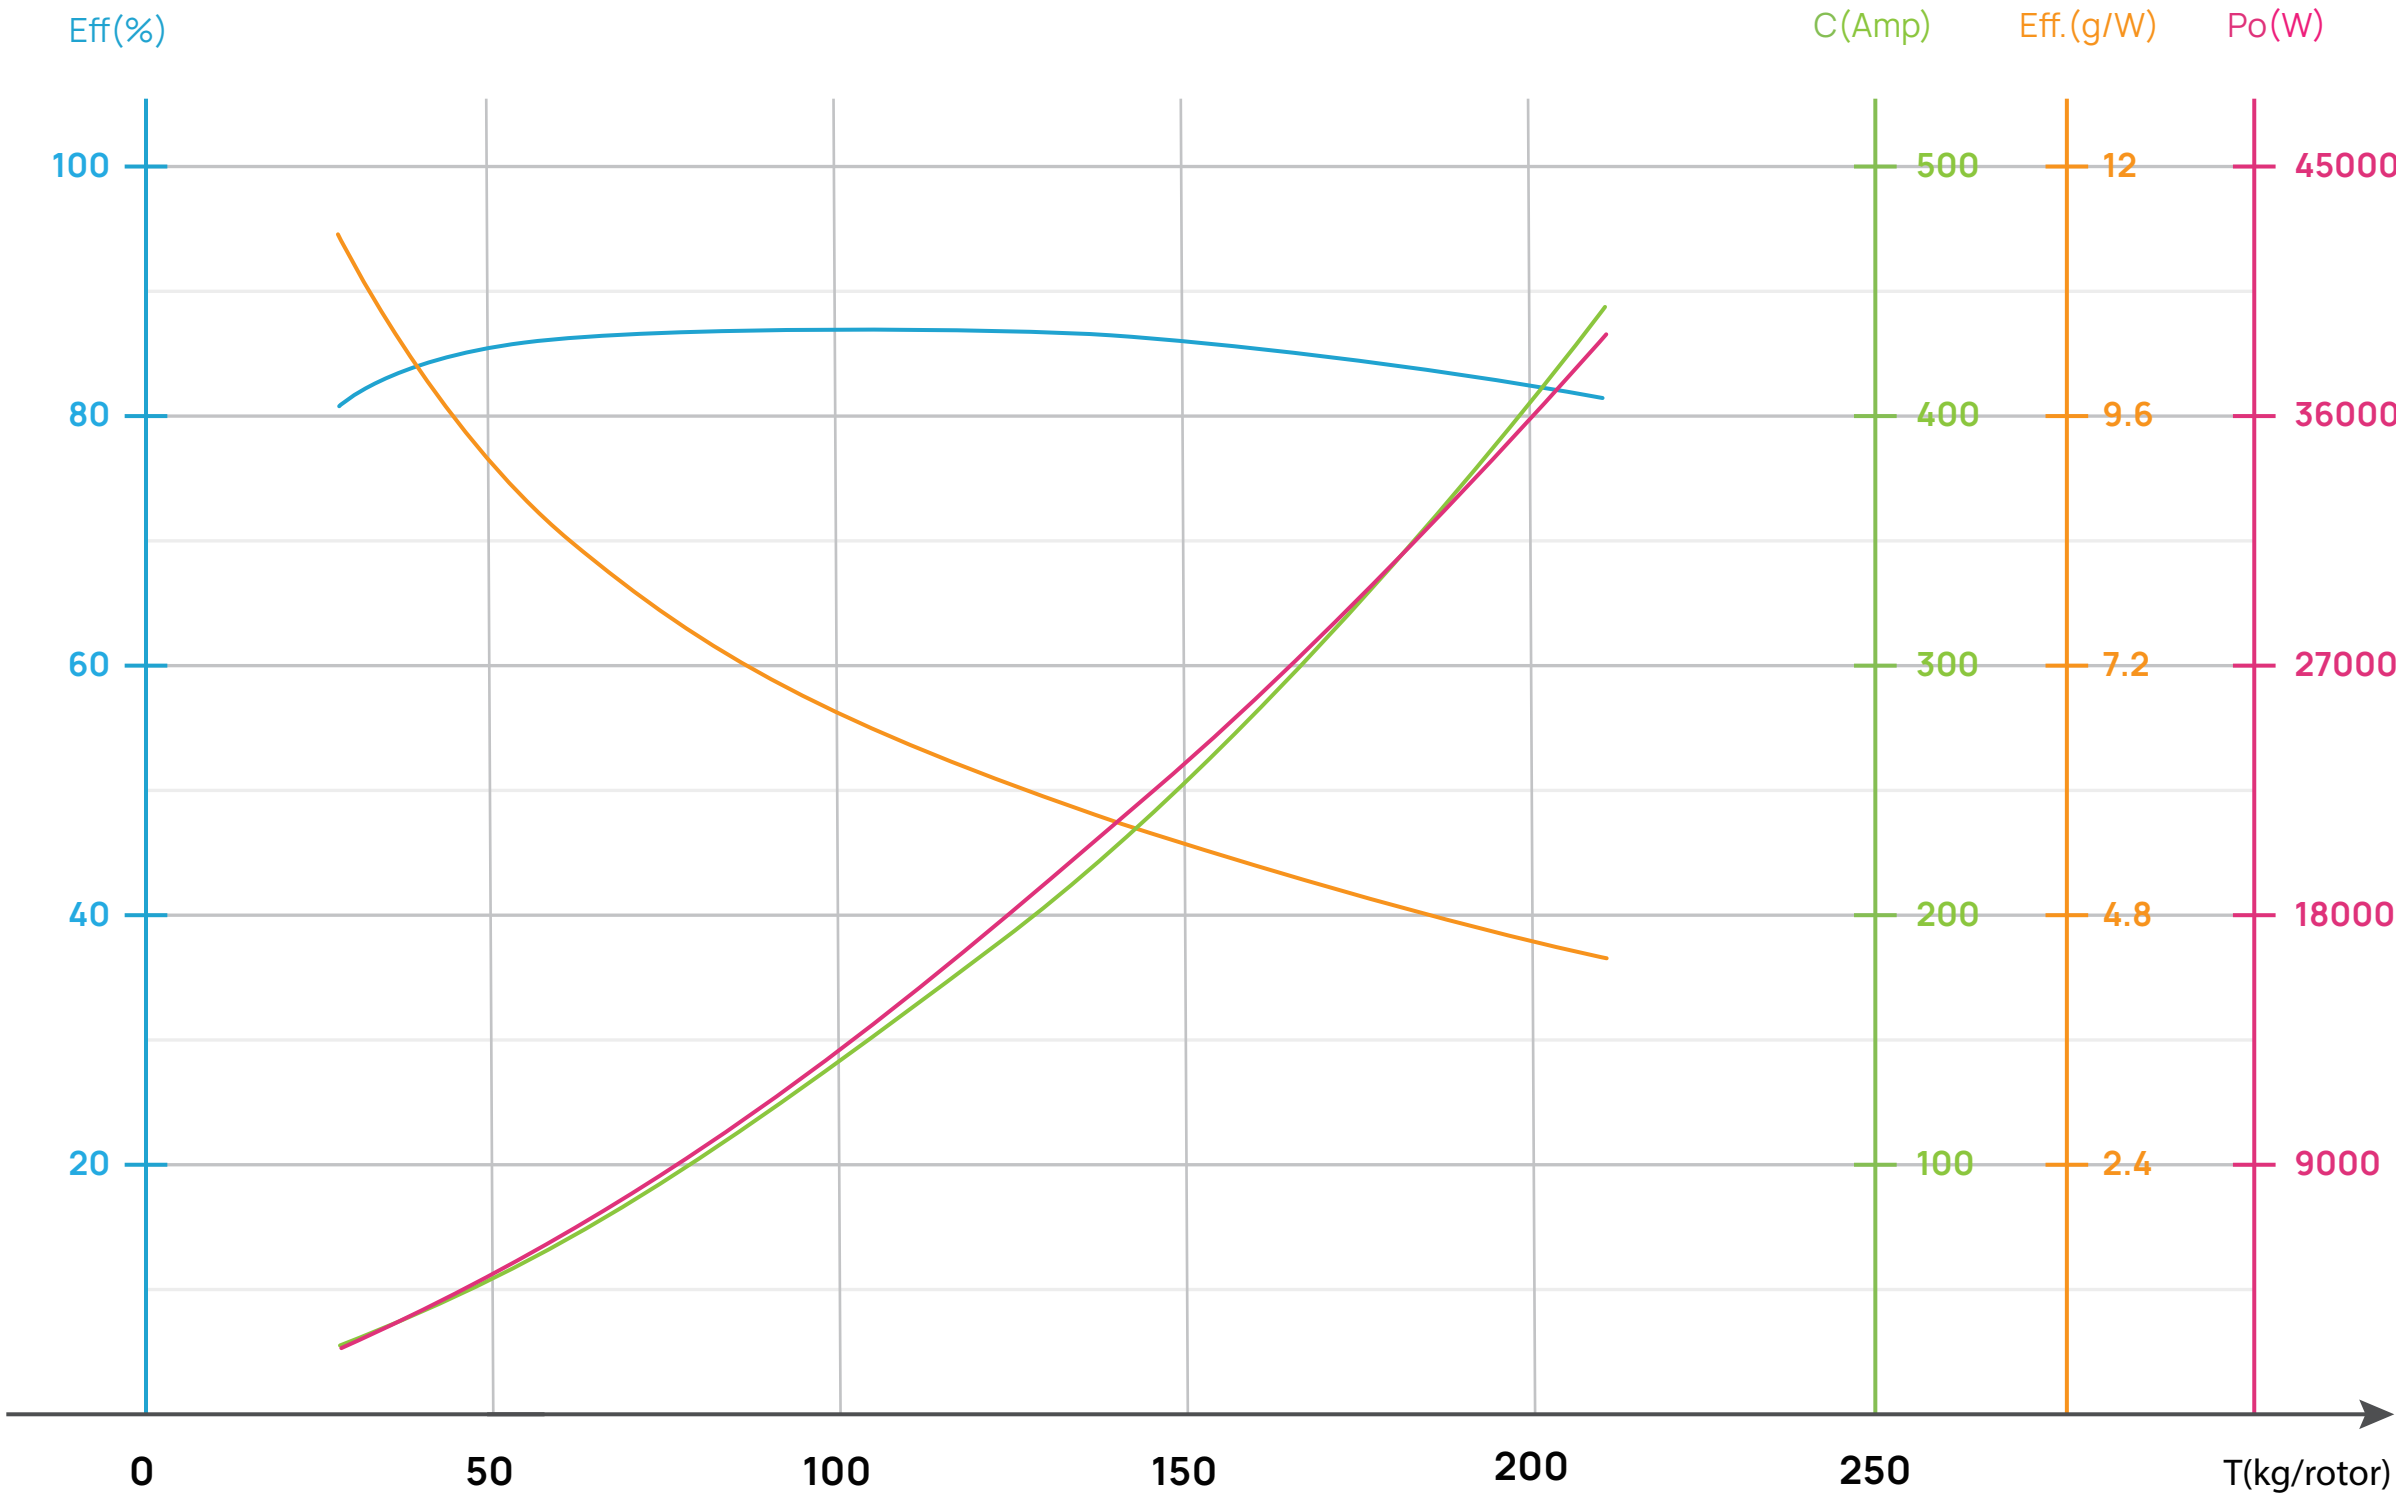


Voltage 工作电压(V)	Propeller 螺旋桨	Throttle 油门(%)	Thrust 拉力(g)	Current 电流(A)	Power Input 输入功率(W)	Efficiency 效率(%)	Efficiency 力效(g/W)	Power Output 输出功率(W)	Temperature 电机温度(℃)
108V (28S LiPo)	MSC 73x21	33%	30294	25.2	2725.5	81.26	11.1	2214.7	/
		38%	40913	38.1	4118.8	84.07	9.9	3462.7	
		42%	51279	52.5	5670.3	85.40	9.0	4842.4	
		44%	56884	60.9	6580.7	85.83	8.6	5648.2	
		46%	62727	70.2	7579.6	86.15	8.3	6529.8	
		48%	68799	80.2	8668.8	86.38	7.9	7488.1	
		50%	75106	91.2	9852.7	86.56	7.6	8528.5	
		52%	81660	103.1	11138.0	86.69	7.3	9655.5	
		54%	88484	116.0	12533.5	86.78	7.1	10876.6	
		56%	95596	130.1	14050.1	86.85	6.8	12202.5	
		58%	103017	145.3	15699.4	86.87	6.6	13638.0	
		60%	110758	161.9	17493.9	86.85	6.3	15193.4	
		62%	118818	180.0	19445.6	86.78	6.1	16874.9	
		64%	127183	199.6	21565.0	86.63	5.9	18681.7	
		66%	135818	220.8	23859.1	86.39	5.7	20611.9	
		68%	144665	243.7	26329.2	86.05	5.5	22656.3	
		70%	153639	268.1	28967.7	85.60	5.3	24796.3	
		72%	162621	293.9	31752.6	85.05	5.1	27005.6	
		74%	171458	320.6	34642.9	84.40	4.9	29238.6	
		76%	179955	347.7	37570.8	83.71	4.8	31450.5	
		80%	194927	398.9	43096.5	82.37	4.5	35498.6	
		100%	206880	442.5	47816.0	81.31	4.3	38879.2	

H15MD Plus-92V & MFC 73x23 (上轴/Upper Rotor)

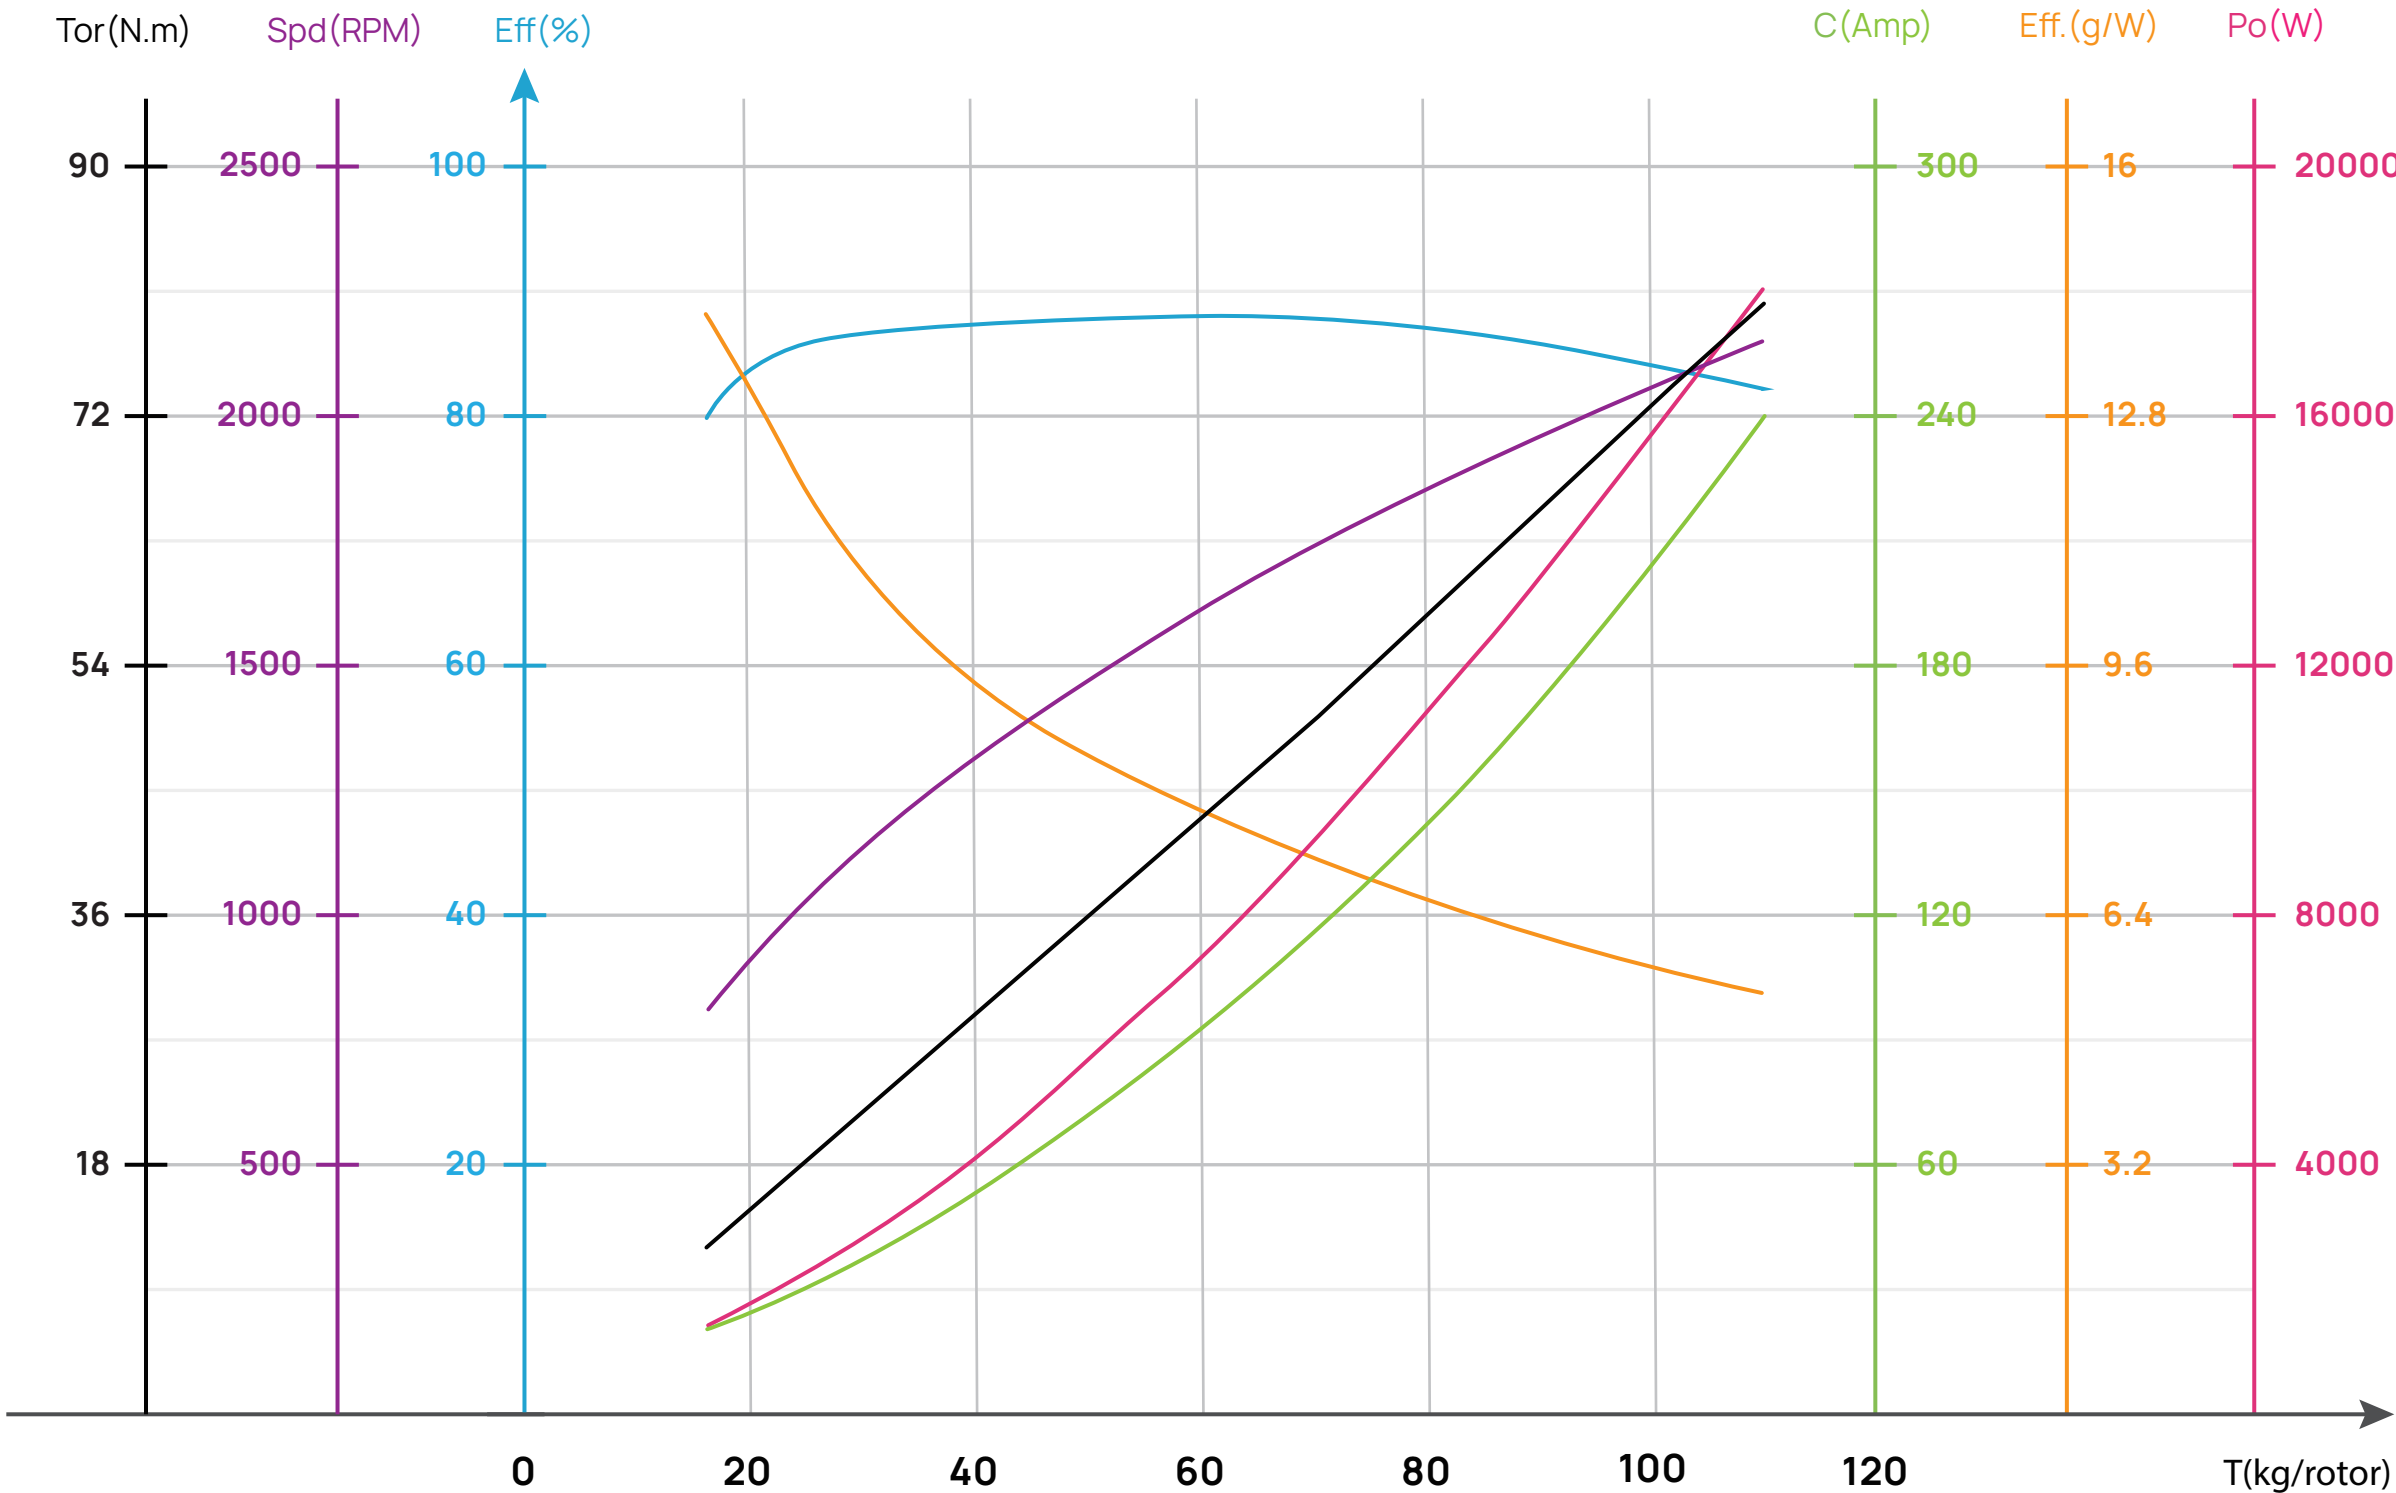


Voltage 工作电压 (V)	Propeller 螺旋桨	Throttle 油门 (%)	Thrust 拉力 (g)	Current 电流 (A)	Power Input 输入功率 (W)	Speed 转速 (RPM)	Efficiency 力效 (g/W)	Torque 扭矩 (N · m)	Power Output 输出功率 (W)	Temperature 电机温度 (°C)
92V (24S LiPo)	MFC 73x23	33%	12548	9.7	889.2	752	14.1	9.00	708.7	/
		38%	17023	14.2	1308.0	869	13.0	12.07	1098.3	
		42%	21449	19.6	1804.2	974	11.9	15.17	1547.2	
		44%	23871	22.9	2104.3	1027	11.3	16.88	1815.3	
		46%	26413	26.5	2439.3	1080	10.8	18.69	2113.6	
		48%	29070	30.5	2807.5	1132	10.4	20.58	2439.4	
		50%	31841	34.9	3209.8	1184	9.9	22.55	2795.7	
		52%	34731	39.6	3647.0	1236	9.5	24.62	3186.4	
		54%	37746	44.8	4121.1	1287	9.2	26.76	3606.3	
		56%	40893	50.3	4633.8	1338	8.8	29.01	4064.4	
		58%	44183	56.4	5189.8	1390	8.5	31.35	4563.0	
		60%	47623	62.9	5791.8	1441	8.2	33.79	5098.6	
		62%	51220	70.0	6445.3	1492	7.9	36.35	5679.0	
		64%	54978	77.7	7155.0	1544	7.7	39.03	6310.2	
		66%	58897	86.1	7926.4	1596	7.4	41.83	6990.6	
		68%	62972	95.2	8765.0	1648	7.2	44.77	7725.8	
		70%	67191	105.1	9676.3	1701	6.9	47.83	8519.2	
		72%	71535	115.9	10664.0	1753	6.7	51.01	9363.4	
		74%	80482	139.8	12870.4	1856	6.3	57.67	11207.9	
		76%	89473	166.6	15338.3	1952	5.8	64.49	13181.6	
		80%	99945	201.2	18520.5	2055	5.4	72.47	15594.3	
		100%	110639	239.4	22033.1	2151	5.0	80.29	18084.2	

H15MD Plus-92V & MFC 73x23 (下轴/Lower Rotor)

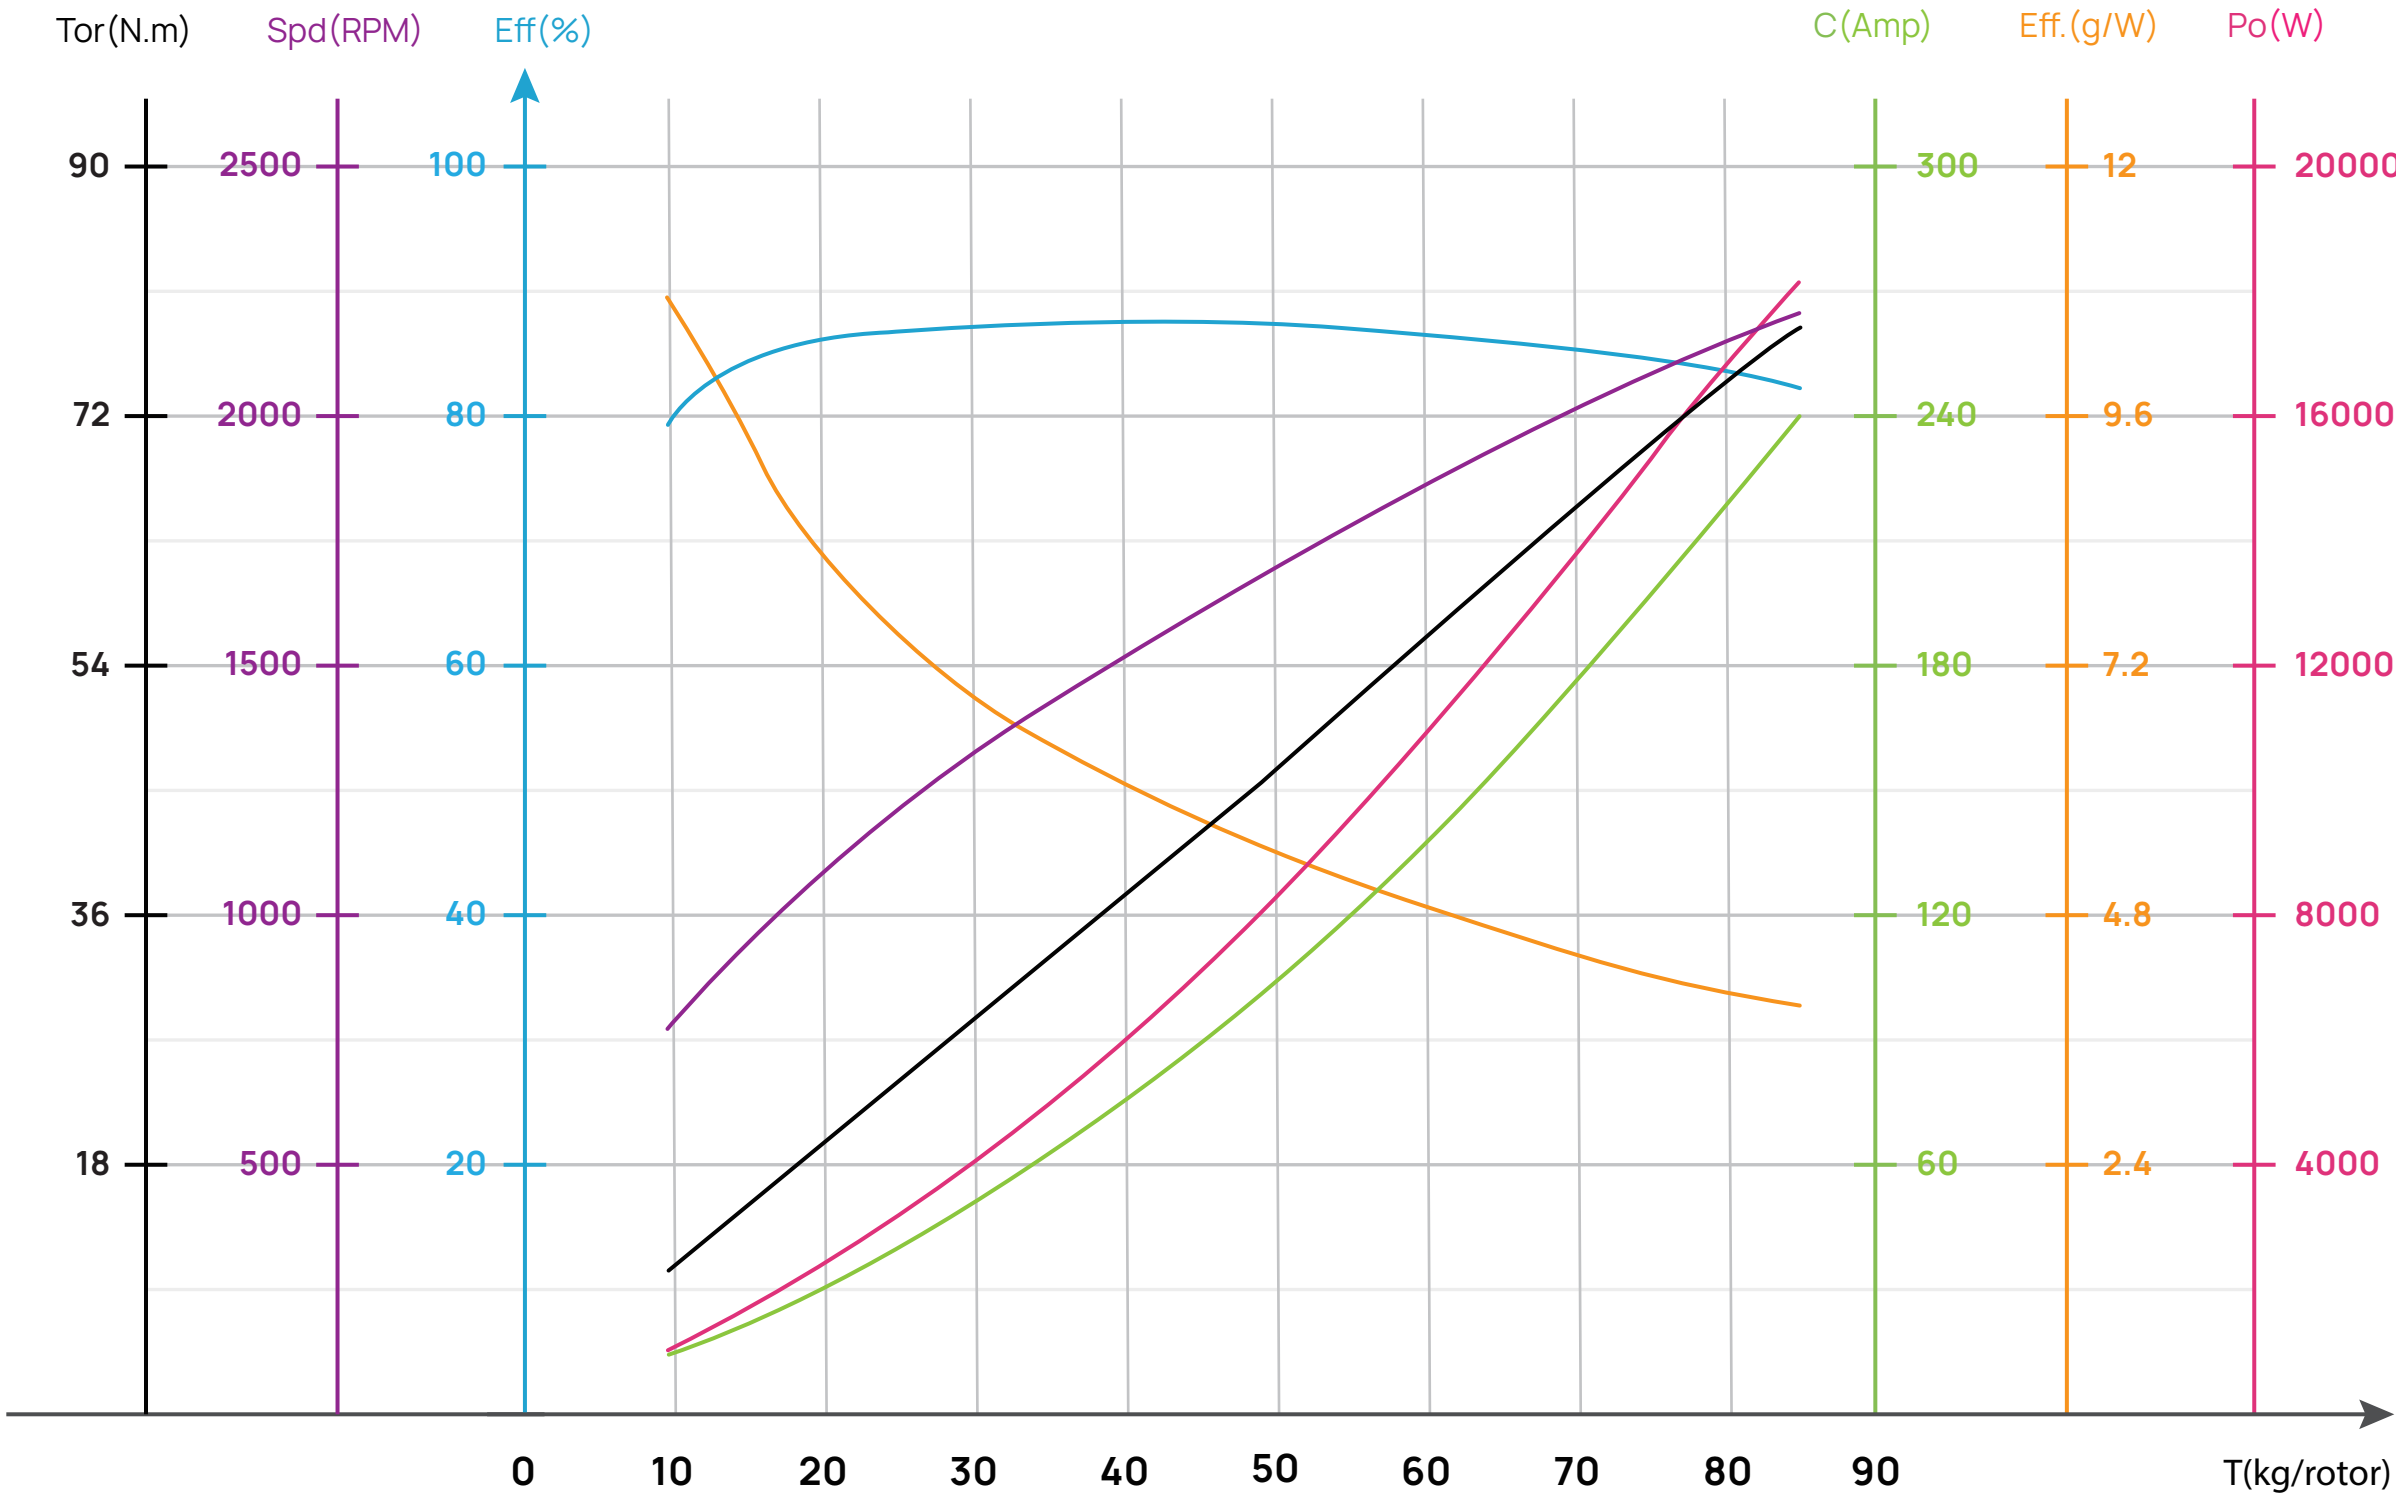


Voltage 工作电压(V)	Propeller 螺旋桨	Throttle 油门(%)	Thrust 拉力(g)	Current 电流(A)	Power Input 输入功率(W)	Speed 转速(RPM)	Efficiency 力效(g/W)	Torque 扭矩(N·m)	Power Output 输出功率(W)	Temperature 电机温度(℃)
92V (24S LiPo)	MFC 73x23	33%	9631	9.7	895.6	746	10.8	9.08	709.3	/
		38%	13037	14.4	1320.9	866	9.9	12.15	1101.8	
		42%	16248	19.5	1798.7	968	9.0	15.11	1531.6	
		44%	18016	22.7	2088.6	1020	8.6	16.75	1789.0	
		46%	19893	26.2	2413.6	1073	8.2	18.50	2078.6	
		48%	21878	30.1	2774.4	1125	7.9	20.36	2398.4	
		50%	23970	34.5	3172.0	1178	7.6	22.31	2752.0	
		52%	26168	39.2	3607.4	1230	7.3	24.36	3137.5	
		54%	28471	44.3	4079.7	1283	7.0	26.49	3558.8	
		56%	30875	49.9	4592.4	1335	6.7	28.72	4014.8	
		58%	33379	55.9	5144.7	1387	6.5	31.02	4505.2	
		60%	35978	62.4	5740.2	1439	6.3	33.40	5032.7	
		62%	38667	69.3	6381.8	1490	6.1	35.86	5594.9	
		64%	41442	76.8	7071.3	1542	5.9	38.41	6201.9	
		66%	44296	84.9	7813.2	1594	5.7	41.03	6848.4	
		68%	47221	93.6	8611.3	1646	5.5	43.75	7540.6	
		70%	50209	102.9	9469.2	1699	5.3	46.54	8279.7	
		72%	53250	112.9	10388.8	1751	5.1	49.43	9063.0	
		74%	59448	134.9	12420.3	1856	4.8	55.42	10770.6	
		76%	65709	159.6	14686.6	1959	4.5	61.61	12638.1	
		80%	73429	192.6	17729.8	2076	4.1	69.20	15042.8	
		100%	84130	240.0	22090.2	2211	3.8	78.54	18183.4	

H15MD Plus-92V & MFC 73x23 (共轴/Coaxial Load)

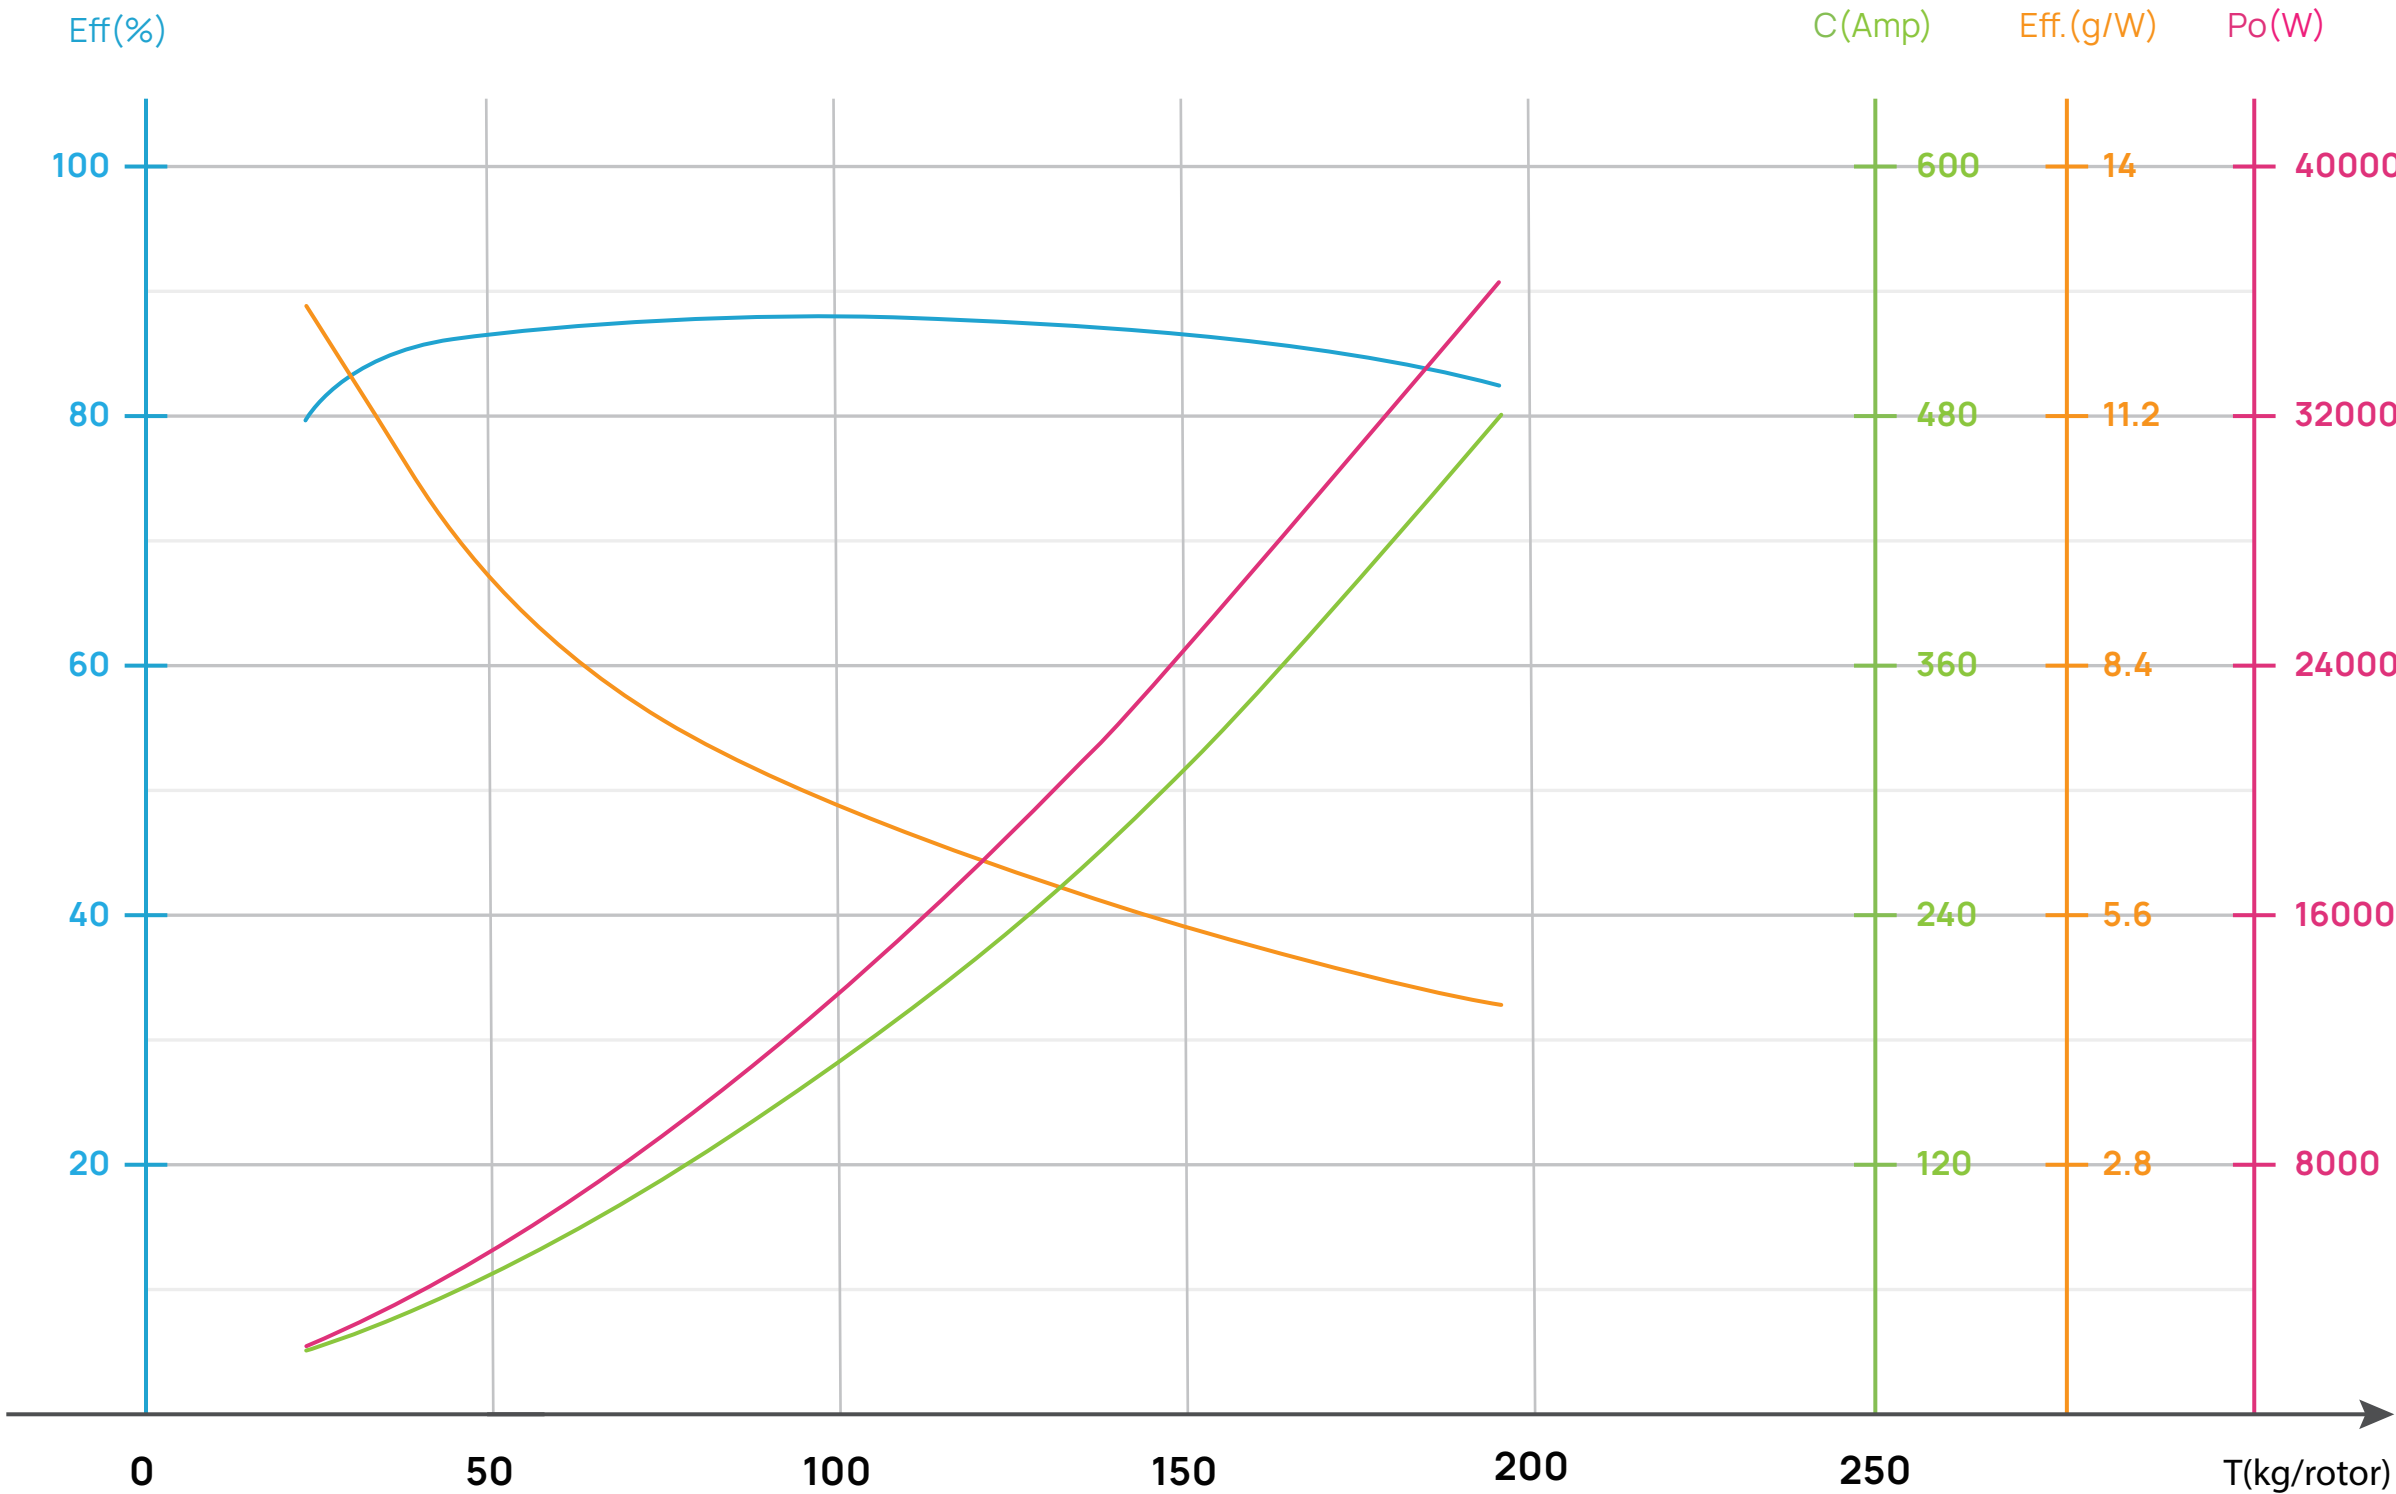


Voltage 工作电压(V)	Propeller 螺旋桨	Throttle 油门(%)	Thrust 拉力(g)	Current 电流(A)	Power Input 输入功率(W)	Efficiency 效率(%)	Efficiency 力效(g/W)	Power Output 输出功率(W)	Temperature 电机温度(℃)
92V (24S LiPo)	MFC 73x23	33%	22179	19.4	1785.8	79.41	12.4	1418.1	/
		38%	30060	28.6	2628.0	83.72	11.4	2200.2	
		42%	37697	39.1	3602.8	85.44	10.5	3078.3	
		44%	41887	45.6	4193.8	85.98	10.0	3605.8	
		46%	46306	52.7	4852.9	86.38	9.5	4191.9	
		48%	50947	60.6	5581.9	86.70	9.1	4839.5	
		50%	55811	69.3	6381.8	86.97	8.7	5550.3	
		52%	60899	78.8	7253.5	87.20	8.4	6325.1	
		54%	66216	89.1	8200.7	87.40	8.1	7167.4	
		56%	71769	100.2	9226.2	87.57	7.8	8079.4	
		58%	77562	112.3	10335.4	87.72	7.5	9066.2	
		60%	83601	125.3	11532.9	87.84	7.2	10130.5	
		62%	89888	139.4	12827.2	87.93	7.0	11278.9	
		64%	96420	154.6	14226.3	87.97	6.8	12514.9	
		66%	103193	171.0	15739.6	87.95	6.6	13843.0	
		68%	110193	188.8	17376.3	87.88	6.3	15270.3	
		70%	117400	208.0	19144.6	87.75	6.1	16799.4	
		72%	124785	228.7	21052.8	87.54	5.9	18429.6	
		76%	139930	274.8	25290.7	86.91	5.5	21980.2	
		80%	155182	326.2	30024.9	85.99	5.2	25818.4	
		85%	173373	393.8	36250.2	84.54	4.8	30645.9	
		100%	194769	479.3	44122.3	82.23	4.4	36281.8	

H15MD Plus-108V & MFC 73x23 (上轴/Upper Rotor)

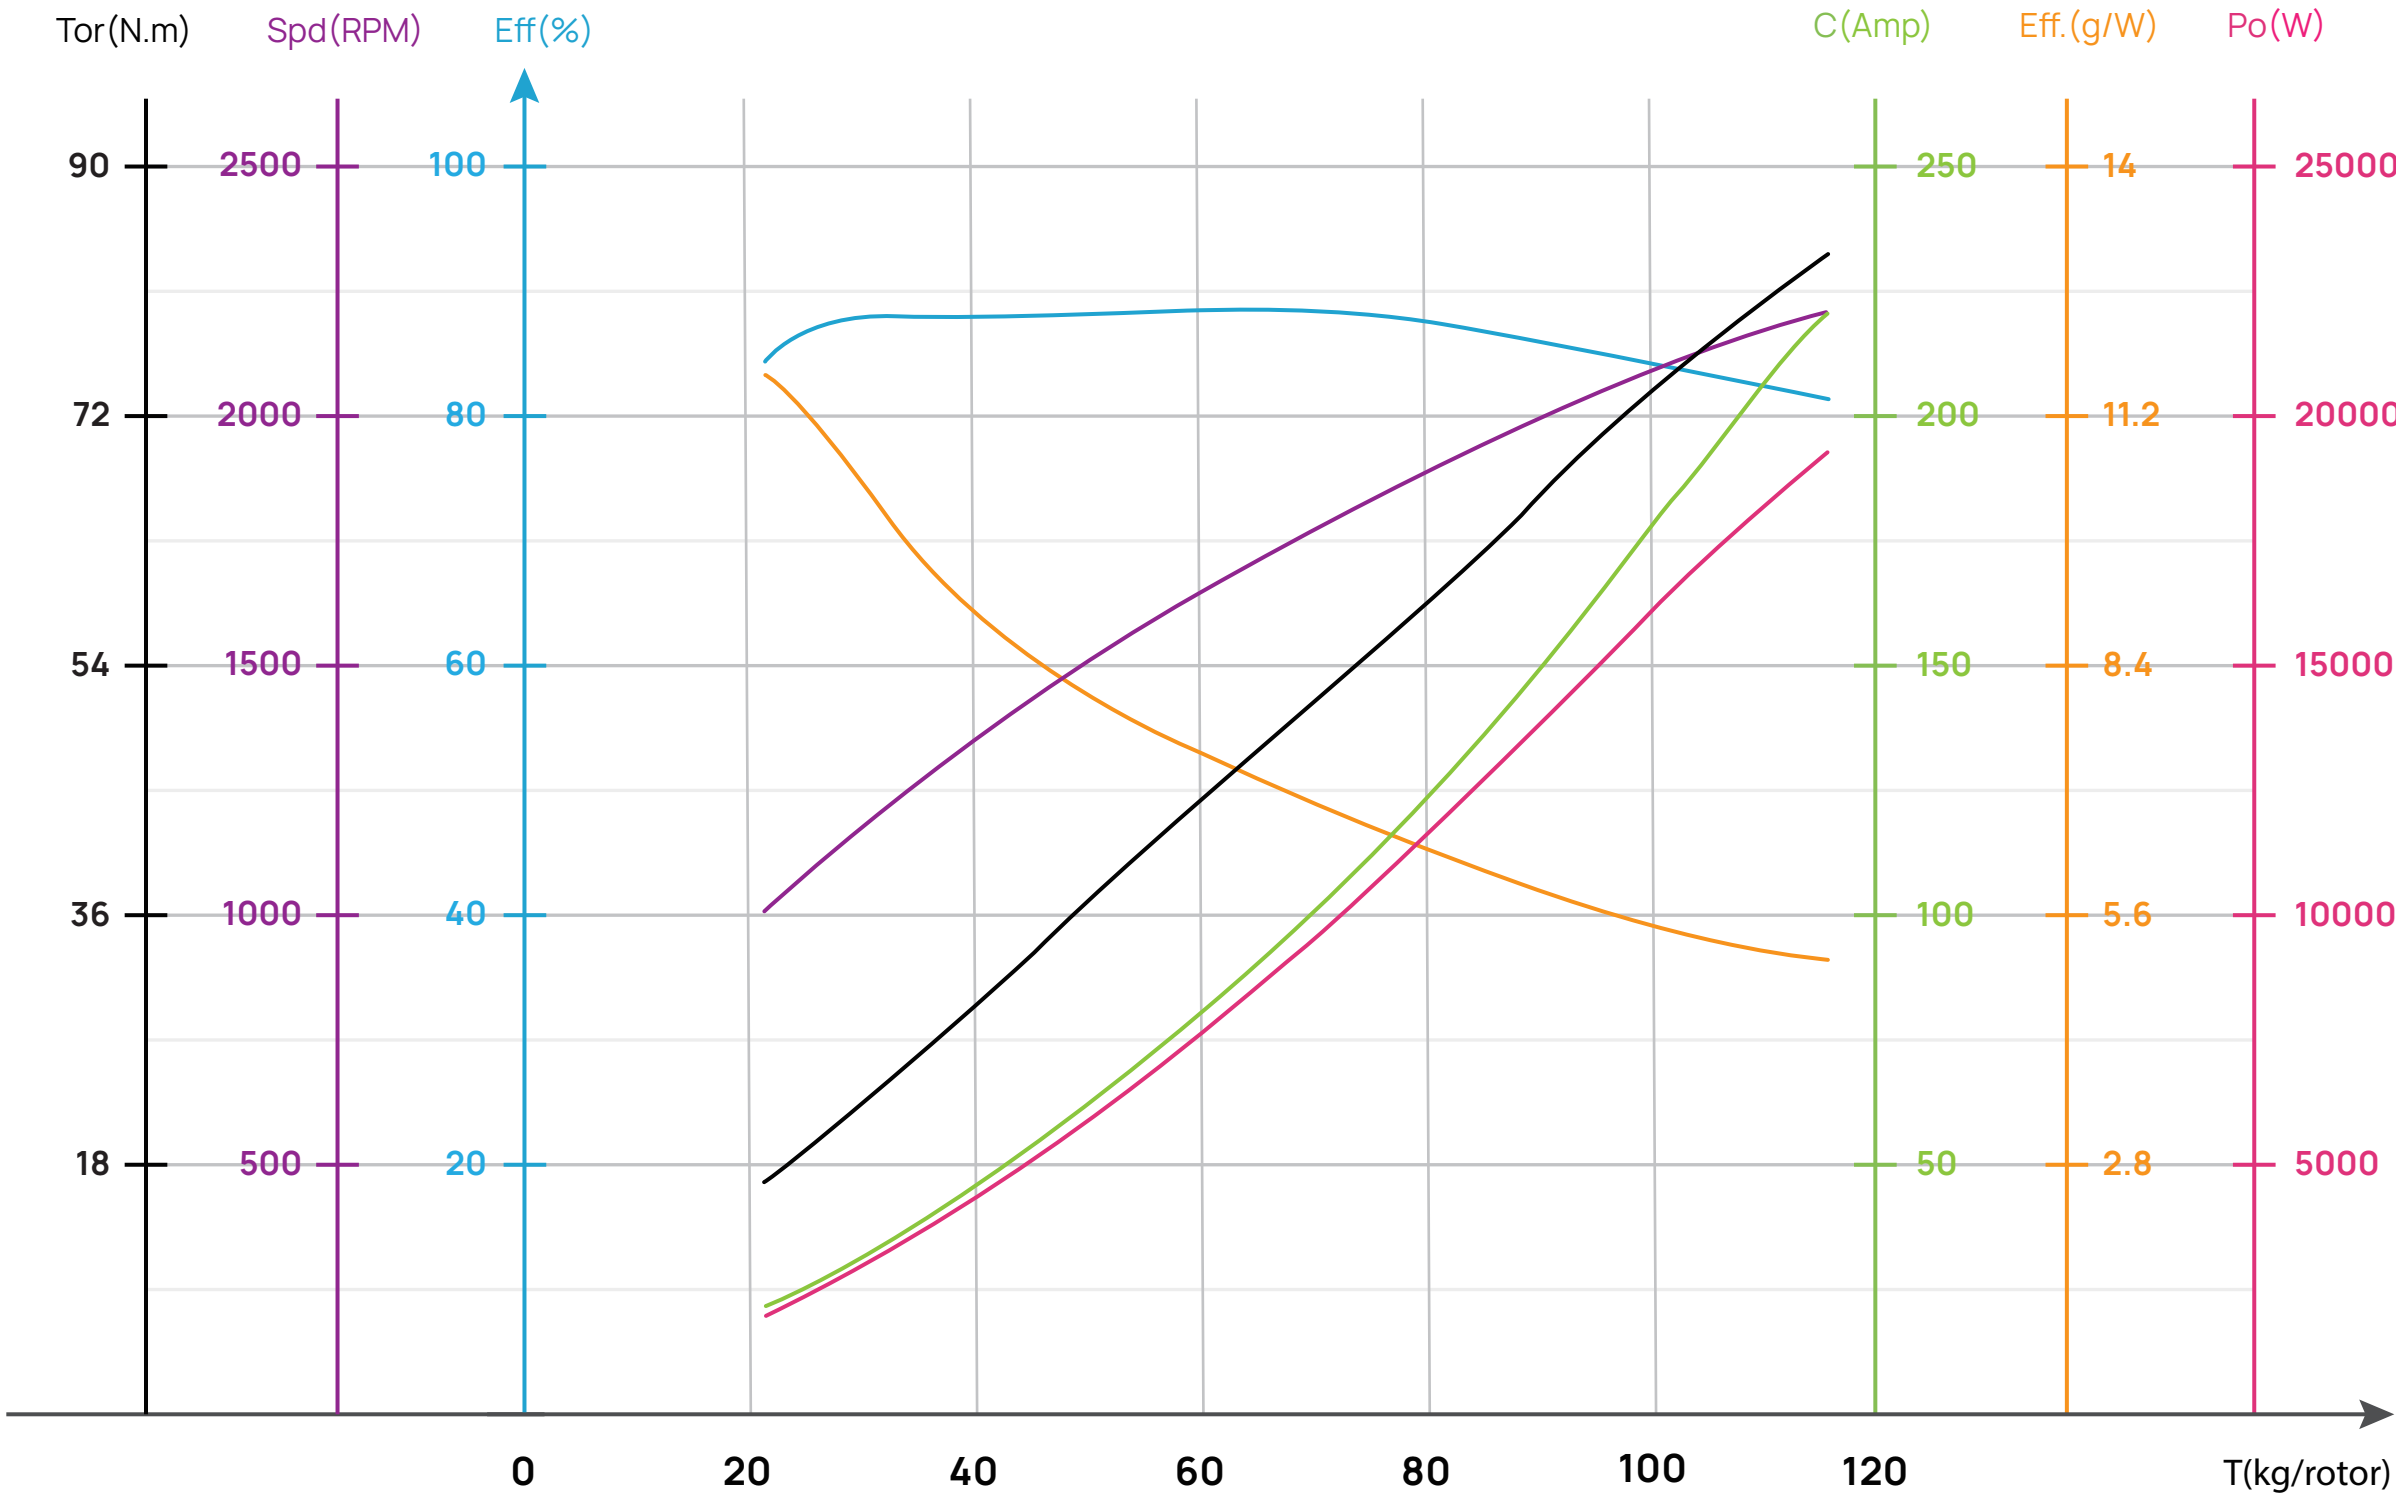


Voltage 工作电压 (V)	Propeller 螺旋桨	Throttle 油门 (%)	Thrust 拉力 (g)	Current 电流 (A)	Power Input 输入功率 (W)	Speed 转速 (RPM)	Efficiency 力效 (g/W)	Torque 扭矩 (N · m)	Power Output 输出功率 (W)	Temperature 电机温度 (℃)
108V (28S LiPo)	MFC 73x23	33%	22941	18.6	2011.5	1006	11.4	16.23	1709.7	/
		38%	30386	27.5	2968.7	1155	10.2	21.39	2587.0	
		42%	36707	36.6	3952.8	1269	9.3	25.94	3446.9	
		44%	40109	41.9	4524.3	1326	8.9	28.41	3944.7	
		46%	43709	47.7	5153.0	1384	8.5	31.02	4495.5	
		48%	47525	54.1	5841.2	1442	8.1	33.79	5102.1	
		50%	51562	61.0	6594.2	1501	7.8	36.71	5769.8	
		52%	55819	68.7	7417.3	1561	7.5	39.78	6502.3	
		54%	60283	77.0	8317.2	1621	7.2	43.00	7298.7	
		56%	64934	86.1	9301.4	1682	7.0	46.37	8166.9	
		58%	69742	96.1	10379.5	1741	6.7	49.88	9093.3	
		60%	74666	107.0	11556.0	1801	6.5	53.52	10093.1	
		62%	79658	118.8	12834.0	1858	6.2	57.26	11140.2	
		64%	84660	131.5	14201.6	1914	6.0	61.06	12237.6	
		66%	89604	144.8	15638.8	1967	5.7	64.85	13357.1	
		68%	94415	158.3	17102.7	2015	5.5	68.54	14461.6	
		70%	99008	171.6	18542.9	2059	5.3	72.01	15525.5	
		72%	103288	184.2	19896.6	2097	5.2	75.13	16497.1	
		74%	107151	195.3	21103.5	2129	5.1	77.80	17344.1	
		76%	110485	204.6	22108.2	2154	5.0	79.94	18030.4	
		80%	115074	216.5	23393.9	2185	4.9	82.53	18882.5	
		100%	116162	219.1	23674.8	2191	4.9	83.07	19058.3	

H15MD Plus-108V & MFC 73x23 (下轴/Lower Rotor)

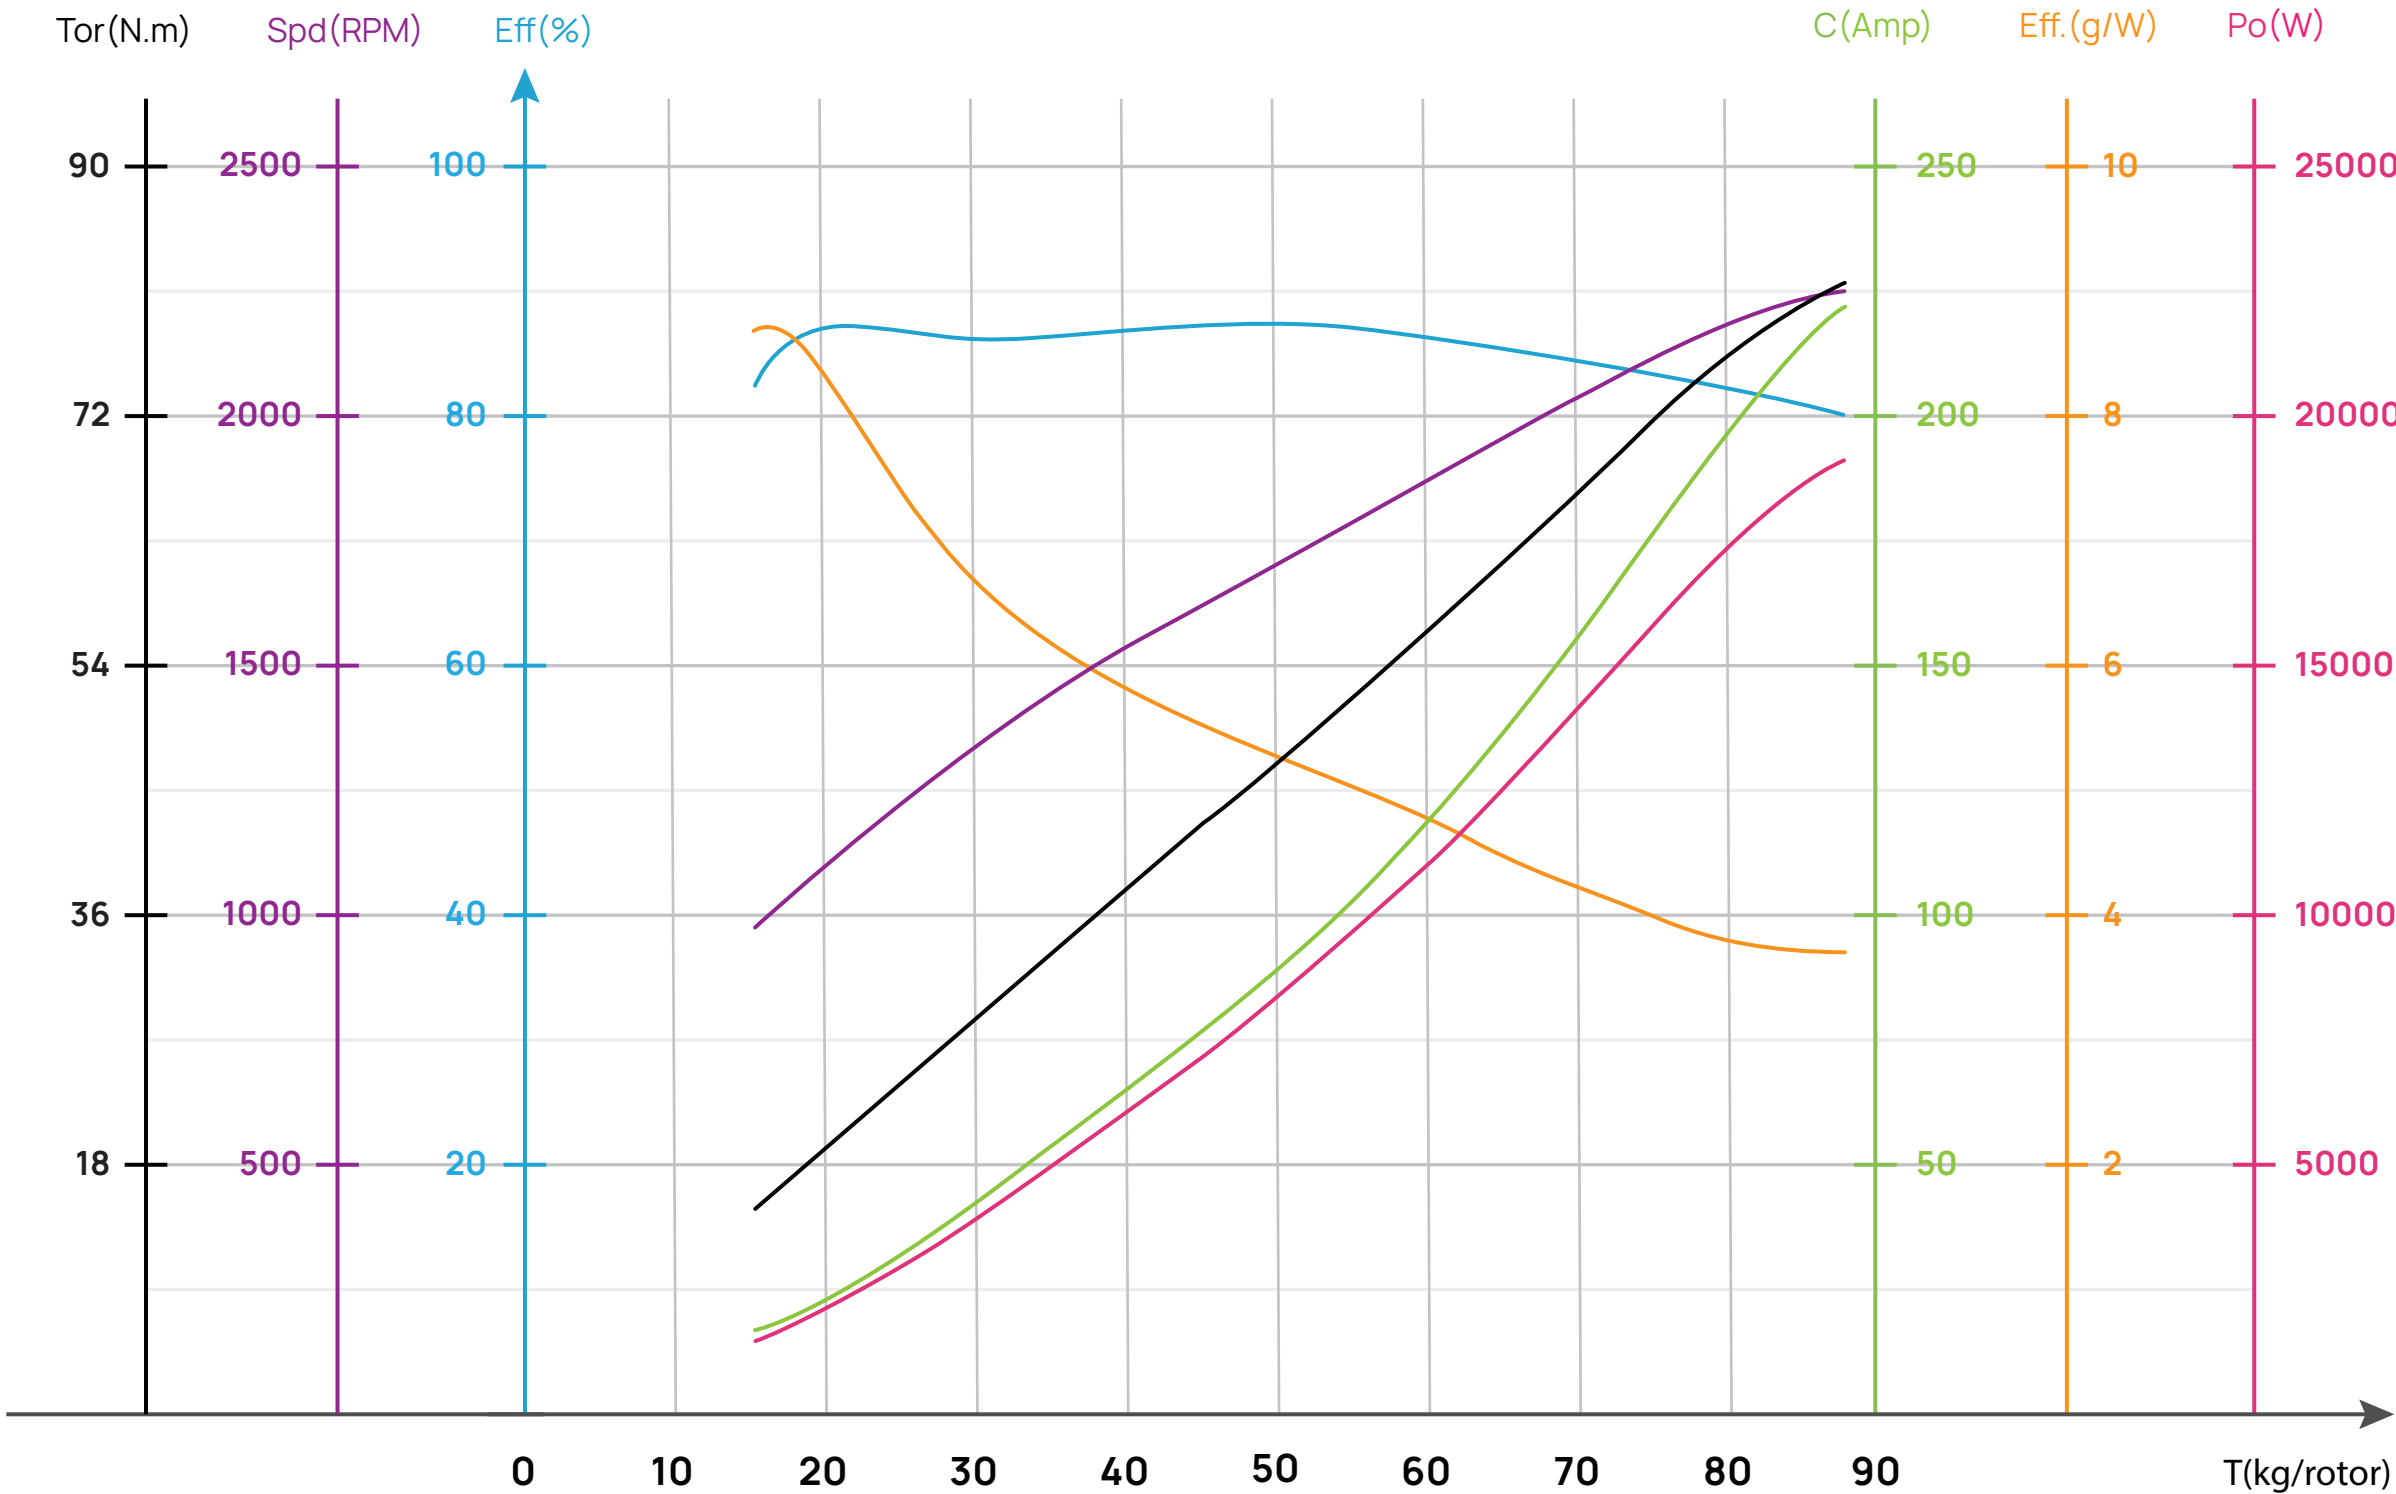

Voltage 工作电压 (V)	Propeller 螺旋桨	Throttle 油门 (%)	Thrust 拉力 (g)	Current 电流 (A)	Power Input 输入功率 (W)	Speed 转速 (RPM)	Efficiency 力效 (g/W)	Torque 扭矩 (N · m)	Power Output 输出功率 (W)	Temperature 电机温度 (°C)
108V (28S LiPo)	MFC 73x23	33%	17199	18.3	1981.3	1003	8.7	15.84	1663.6	/
		38%	22783	26.6	2875.8	1148	7.9	20.76	2495.5	
		42%	27831	36.5	3945.3	1269	7.1	25.56	3396.4	
		44%	30539	42.3	4566.4	1329	6.7	28.17	3920.2	
		46%	33369	48.4	5231.9	1389	6.4	30.88	4491.3	
		48%	36320	55.0	5936.2	1448	6.1	33.68	5106.7	
		50%	39390	61.8	6677.3	1506	5.9	36.54	5762.2	
		52%	42577	69.1	7460.6	1564	5.7	39.47	6464.0	
		54%	45874	76.8	8295.6	1621	5.5	42.48	7210.5	
		56%	49273	85.1	9197.7	1678	5.4	45.57	8007.0	
		58%	52763	94.3	10184.0	1735	5.2	48.76	8858.5	
		60%	56324	104.4	11275.1	1793	5.0	52.07	9776.1	
		62%	59936	115.6	12483.9	1852	4.8	55.50	10762.9	
		64%	63568	127.9	13813.8	1912	4.6	59.05	11822.4	
		66%	67186	141.2	15252.0	1972	4.4	62.67	12940.9	
		68%	70744	155.1	16761.3	2030	4.2	66.27	14086.7	
		70%	74190	169.2	18283.6	2085	4.1	69.74	15226.0	
		72%	77462	182.7	19743.2	2134	3.9	72.93	16296.6	
		74%	80488	194.9	21055.9	2175	3.8	75.70	17240.6	
		76%	83184	205.0	22149.3	2205	3.8	77.92	17991.0	
		80%	87193	217.7	23523.5	2236	3.7	80.56	18862.0	
		100%	88531	221.1	23884.4	2241	3.7	81.21	19056.7	

H15MD Plus-108V & MFC 73x23 (共轴/Coaxial Load)

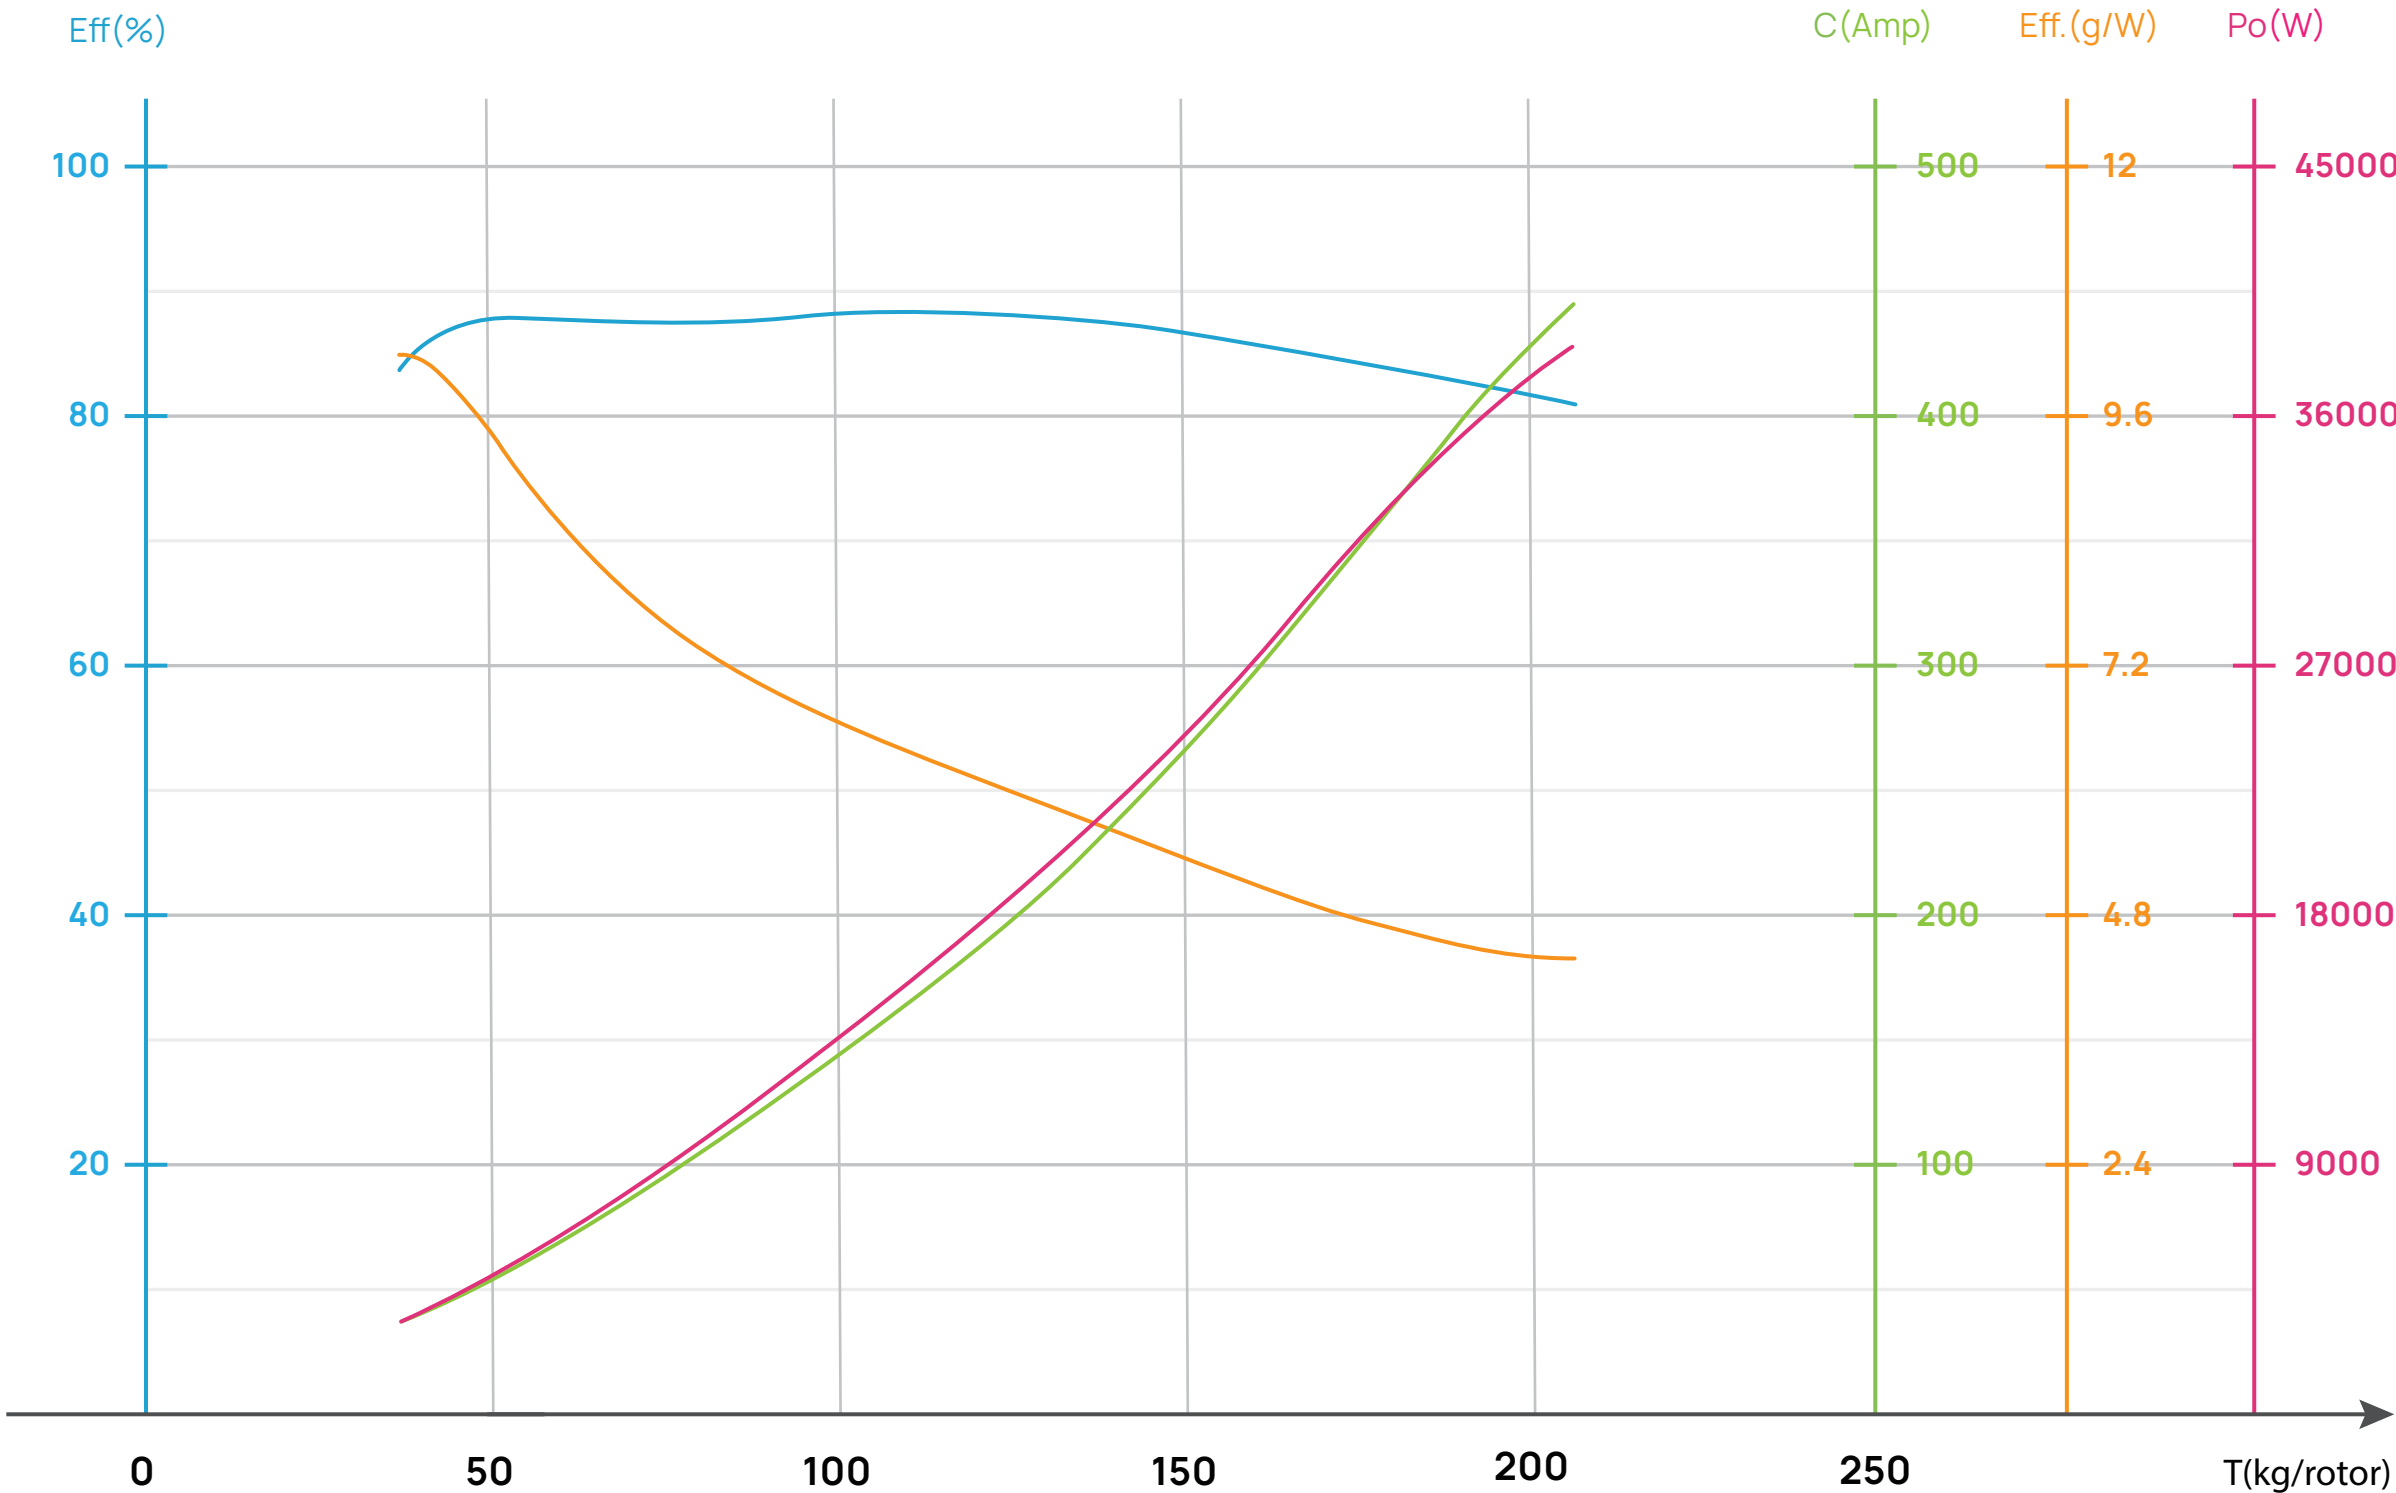

Voltage 工作电压(V)	Propeller 螺旋桨	Throttle 油门(%)	Thrust 拉力(g)	Current 电流(A)	Power Input 输入功率(W)	Efficiency 效率(%)	Efficiency 力效(g/W)	Power Output 输出功率(W)	Temperature 电机温度(℃)
108V (28S LiPo)	MFC 73x23	33%	40140	37.0	3992.8	84.49	10.1	3373.5	/
		38%	53169	54.1	5844.4	86.97	9.1	5082.9	
		42%	64538	73.1	7898.1	86.64	8.2	6842.9	
		44%	70648	84.2	9090.7	86.53	7.8	7866.2	
		46%	77079	96.1	10383.8	86.55	7.4	8987.2	
		48%	83845	109.0	11777.4	86.69	7.1	10209.9	
		50%	90952	122.9	13272.6	86.92	6.9	11536.5	
		52%	98396	137.7	14877.9	87.16	6.6	12967.6	
		54%	106157	153.8	16612.9	87.34	6.4	14509.7	
		56%	114208	171.2	18499.1	87.41	6.2	16170.0	
		58%	122504	190.4	20563.5	87.31	6.0	17954.0	
		60%	130990	211.4	22832.1	87.02	5.7	19868.5	
		62%	139594	234.4	25317.9	86.53	5.5	21907.6	
		64%	148228	259.3	28015.4	85.89	5.3	24062.4	
		66%	156790	285.9	30890.8	85.14	5.1	26300.4	
		68%	165159	313.4	33864.1	84.33	4.9	28557.6	
		70%	173198	340.9	36826.5	83.52	4.7	30757.5	
		72%	180750	366.9	39639.9	82.75	4.6	32802.0	
		76%	187639	390.2	42159.4	82.03	4.5	34583.3	
		80%	193669	409.6	44257.5	81.40	4.4	36025.6	
		85%	202267	434.3	46917.5	80.45	4.3	37745.1	
		100%	204693	440.2	47559.2	80.16	4.3	38123.5	