


M7 Six-Pin Waterproof Male Connector
 Exposed Length: 155mm±5mm
 (Waterproof Male Connector Includes Header)

C B A Motor Cable: 14AWG, Black
 Exposed Length: 85mm±5mm

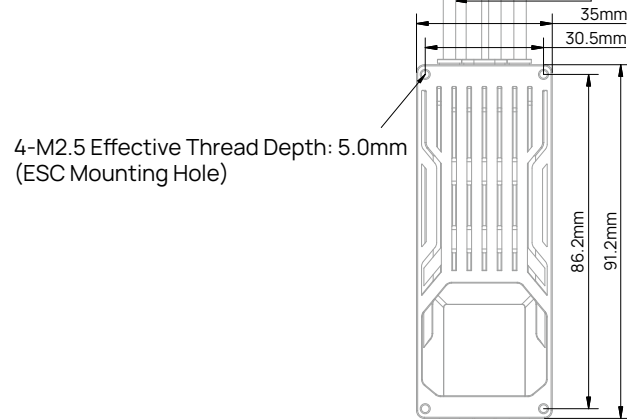

4-M2.5 Effective Thread Depth: 5.0mm
 (ESC Mounting Hole)

Negative Power Supply: 12AWG, Black
 Exposed Length: 145mm±5mm

Positive Power Supply: 12AWG, Red
 Exposed Length: 145mm±5mm

5-Pin Shielded Cable
 Exposed Length: 410mm±5mm

(JR Connector Not Included)

JR-3P Male Connector for Throttle

JR-3P Male Connector for CAN Communication

Black GND
 White S
 Yellow GND
 Grey CH
 Green CL

