
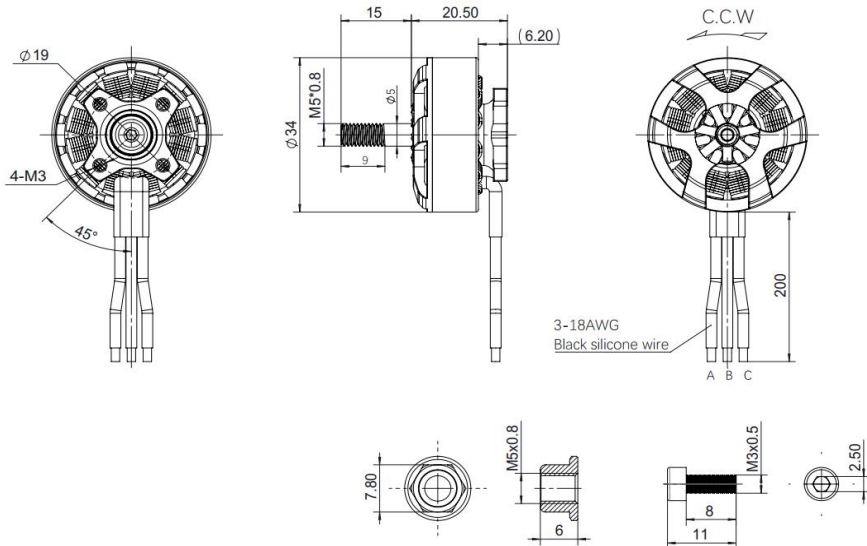


XRotor-2807 1700KV Specification (规格)

Rated Voltage (LiPo) 工作额定电压 (LiPo)	3-4S	KV KV值	1700KV
No-Load Current 空载电流	2.13A/16V	Resistance 相间内阻	37.5mΩ
Rated power output 额定输出功率	160W	Motor Weight 电机重量	58.4g
Maximum Current 最大电流	53.9A/13s	Pole/Slot 槽极数	12N14P
Maximum power 最大功率	864W/13s	Motor Lead Type 线号	18AWG
Maximum propeller pull 最大螺旋桨拉力	2205g	Motor Lead Length 出线长度	200mm
Motor Size 电机尺寸	Φ 34 *20.5mm	Enamelled Wire Insulation Class 漆包线绝缘等级	耐220℃高温 C级
Shaft Diameter 出轴直径	D5+M5	Recommended ESC 推荐电调	XRotor FPV-G2-65A-4in ECS
Shaft Length 出轴长度	15mm	Propeller 螺旋桨	3-4S:HQ7x3.5x3; HQ7x4x3
Screw Diameter / Thread 底座螺纹	Φ 19mm-4*M3		

Load Performance
负载性能参数

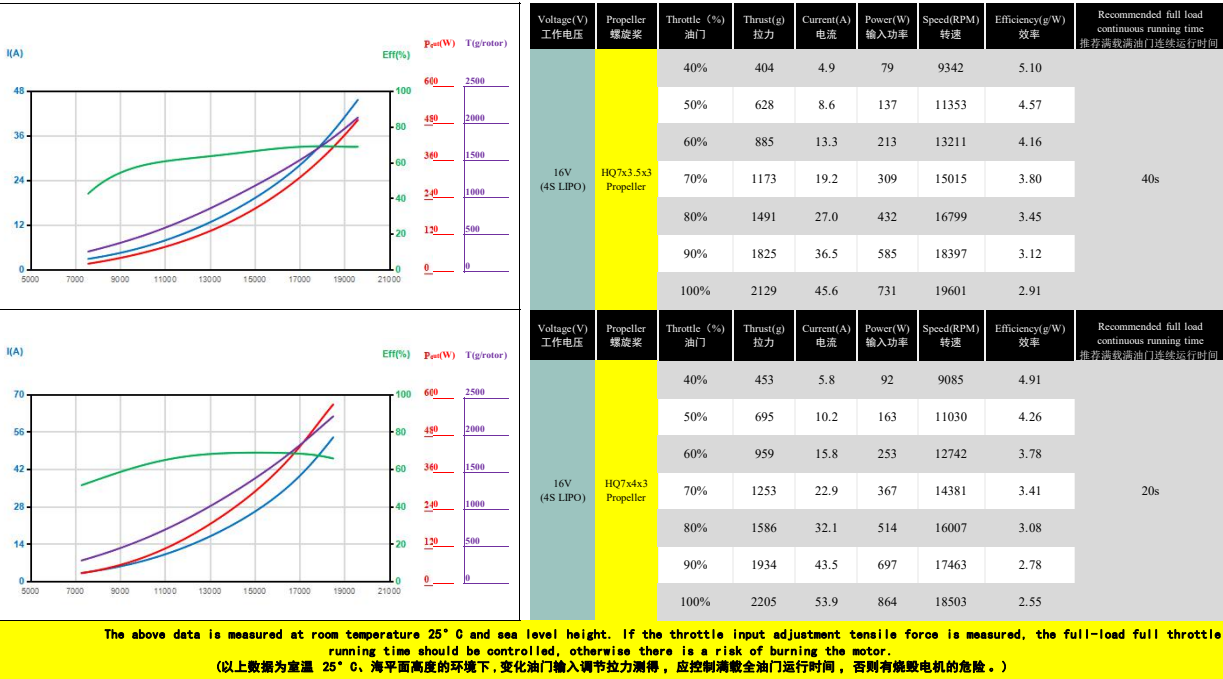

2807SL