



RTF-3110 900KV Specification(规格)

Rated Voltage(LiPo) 工作额定电压 (LiPo)	4-6S	KV KV值	900KV
No-Load Current 空载电流	2. 2A/24V	Resistance 相间内阻	59mΩ
Rated power output 额定输出功率	250W	Motor Weight 电机重量	89g
Maximum Current 最大电流	63A/10s	Pole/Slot 槽极数	12N14P
Maximum power 最大功率	1500W/10s	Motor Lead Type 线号	18AWG
Maximum propeller pull 最大螺旋桨拉力	3626g	Motor Lead Length 出线长度	250mm
Motor Size 电机尺寸	Φ 37. 2 *27mm	Enamelled Wire Insulation Class 漆包线绝缘等级	耐220℃高温 C级
Shaft Diameter 出轴轴径	D5+M5	Recommended ESC 推荐电调	XRotor-65A-4in1-6S-Lite-BLS-V2-RTF XRotor-65A-4in1-6S-Lite-AT-RTF
Shaft Lenght 出轴长度	16mm	Propeller 螺旋桨	6S:HQ8x4. 5x3;HQ9x4x3;HQ9x5x3
Screw Diameter / Thread 底座螺纹	Φ 19mm-4*M3		

Load Performance
负载性能参数

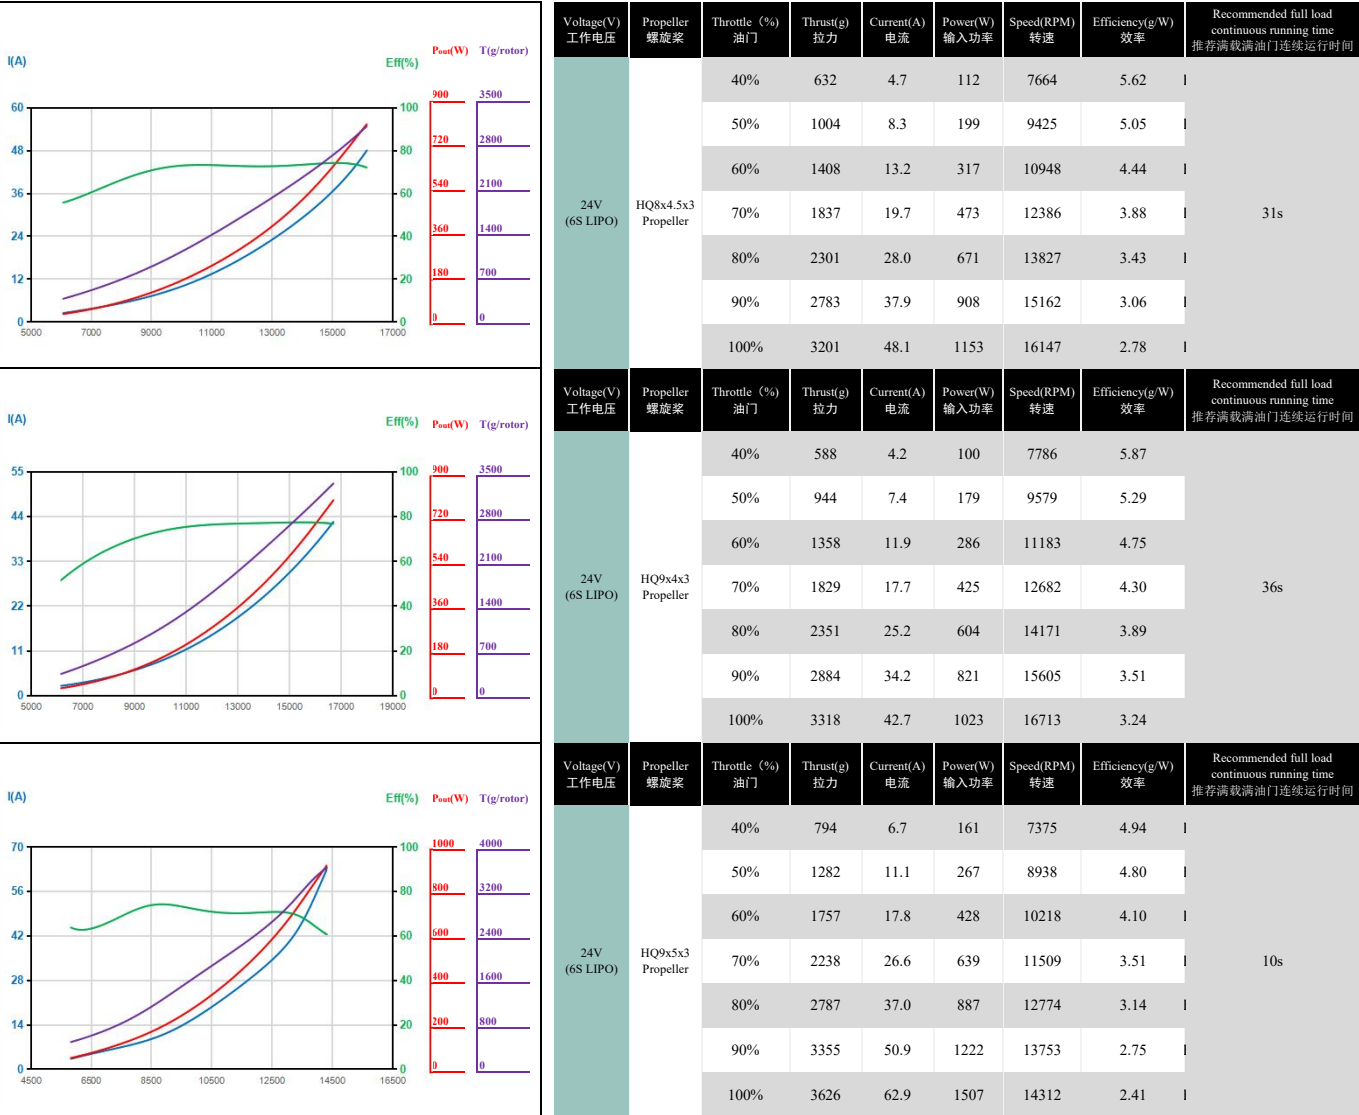

The above data is measured at room temperature 25°C and sea level height. If the throttle input adjustment tensile force is measured, the full-load full throttle running time should be controlled, otherwise there is a risk of burning the motor.
(以上数据为室温 25°C、海平面高度的环境下变化油门输入调节拉力测得，应控制满载全油门运行时间，否则有烧毁电机的危险。)

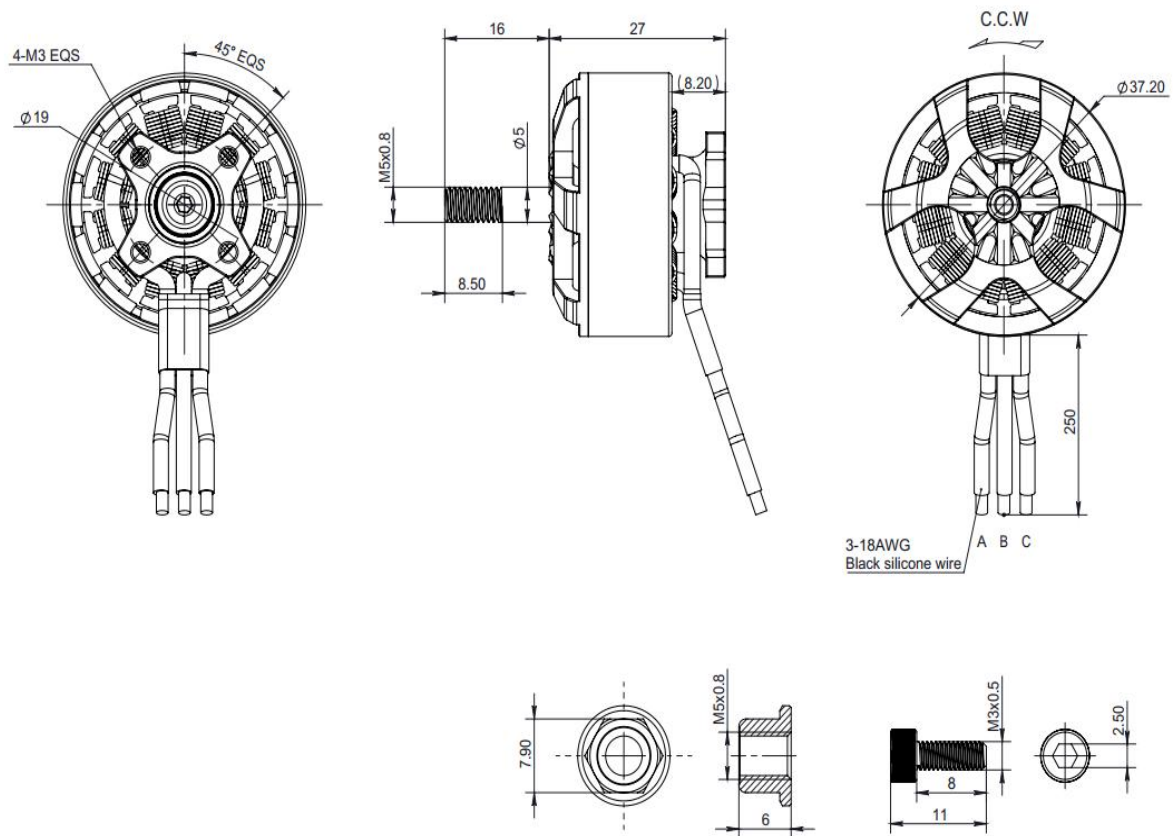

3110SL