
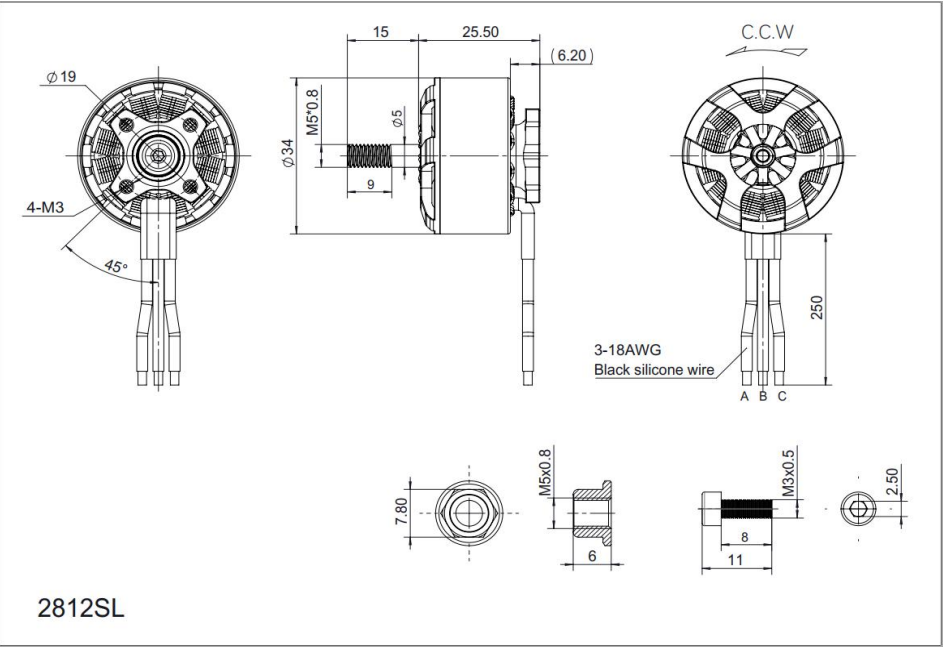


XRotor-2812 900KV Specification (规格)

Rated Voltage (LiPo) 工作额定电压 (LiPo)	4-6S	KV KV值	900KV
No-Load Current 空载电流	1.5A/24V	Resistance 相间内阻	63.9mΩ
Rated power output 额定输出功率	200W	Motor Weight 电机重量	83.4g
Maximum Current 最大电流	49.6A/9s	Pole/Slot 槽极数	12N14P
Maximum power 最大功率	1191W/9s	Motor Lead Type 线号	18AWG
Maximum propeller pull 最大螺旋桨拉力	3355g	Motor Lead Length 出线长度	250mm
Motor Size 电机尺寸	Φ34 *25.5mm	Enamelled Wire Insulation Class 漆包线绝缘等级	耐220℃高温 C级
Shaft Diameter 出轴轴径	D5+M5	Recommended ESC 推荐电调	XRotor FPV-G2-65A-4in ECS
Shaft Length 出轴长度	15mm	Propeller 螺旋桨	4-6S: HQ8x4.5x3R; HQ9x5x3
Screw Diameter / Thread 底座螺纹	Φ19mm-4*M3		

Load Performance
负载性能参数

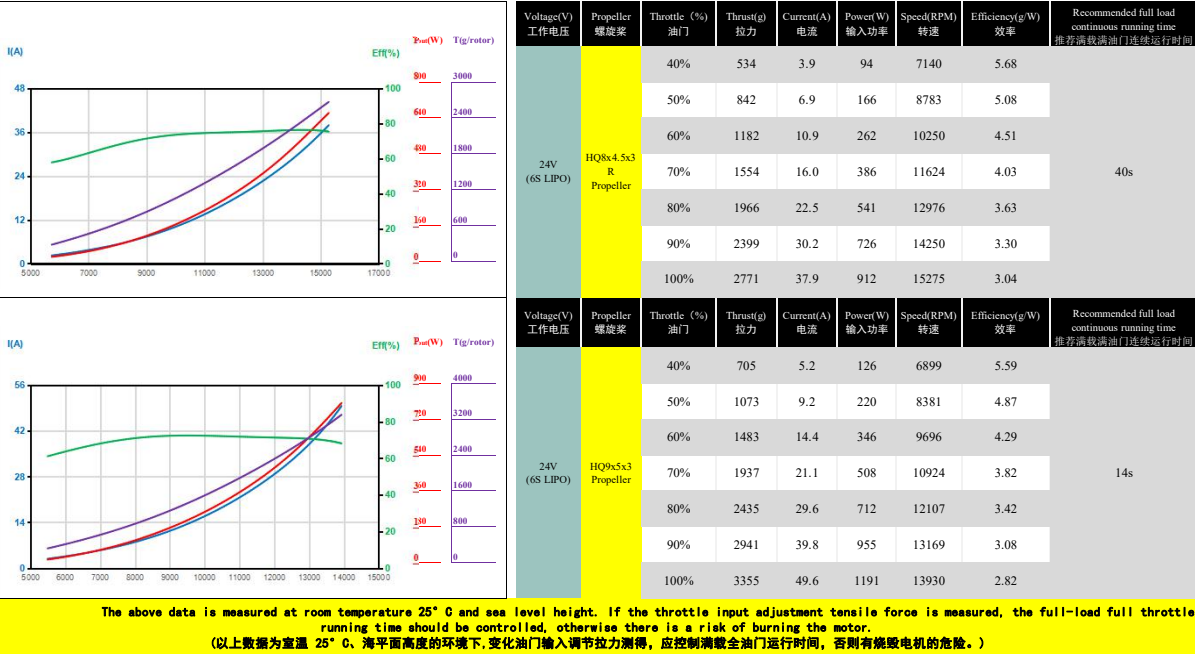

2812SL