



LOAD PERFORMANCE PARAMETERS


负载性能参数

以下数据为好盈实验室于室温 25℃、海平面高度，变化油门输入调节测得，机壳温度为65%油门运行10分钟数据，仅供参考。

The below data is measured by HobbyWing laboratory at room temperature 25℃, sea level, change the throttle input adjustment, the motor housing temperature is 65% and the throttle runs for 10 minutes, for reference only.

720V上轴负载性能参数


720V Load Performance Parameters of Upper Rotor of Coaxial

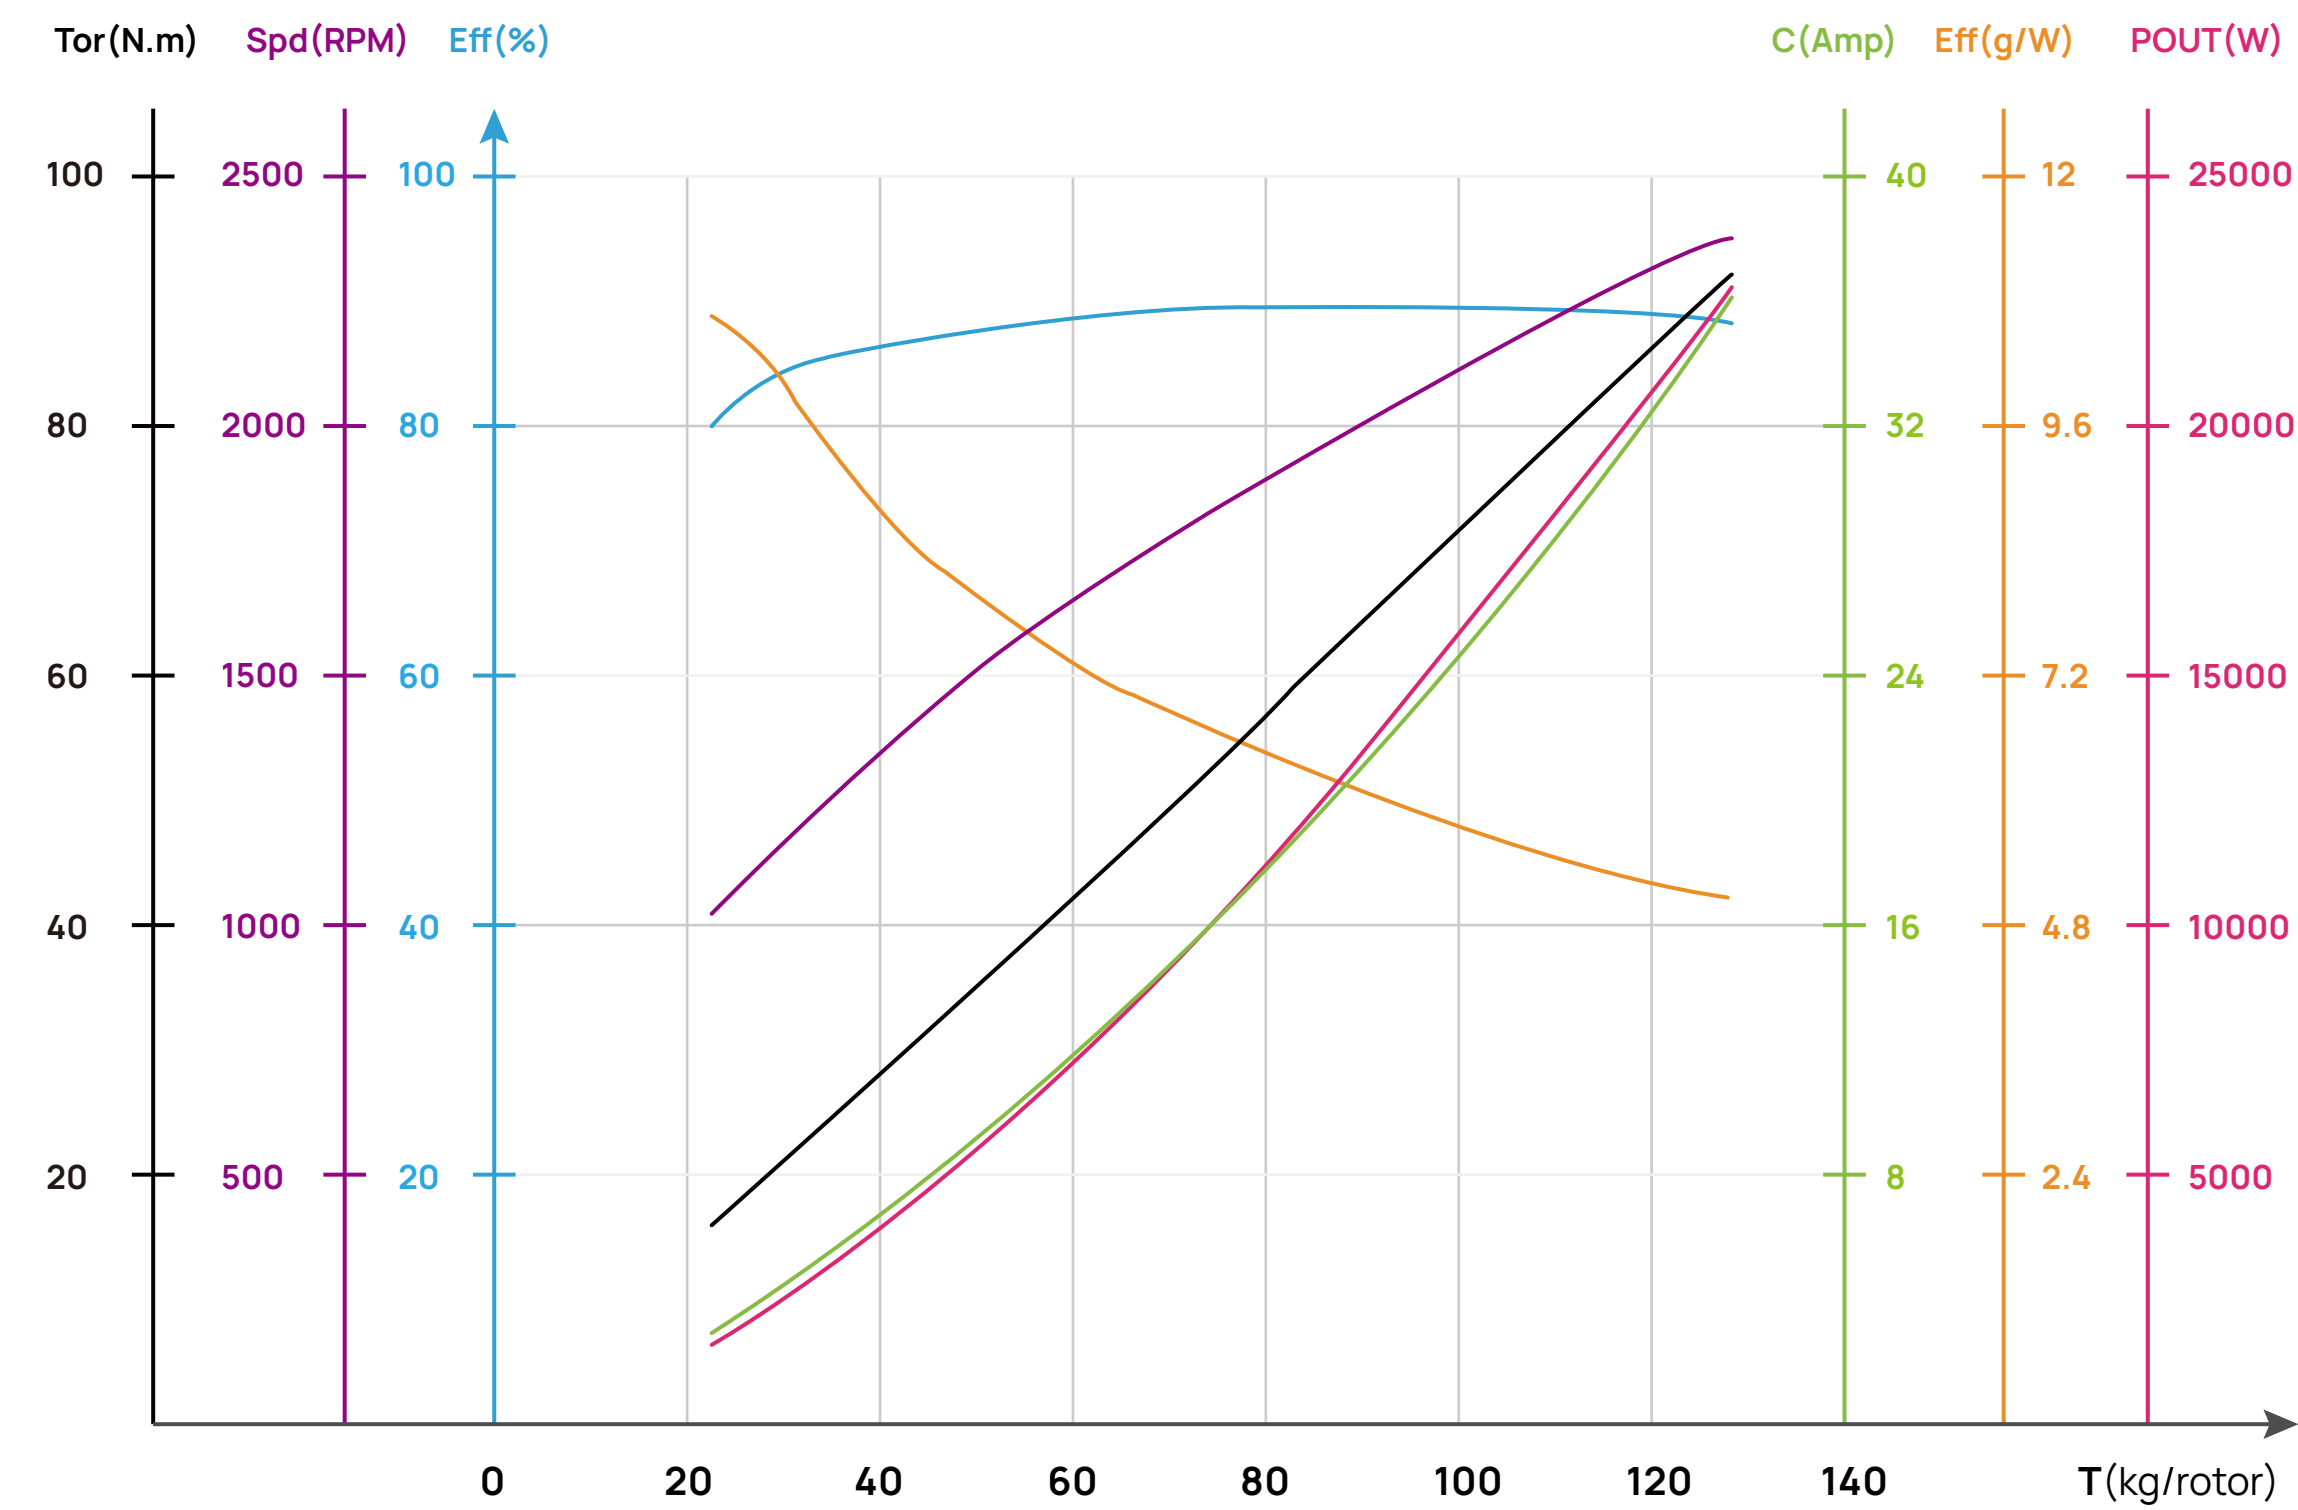

Voltage(V) 工作电压	Propeller 螺旋桨	Throttle(%) 油门	Thrust(g) 拉力	Current(A) 电流	Power Input(W) 输入功率	Speed(RPM) 转速	Efficiency(g/W) 效率	Torque(N·m) 扭矩	Power Output(W) 输出功率	Temperature(℃) 温度
720V	72x25"	38%	38594	6.0	4312.8	1321	8.9	26.72	3696.0	/
		40%	42571	6.9	4975.2	1387	8.6	29.56	4293.2	
		42%	46612	7.9	5688.0	1450	8.2	32.46	4928.5	
		44%	50727	8.9	6436.8	1511	7.9	35.40	5601.0	
		46%	54923	10.0	7221.6	1571	7.6	38.39	6315.3	
		48%	59197	11.2	8049.6	1629	7.4	41.41	7063.5	
		50%	63543	12.4	8906.4	1686	7.1	44.47	7850.9	
		52%	67950	13.6	9806.4	1741	6.9	47.55	8668.5	
		54%	72402	14.9	10742.4	1795	6.7	50.66	9522.0	
		56%	76878	16.3	11714.4	1848	6.6	53.79	10408.8	
		58%	81354	17.7	12722.4	1899	6.4	56.94	11322.4	
		60%	85805	19.1	13766.4	1948	6.2	60.08	12255.1	
		62%	90201	20.6	14832.0	1995	6.1	63.21	13204.6	
		64%	94512	22.1	15926.4	2041	5.9	66.32	14173.7	
		66%	98707	23.6	17020.8	2084	5.8	69.37	15137.9	
		68%	102752	25.2	18122.4	2126	5.7	72.34	16104.2	
		70%	106617	26.7	19202.4	2164	5.6	75.19	17037.8	
		72%	110268	28.1	20246.4	2200	5.4	77.89	17943.2	
		76%	116809	30.8	22161.6	2261	5.3	82.69	19577.2	
		80%	122148	33.0	23745.6	2308	5.1	86.52	20909.8	
		85%	126861	34.9	25135.2	2347	5.0	89.75	22056.9	
		100%	129451	35.9	25876.8	2368	5.0	91.44	22673.3	

720V下轴负载性能参数


720V Load Performance Parameters of Bottom Rotor of Coaxial

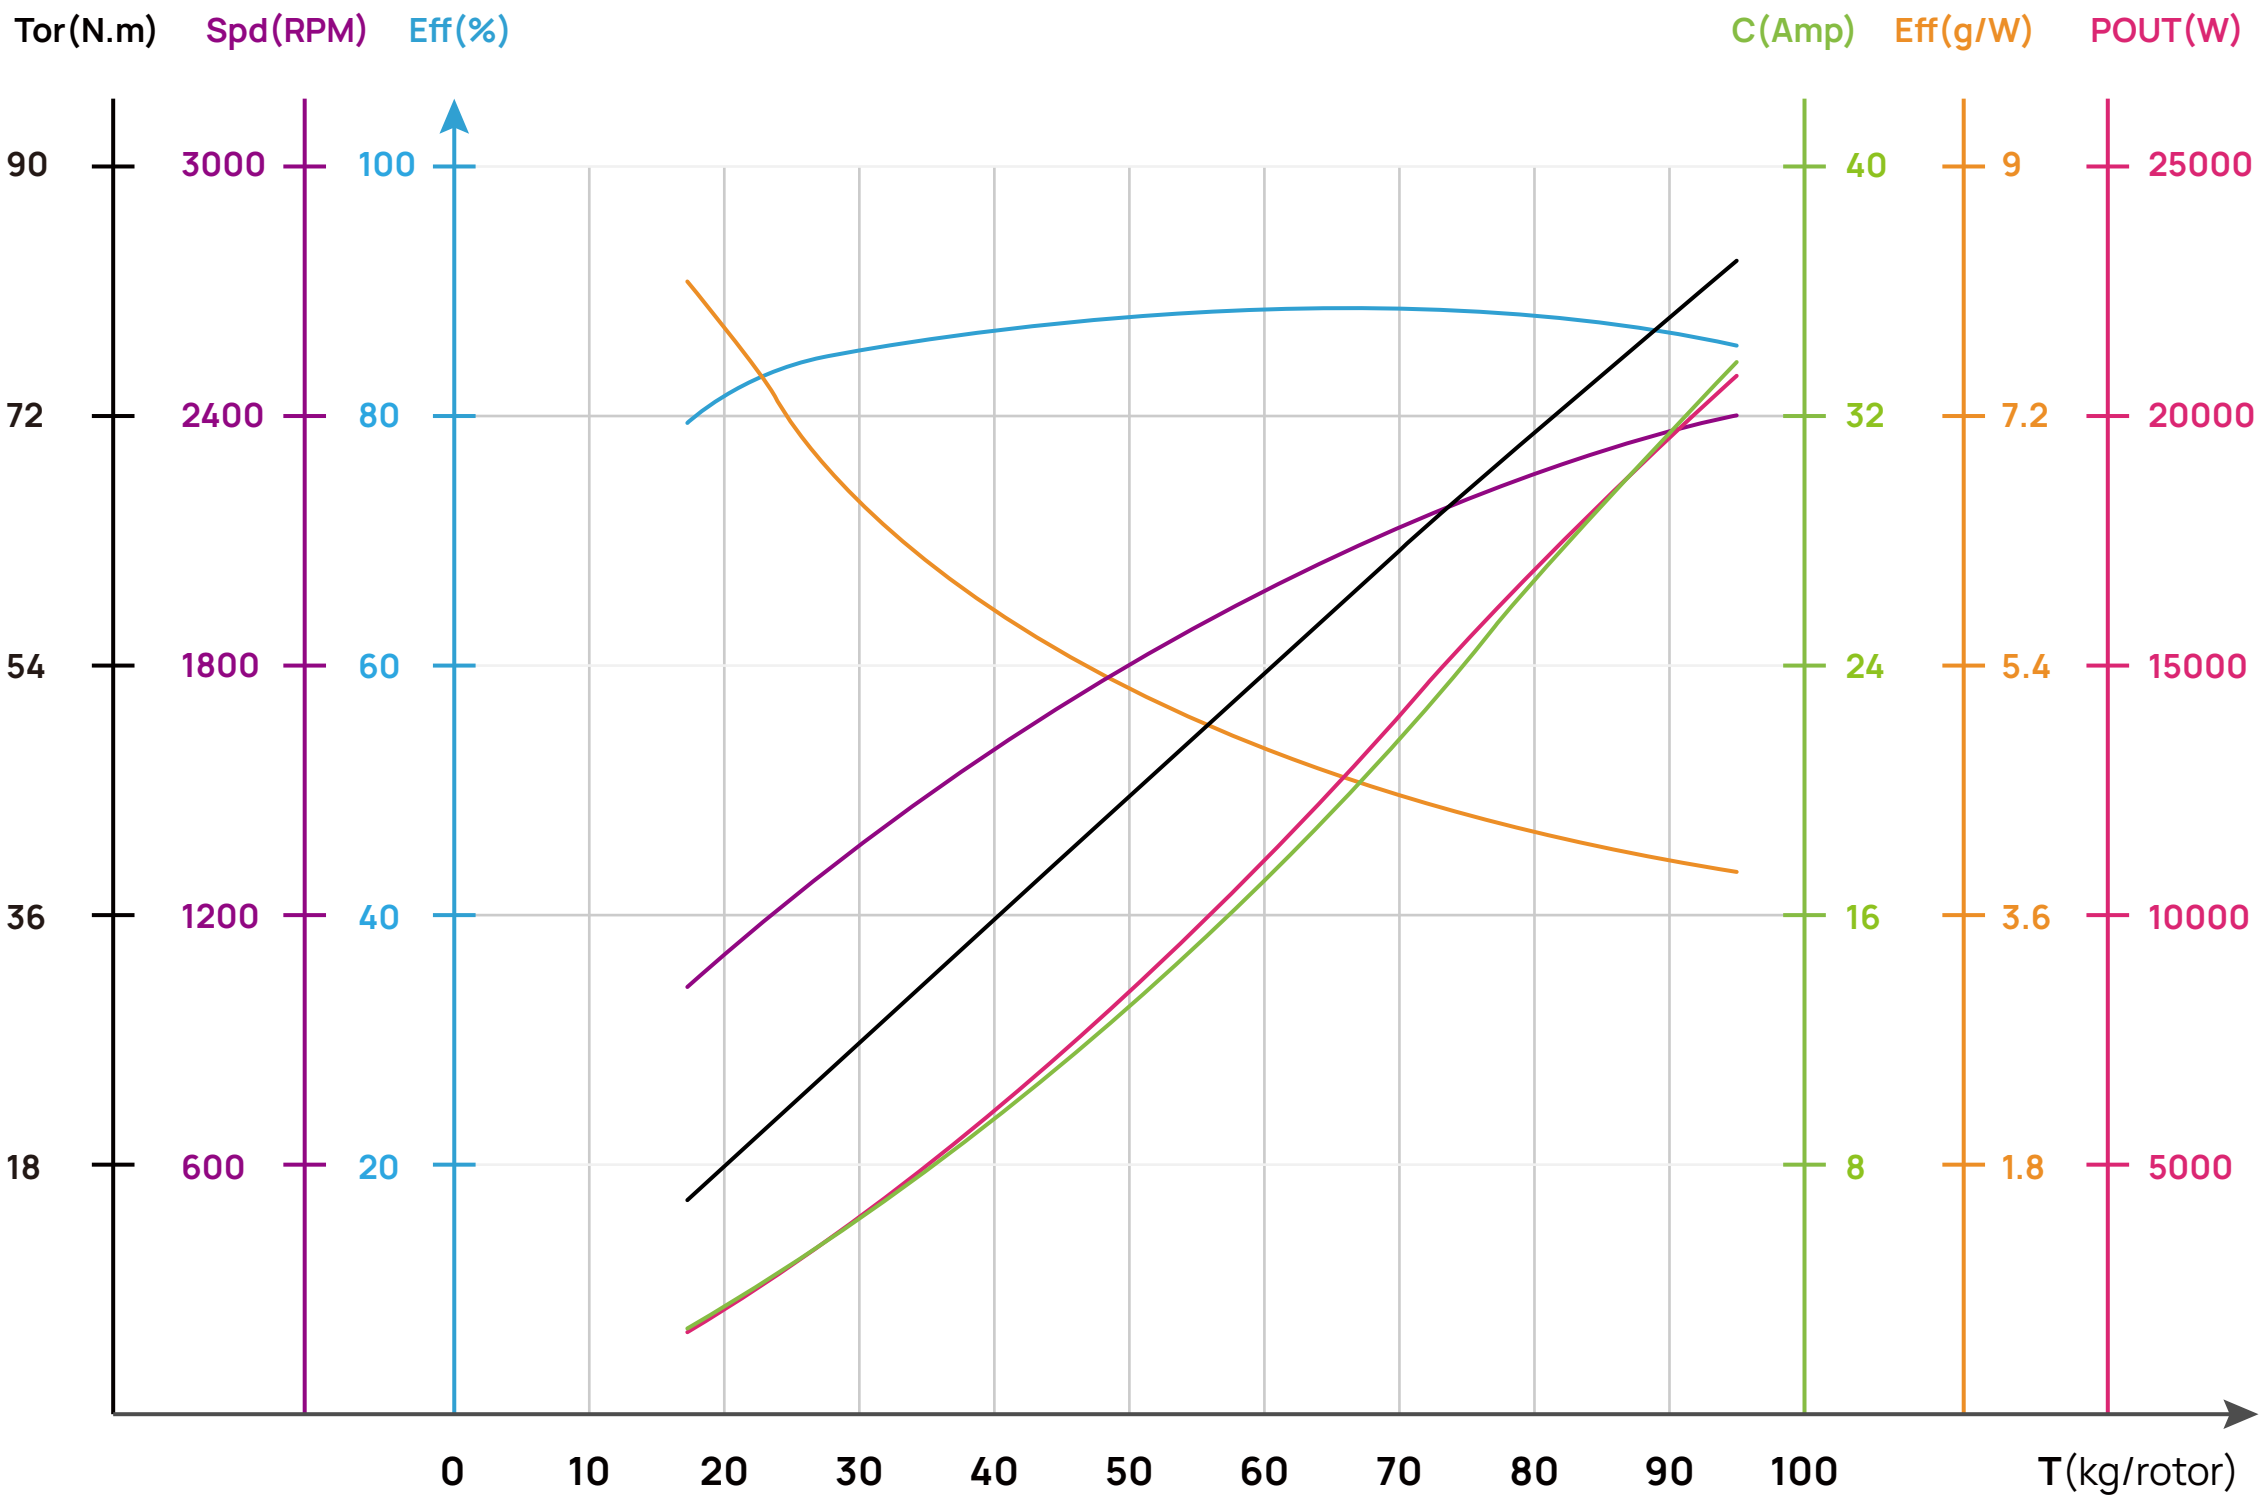

Voltage(V) 工作电压	Propeller 螺旋桨	Throttle(%) 油门	Thrust(g) 拉力	Current(A) 电流	Power Input(W) 输入功率	Speed(RPM) 转速	Efficiency(g/W) 效率	Torque(N·m) 扭矩	Power Output(W) 输出功率	Temperature(°C) 温度
720V	72x25"	38%	27129	5.5	3960.0	1318	6.9	24.36	3361.9	/
		40%	29911	6.3	4564.8	1385	6.6	26.90	3901.2	
		42%	32743	7.2	5205.6	1451	6.3	29.48	4479.1	
		44%	35609	8.2	5882.4	1514	6.1	32.09	5087.4	
		46%	38493	9.1	6580.8	1575	5.8	34.69	5721.1	
		48%	41381	10.2	7308.0	1634	5.7	37.29	6380.3	
		50%	44261	11.2	8049.6	1691	5.5	39.87	7059.7	
		52%	47123	12.2	8812.8	1746	5.3	42.41	7753.7	
		54%	49956	13.3	9590.4	1800	5.2	44.92	8466.6	
		56%	52752	14.4	10382.4	1851	5.1	47.39	9185.2	
		58%	55504	15.5	11181.6	1901	5.0	49.81	9915.1	
		60%	58206	16.7	12002.4	1949	4.8	52.20	10653.2	
		62%	60851	17.8	12823.2	1995	4.7	54.53	11391.3	
		64%	63435	19.0	13651.2	2038	4.6	56.82	12125.6	
		66%	65953	20.1	14479.2	2079	4.6	59.06	12857.1	
		68%	68401	21.3	15307.2	2118	4.5	61.23	13579.6	
		70%	70776	22.4	16128.0	2154	4.4	63.35	14288.6	
		72%	73074	23.5	16941.6	2187	4.3	65.39	14974.7	
		76%	77426	25.7	18496.8	2246	4.2	69.25	16286.4	
		80%	81428	27.7	19944.0	2294	4.1	72.74	17472.8	
		85%	85888	29.9	21520.8	2339	4.0	76.51	18738.9	
		100%	94526	33.7	24278.4	2395	3.9	83.04	20825.2	

720V共轴负载性能参数


720V Load Performance Parameters of Coaxial

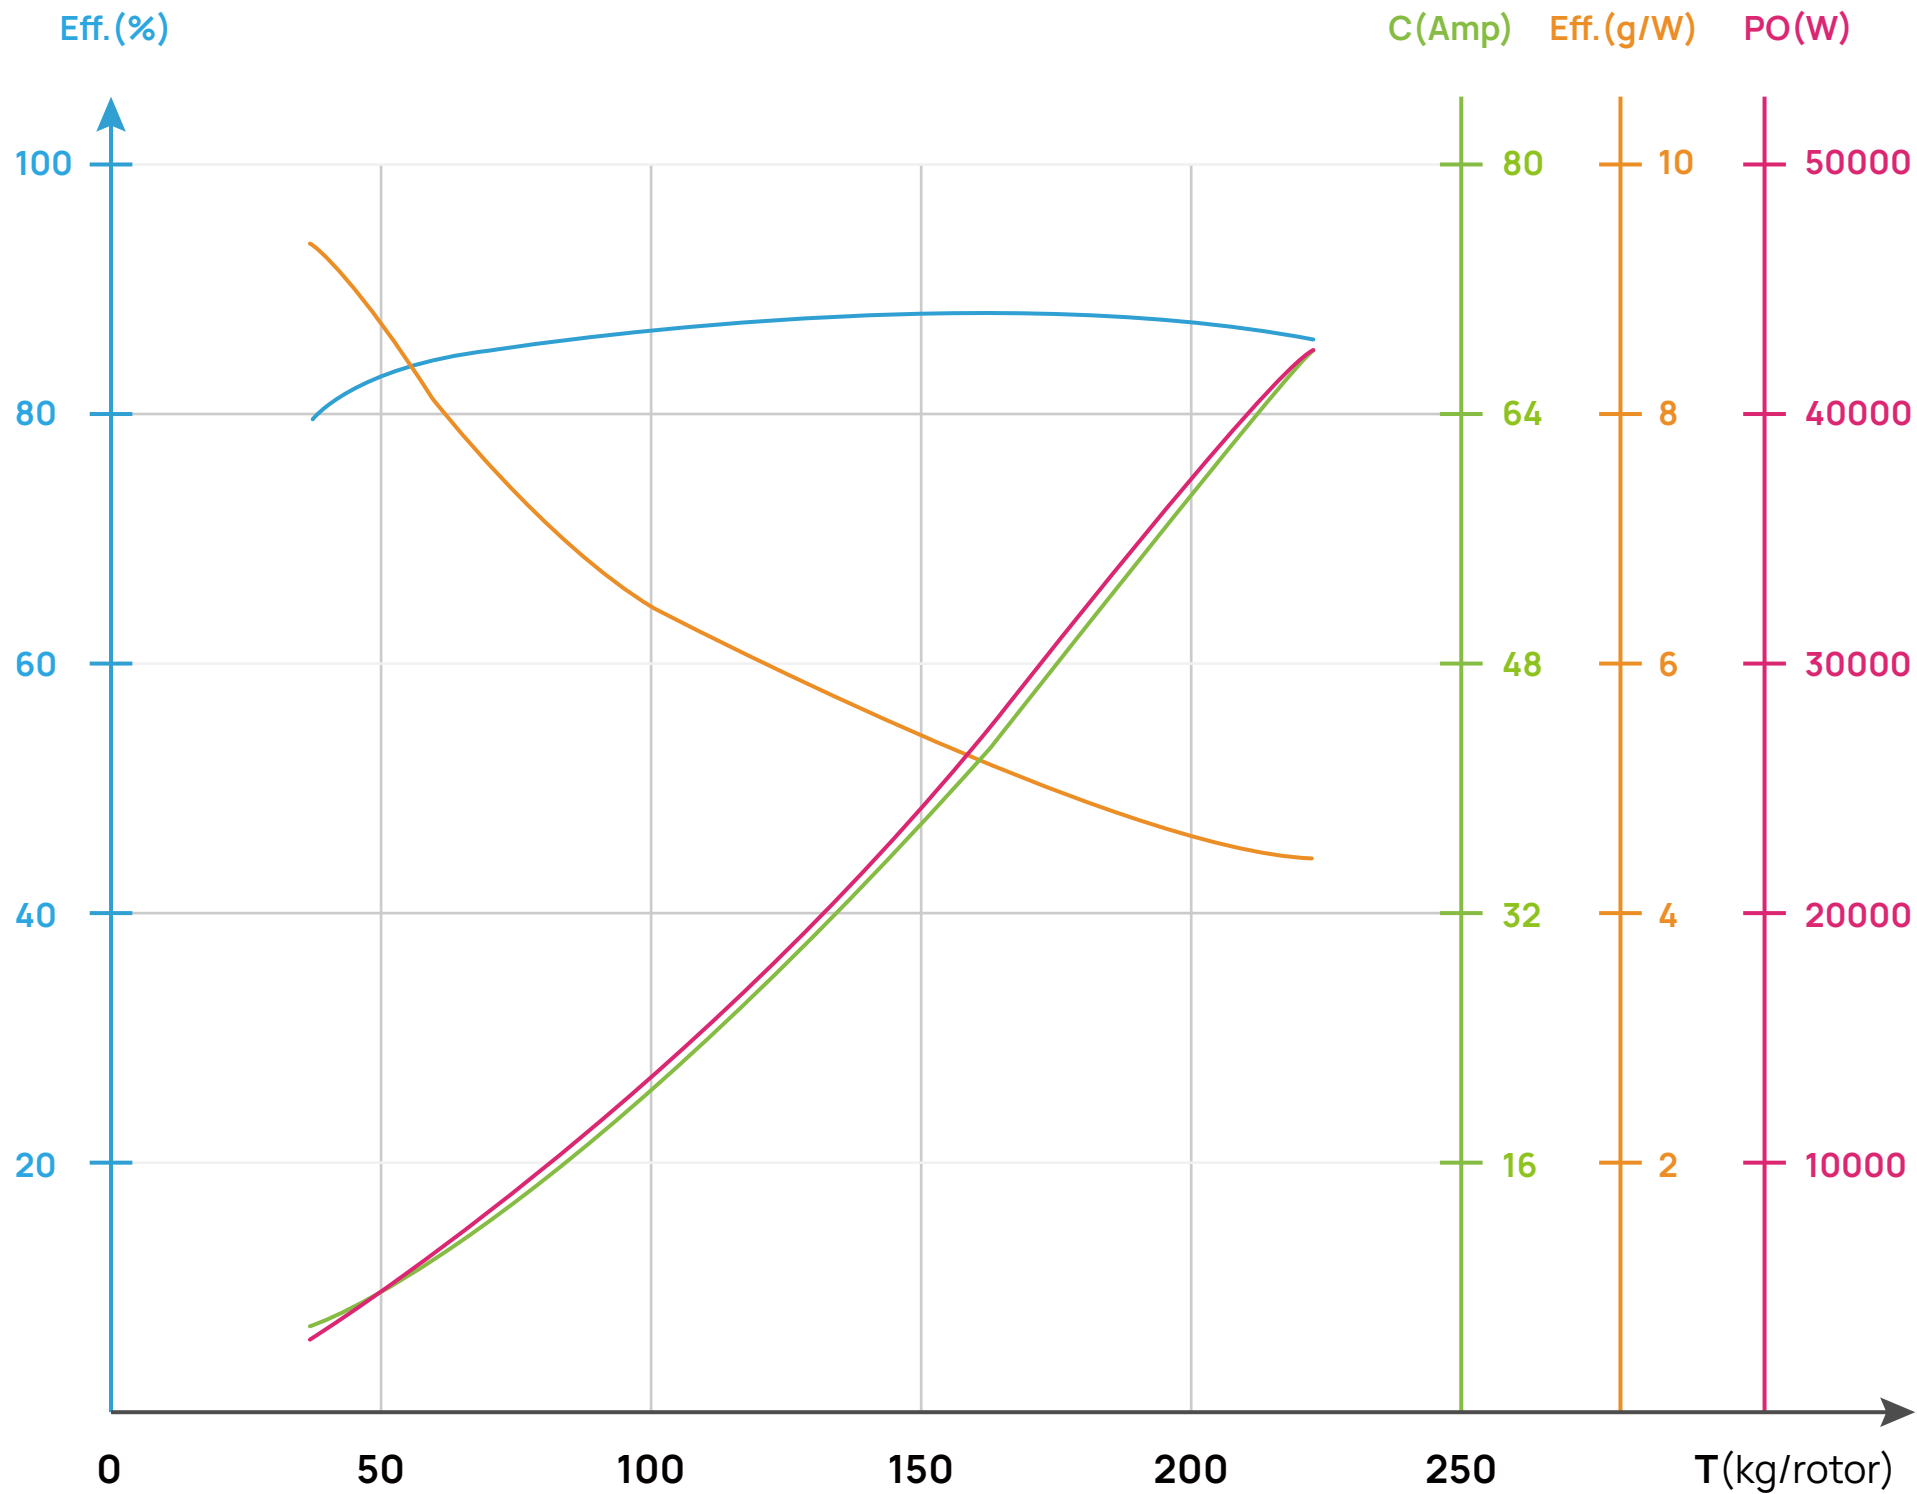

Voltage(V) 工作电压	Propeller 螺旋桨	Throttle(%) 油门	Thrust(g) 拉力	Current(A) 电流	Power Input(W) 输入功率	Efficiency(%) 效率	Efficiency(g/W) 力效	Input Current of Upper Rotor of Coaxial(A) 上轴输入电流	Power Input of Upper Rotor of Coaxial(W) 上轴输入功率	Input Current of Bottom Rotor of Coaxial(A) 下轴输入电流	Power Input of Bottom Rotor of Coaxial(W) 下轴输入功率	Power Output(W) 输出功率	Temperature(°C) 温度
720V	72x25"	38%	65722	11.5	8272.8	85.35	7.9	6.0 5.5	4312.8 3960.0			7060.8	/
		40%	72482	13.3	9540.0	85.88	7.6	7.0 6.3	4975.2 4564.8			8193.0	
		42%	79355	15.1	10893.6	86.35	7.3	7.9 7.2	5688.0 5205.6			9406.6	
		44%	86336	17.1	12319.2	86.79	7.0	9.0 8.1	6436.8 5882.4			10691.8	
		46%	93415	19.2	13802.4	87.20	6.8	10.0 9.2	7221.6 6580.8			12035.7	
		48%	100578	21.3	15350.4	87.58	6.6	11.2 10.1	8049.6 7300.8			13443.9	
		50%	107804	23.6	16956.0	87.93	6.4	12.4 11.2	8906.4 8049.6			14909.4	
		52%	115073	25.9	18619.2	88.23	6.2	13.6 12.3	9806.4 8812.8			16427.7	
		54%	122357	28.2	20332.8	88.49	6.0	15.0 13.2	10742.4 9590.4			17992.5	
		56%	129629	30.7	22096.8	88.69	5.9	16.3 15.4	11714.4 10382.4			19597.7	
		58%	136858	33.2	23911.2	88.83	5.7	17.7 15.5	12722.4 11188.8			21240.3	
		60%	144010	35.8	25761.6	88.92	5.6	19.1 16.7	13766.4 11995.2			22907.2	
		62%	151051	38.4	27655.2	88.95	5.5	20.6 17.8	14832.0 12823.2			24599.3	
		64%	157947	41.1	29577.6	88.93	5.3	22.1 19.0	15926.4 13651.2			26303.4	
		66%	164659	43.8	31507.2	88.88	5.2	23.6 20.2	17020.8 14486.4			28003.6	
		68%	171154	46.4	33429.6	88.78	5.1	25.2 21.2	18122.4 15307.2			29678.8	
		70%	177393	49.1	35330.4	88.67	5.0	26.7 22.4	19202.4 16128.0			31327.5	
		72%	183342	51.7	37188.0	88.53	4.9	28.1 23.6	20246.4 16941.6			32922.5	
		76%	194235	56.5	40658.4	88.21	4.8	30.8 25.7	22161.6 18496.8			35864.8	
		80%	203576	60.7	43689.6	87.86	4.7	33.0 27.7	23745.6 19944.0			38385.7	
		85%	212748	64.8	46656.0	87.45	4.6	34.9 29.9	25135.2 21520.8			40800.7	
		100%	222056	68.9	49608.0	86.84	4.5	35.6 33.3	25596.0 24012.0			43079.6	

780V上轴负载性能参数


780V Load Performance Parameters of Upper Rotor of Coaxial

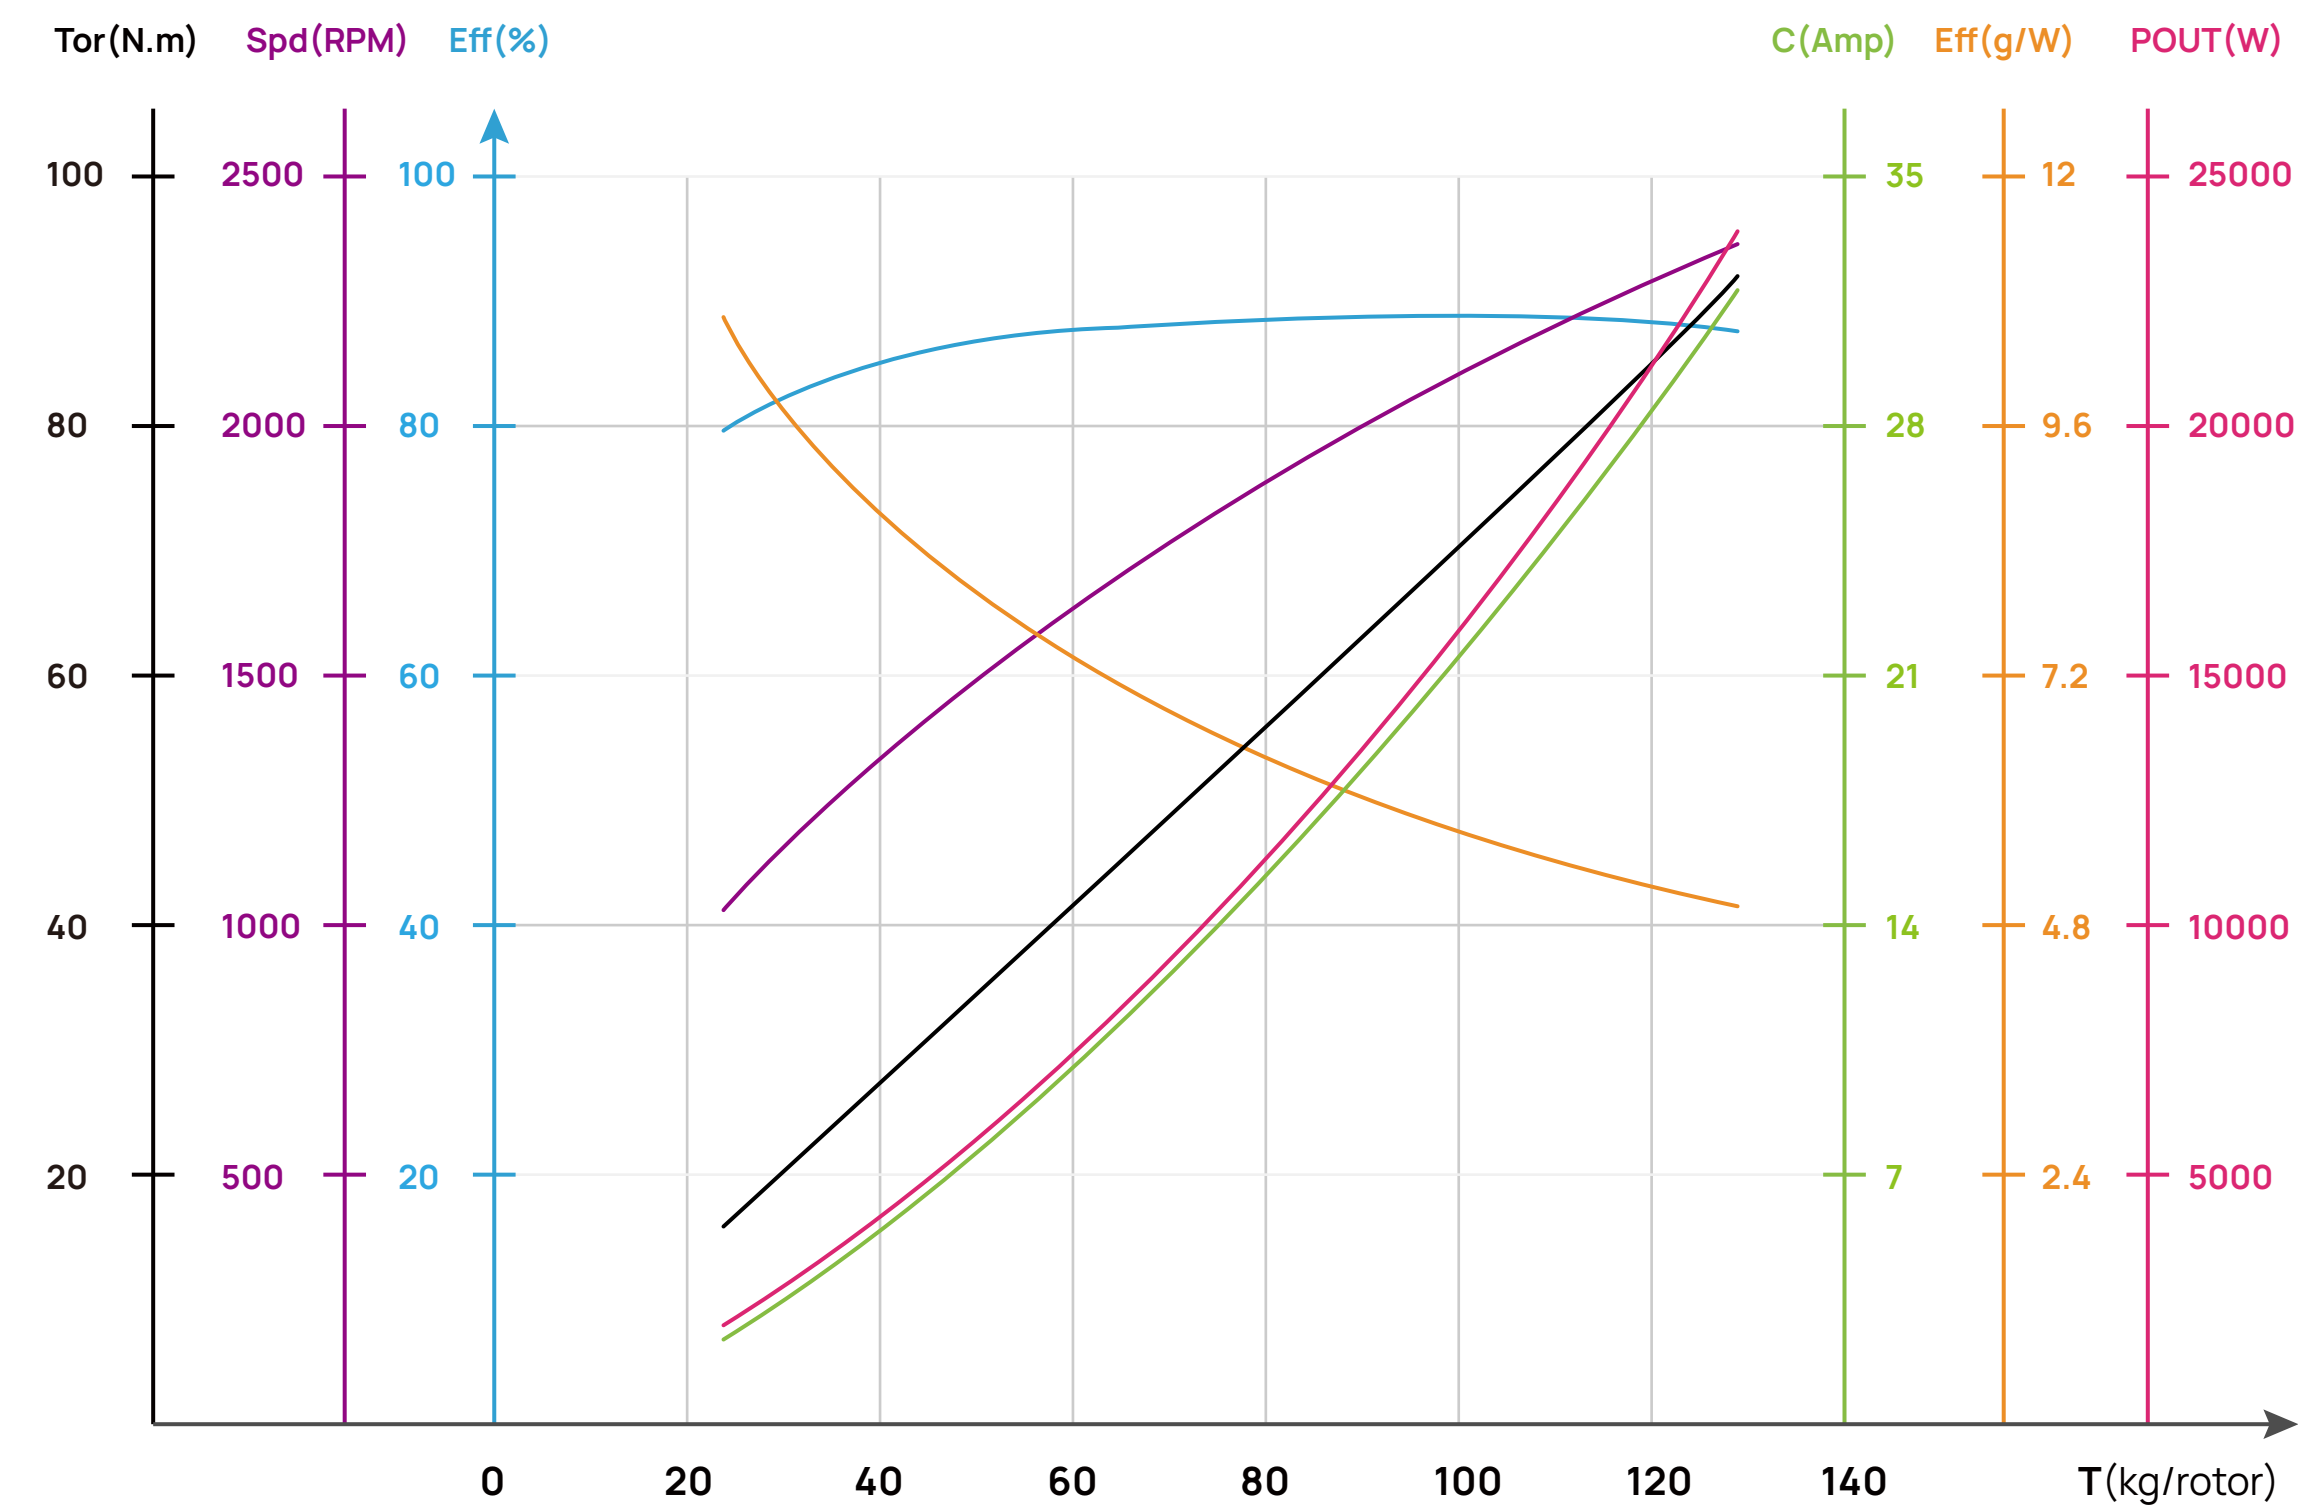

Voltage(V) 工作电压	Propeller 螺旋桨	Throttle(%) 油门	Thrust(g) 拉力	Current(A) 电流	Power Input(W) 输入功率	Speed(RPM) 转速	Efficiency(g/W) 效率	Torque(N·m) 扭矩	Power Output(W) 输出功率	Temperature(℃) 温度
780V	72x25"	38%	38470	5.6	4383.6	1323	8.8	26.86	3721.0	/
		40%	42410	6.4	5023.2	1388	8.4	29.60	4302.1	
		42%	46409	7.3	5701.8	1450	8.1	32.38	4916.3	
		44%	50484	8.2	6427.2	1511	7.9	35.22	5572.5	
		46%	54645	9.2	7199.4	1570	7.6	38.13	6268.5	
		48%	58895	10.3	8010.6	1628	7.4	41.10	7006.4	
		50%	63229	11.4	8876.4	1684	7.1	44.15	7785.2	
		52%	67635	12.6	9789.0	1740	6.9	47.25	8608.9	
		54%	72099	13.8	10748.4	1794	6.7	50.40	9467.8	
		56%	76598	15.1	11746.8	1847	6.5	53.59	10364.5	
		58%	81107	16.4	12776.4	1898	6.3	56.79	11286.6	
		60%	85598	17.7	13837.2	1948	6.2	59.99	12236.7	
		62%	90039	19.1	14913.6	1997	6.0	63.17	13209.5	
		64%	94397	20.5	16005.6	2043	5.9	66.29	14181.2	
		66%	98636	21.9	17097.6	2087	5.8	69.34	15153.1	
		68%	102722	23.3	18181.8	2128	5.6	72.29	16108.2	
		70%	106618	24.7	19242.6	2167	5.5	75.12	17045.6	
		72%	110289	26.0	20264.4	2202	5.4	77.79	17936.5	
		76%	116827	28.4	22159.8	2263	5.3	82.59	19570.8	
		80%	122096	30.5	23751.0	2308	5.1	86.49	20902.5	
		85%	126626	32.3	25170.6	2344	5.0	89.87	22058.1	
		100%	128861	33.2	25888.2	2361	5.0	91.55	22633.5	

780V下轴负载性能参数


780V Load Performance Parameters of Bottom Rotor of Coaxial

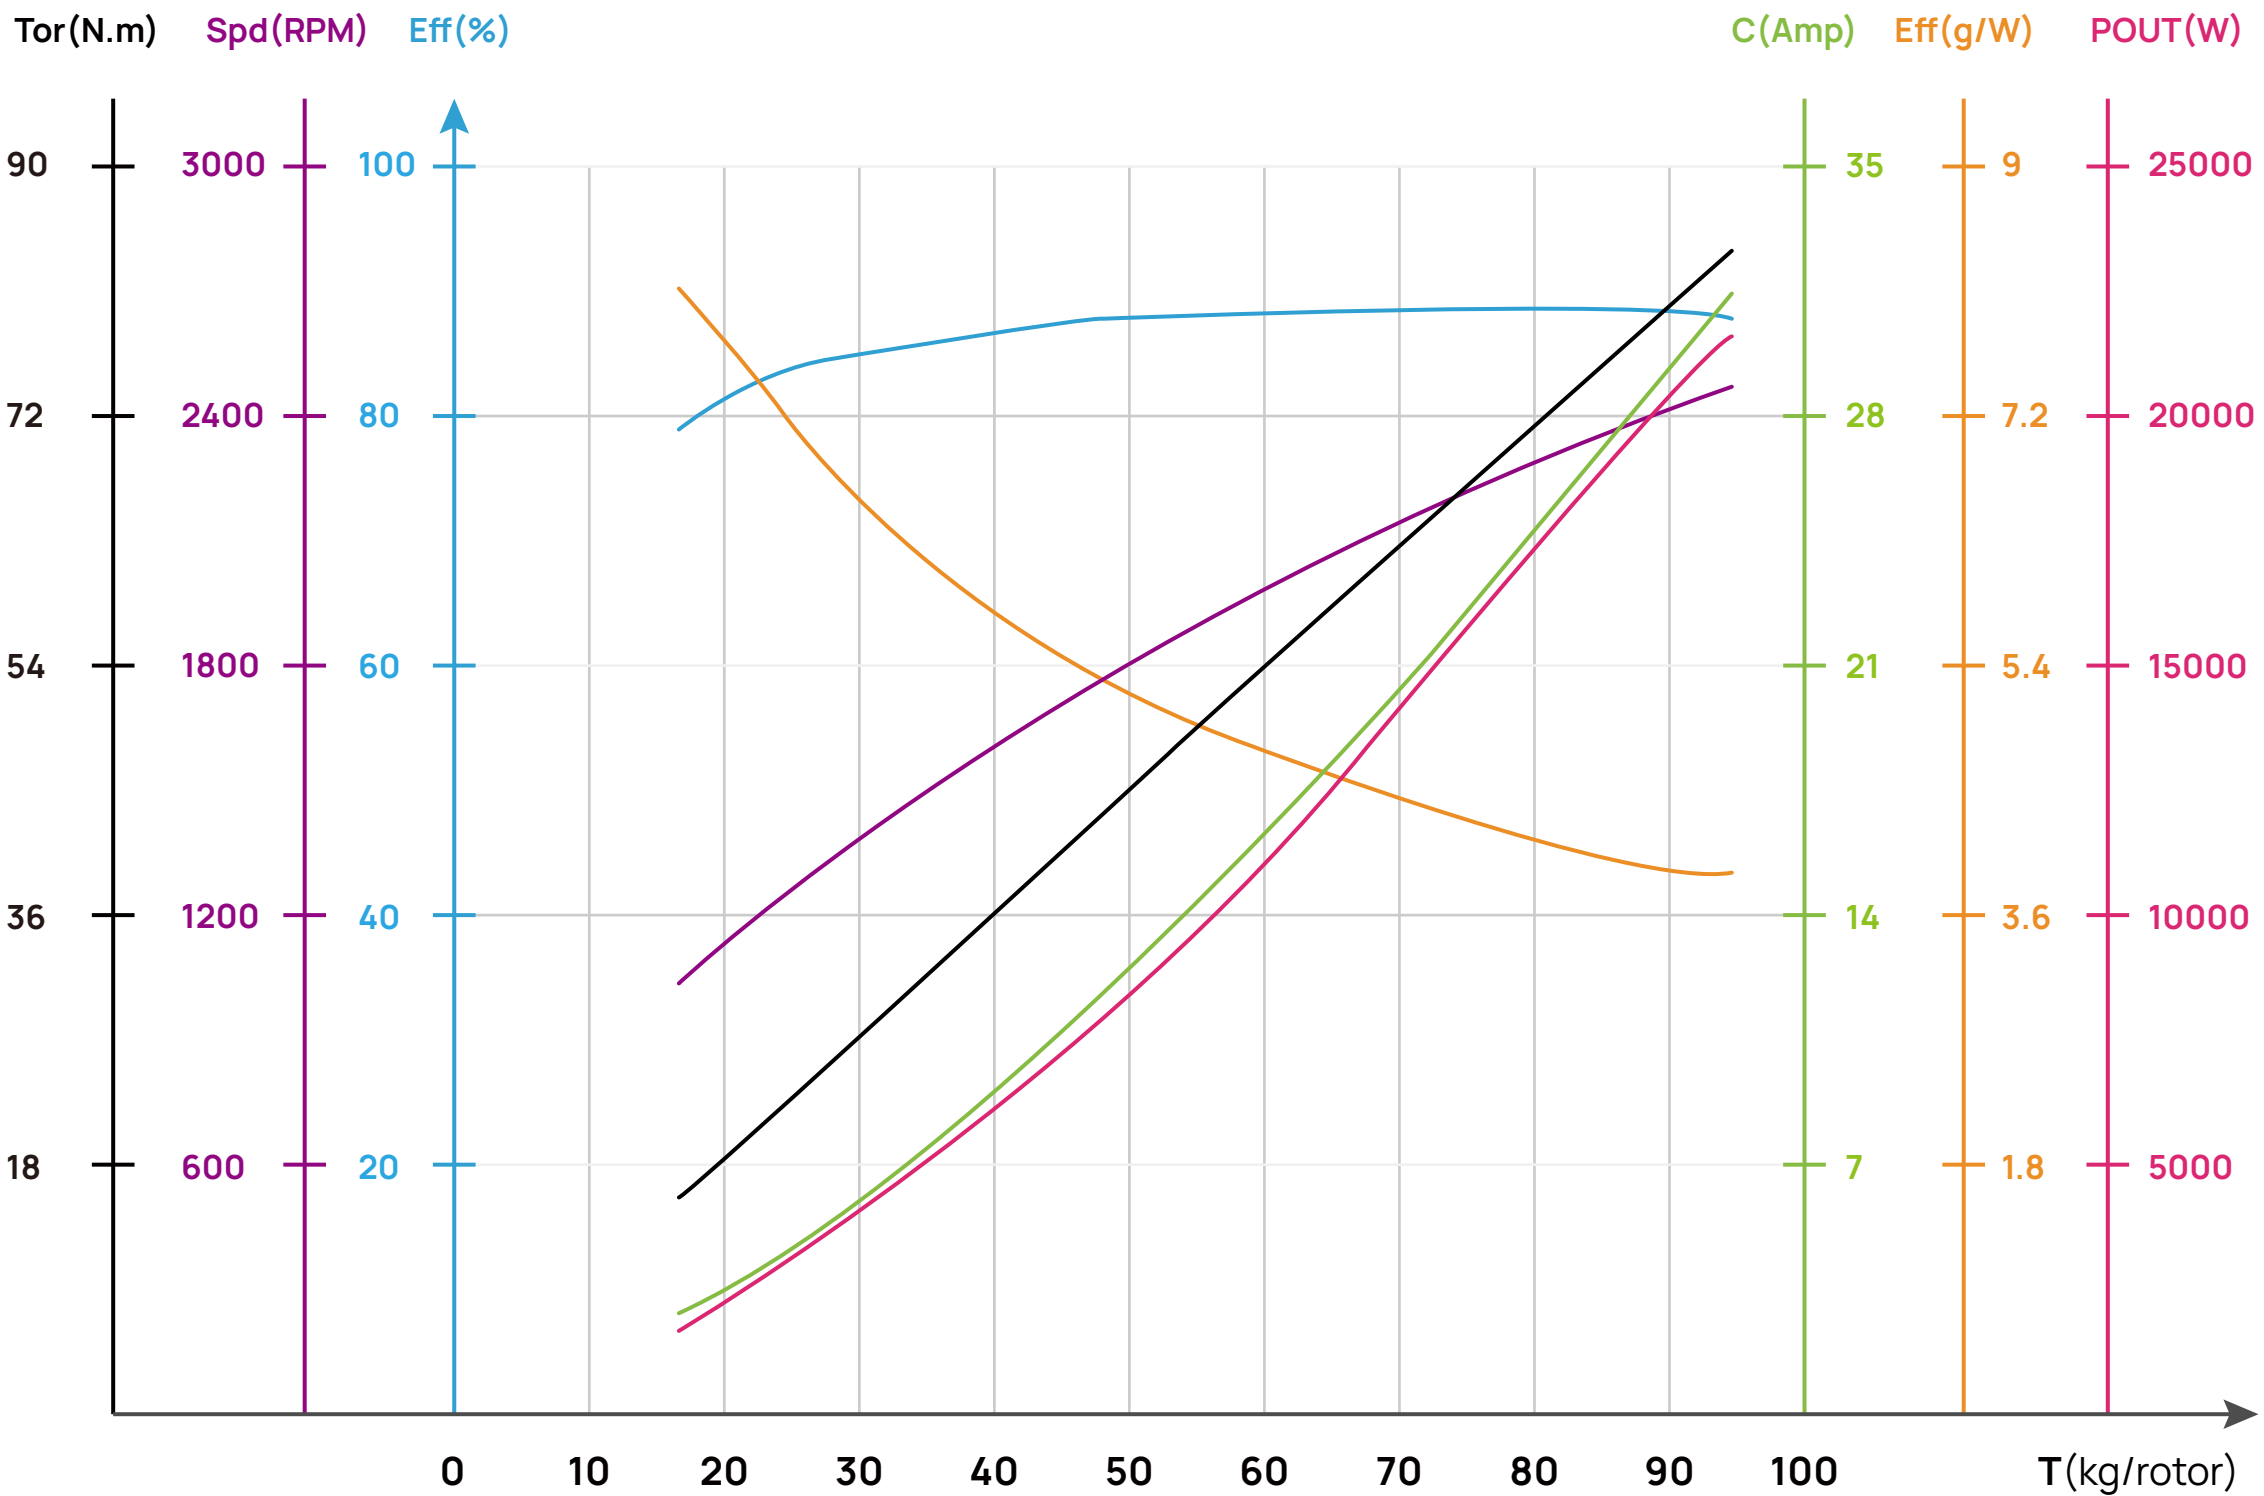

Voltage(V) 工作电压	Propeller 螺旋桨	Throttle(%) 油门	Thrust(g) 拉力	Current(A) 电流	Power Input(W) 输入功率	Speed(RPM) 转速	Efficiency(g/W) 效率	Torque(N·m) 扭矩	Power Output(W) 输出功率	Temperature(℃) 温度
780V	72x25"	38%	27463	5.2	4024.8	1312	6.8	24.62	3382.3	/
		40%	30321	6.0	4648.8	1382	6.5	27.20	3936.2	
		42%	33232	6.8	5319.6	1450	6.2	29.83	4529.2	
		44%	36169	7.7	6021.6	1516	6.0	32.48	5156.0	
		46%	39111	8.7	6747.0	1579	5.8	35.14	5810.1	
		48%	42039	9.6	7488.0	1639	5.6	37.78	6483.9	
		50%	44939	10.6	8244.6	1696	5.5	40.38	7171.1	
		52%	47800	11.6	9009.0	1751	5.3	42.95	7874.9	
		54%	50612	12.6	9789.0	1803	5.2	45.47	8584.5	
		56%	53371	13.6	10576.8	1853	5.0	47.94	9301.9	
		58%	56073	14.6	11372.4	1901	4.9	50.35	10022.5	
		60%	58715	15.6	12168.0	1947	4.8	52.71	10746.2	
		62%	61296	16.6	12979.2	1991	4.7	55.01	11468.6	
		64%	63816	17.7	13782.6	2034	4.6	57.25	12193.4	
		66%	66277	18.7	14601.6	2076	4.5	59.43	12919.0	
		68%	68678	19.8	15412.8	2116	4.5	61.56	13639.9	
		70%	71021	20.8	16224.0	2154	4.4	63.63	14351.7	
		72%	73305	21.8	17027.4	2191	4.3	65.64	15059.4	
		76%	77692	23.9	18603.0	2260	4.2	69.48	16442.4	
		80%	81812	25.8	20108.4	2321	4.1	73.05	17753.8	
		85%	86490	27.9	21785.4	2382	4.0	77.01	19208.1	
		100%	94396	31.2	24367.2	2456	3.9	83.38	21443.1	

780V共轴负载性能参数


780V Load Performance Parameters of Coaxial

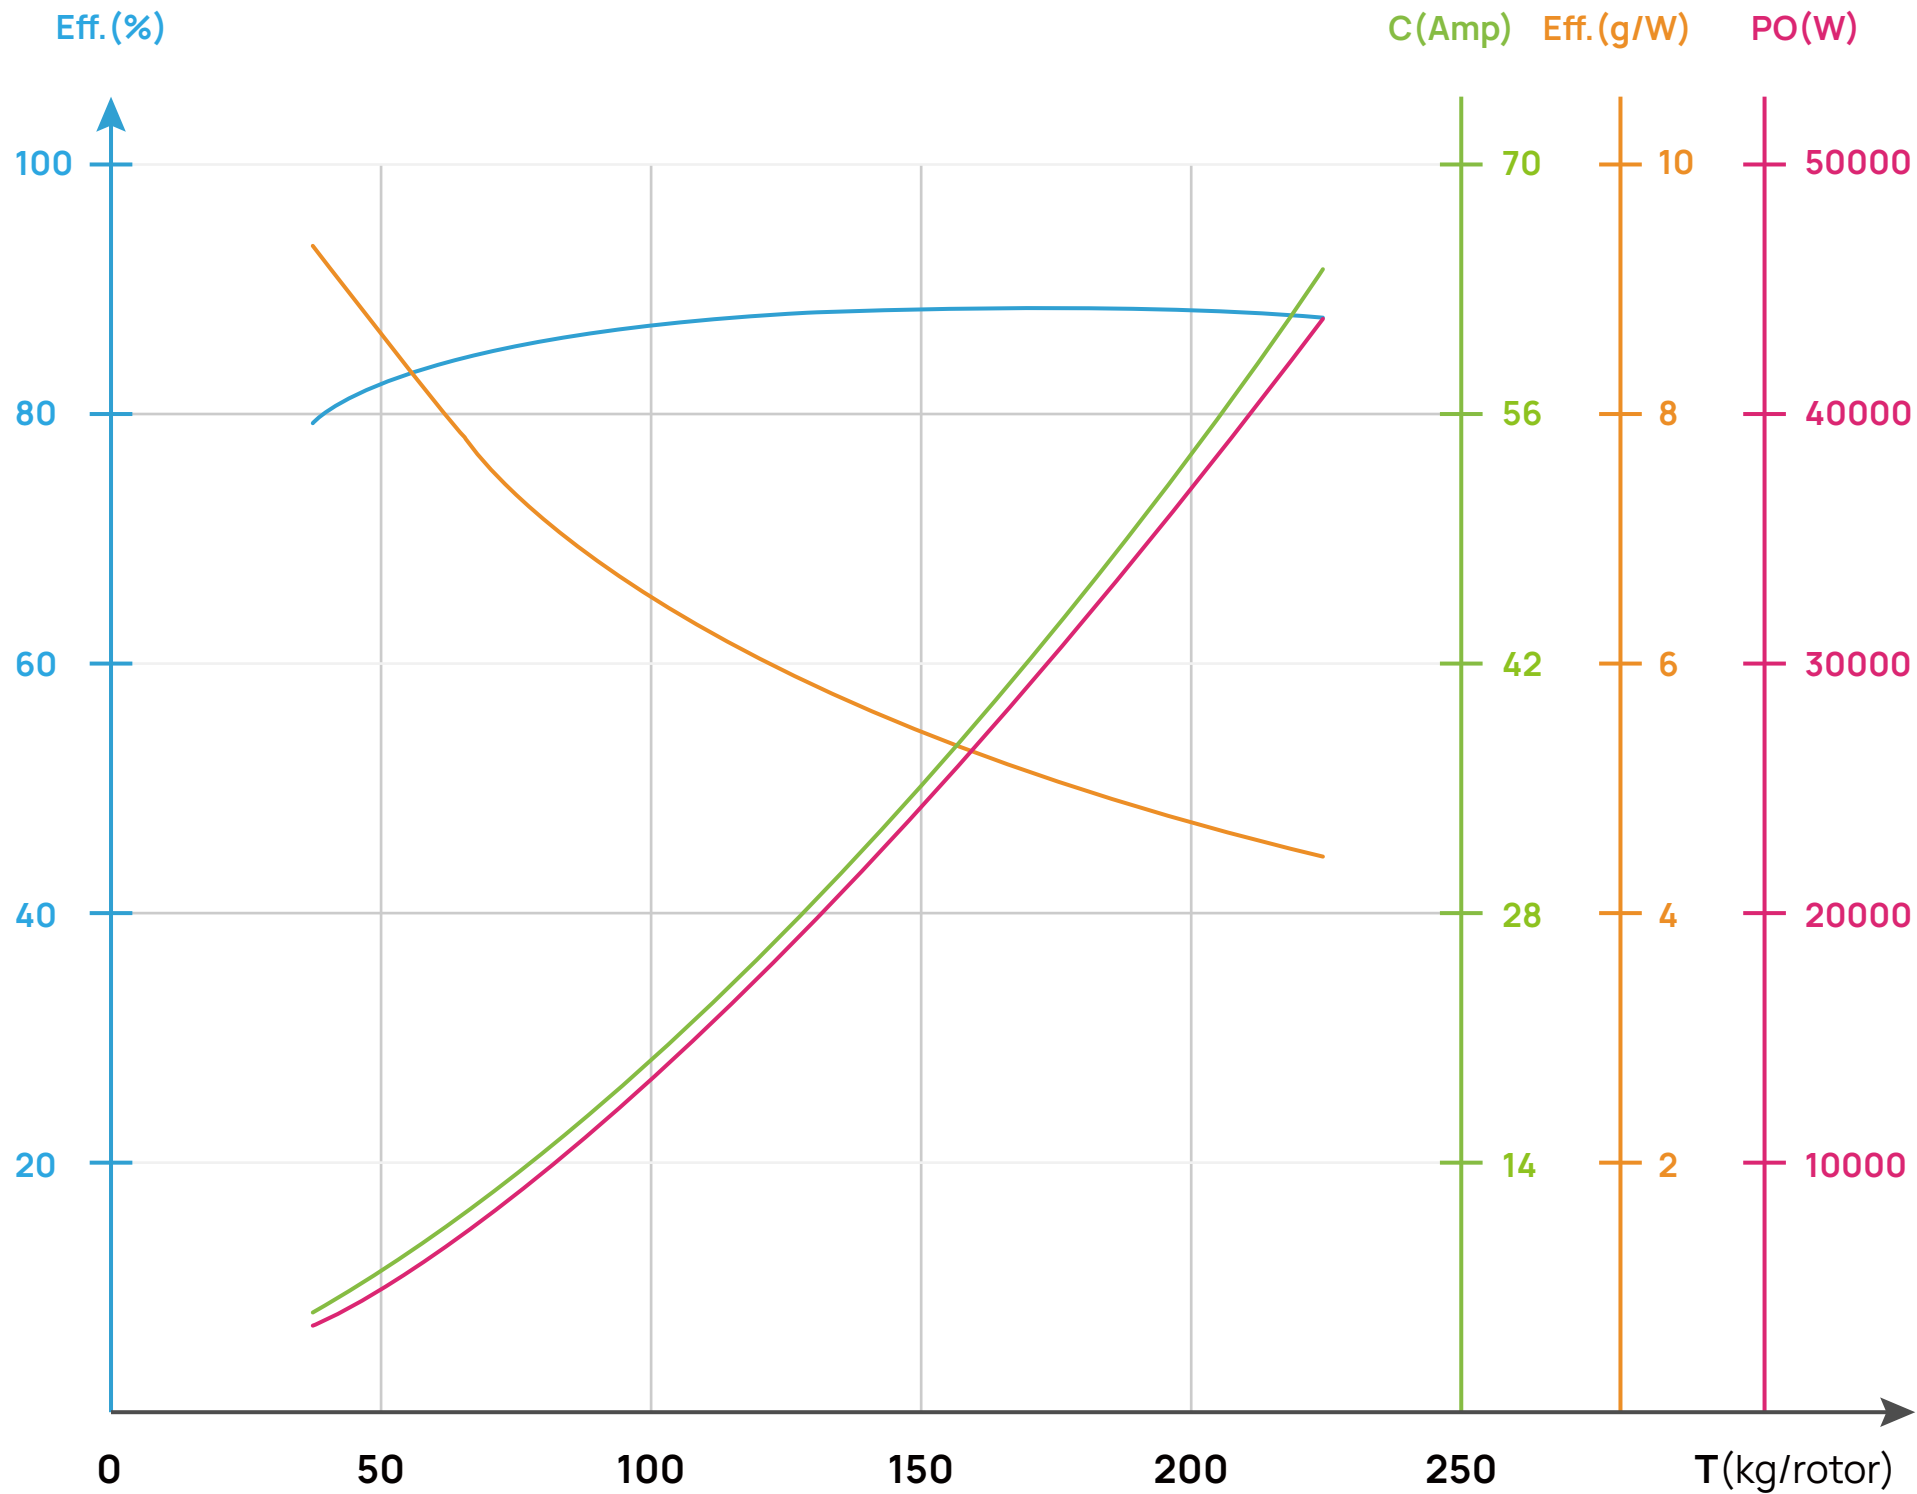

Voltage(V) 工作电压	Propeller 螺旋桨	Throttle(%) 油门	Thrust(g) 拉力	Current(A) 电流	Power Input(W) 输入功率	Efficiency(%) 效率	Efficiency(g/W) 力效	Input Current of Upper Rotor of Coaxial(A) 上轴输入电流	Power Input of Upper Rotor of Coaxial(W) 上轴输入功率	Input Current of Bottom Rotor of Coaxial(A) 下轴输入电流	Power Input of Bottom Rotor of Coaxial(W) 下轴输入功率	Power Output(W) 输出功率	Temperature(°C) 温度
780V	72x25"	38%	65933	10.8	8408.4	84.48	7.8	5.6 5.2	4383.6 4024.8			7103.4	/
		40%	72731	12.4	9679.8	85.14	7.5	6.4 6.0	5023.2 4656.6			8241.4	
		42%	79641	14.1	11021.4	85.71	7.2	7.3 6.8	5701.8 5319.6			9446.4	
		44%	86654	16.0	12448.8	86.21	7.0	8.2 7.8	6427.2 6021.6			10732.1	
		46%	93757	17.9	13938.6	86.65	6.7	9.2 8.7	7191.6 6747.0			12077.8	
		48%	100934	19.9	15498.6	87.03	6.5	10.3 9.6	8010.6 7488.0			13488.4	
		50%	108168	22.0	17121.0	87.37	6.3	11.4 10.6	8876.4 8244.6			14958.6	
		52%	115435	24.1	18805.8	87.66	6.1	12.6 11.5	9789.0 9016.8			16485.2	
		54%	122711	26.3	20537.4	87.90	6.0	13.8 12.5	10748.4 9789.0			18052.4	
		56%	129969	28.6	22323.6	88.10	5.8	15.1 13.5	11746.8 10576.8			19667.1	
		58%	137180	31.0	24148.8	88.26	5.7	16.4 14.6	12776.4 11372.4			21313.7	
		60%	144313	33.3	26005.2	88.39	5.5	17.7 15.6	13837.2 12168.0			22986.0	
		62%	151335	35.8	27892.8	88.48	5.4	19.1 16.7	14913.6 12979.2			24679.5	
		64%	158213	38.2	29796.0	88.54	5.3	20.5 17.7	16005.6 13790.4			26381.4	
		66%	164913	40.6	31699.2	88.57	5.2	21.9 18.7	17097.6 14601.6			28076.0	
		68%	171400	43.1	33594.6	88.57	5.1	23.3 19.8	18181.8 15412.8			29754.7	
		70%	177638	45.5	35466.6	88.55	5.0	24.7 20.8	19242.6 16224.0			31405.7	
		72%	183594	47.8	37291.8	88.50	4.9	26.0 21.8	20264.4 17027.4			33003.2	
		76%	194519	52.3	40762.8	88.35	4.8	28.4 23.9	22159.8 18603.0			36013.9	
		80%	203908	56.2	43851.6	88.14	4.6	30.5 25.7	23751.0 20100.6			38650.8	
		85%	213116	60.2	46956.0	87.90	4.5	32.3 27.9	25170.6 21785.4			41274.3	
		100%	221745	63.8	49787.4	87.76	4.5	32.9 30.9	25646.4 24141.0			43693.4	

720V上轴负载性能参数


720V Load Performance Parameters of Upper Rotor of Coaxial

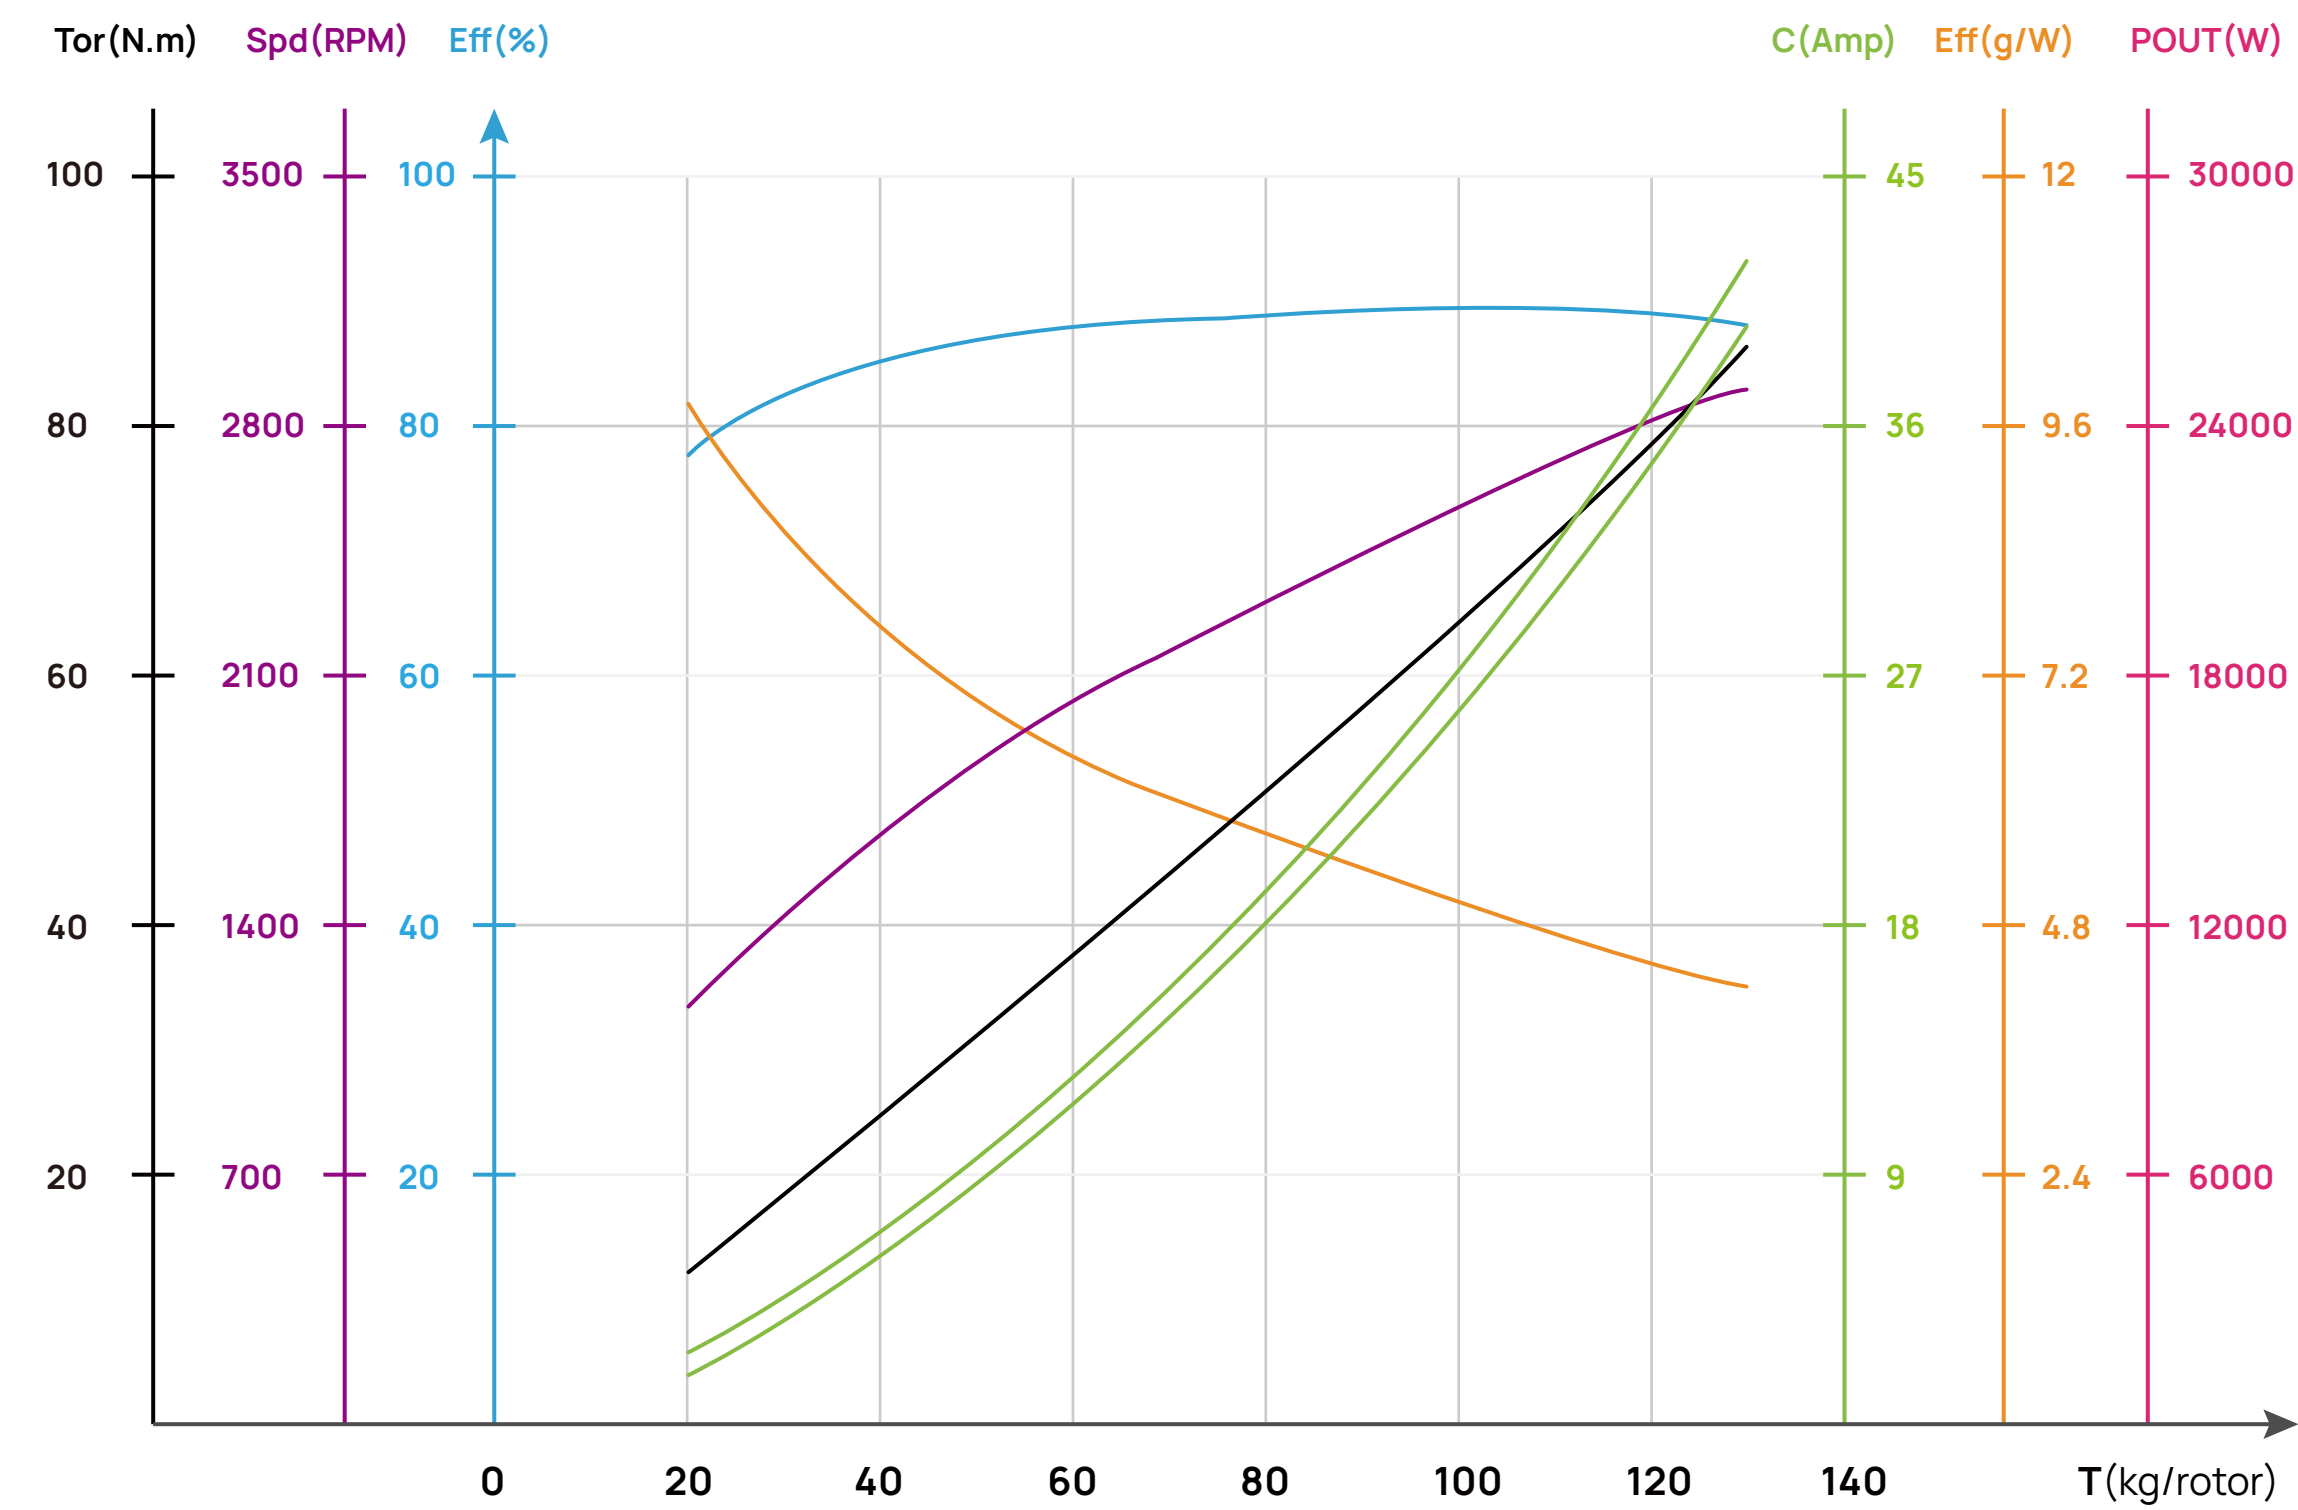

Voltage(V) 工作电压	Propeller 螺旋桨	Throttle(%) 油门	Thrust(g) 拉力	Current(A) 电流	Power Input(W) 输入功率	Speed(RPM) 转速	Efficiency(g/W) 效率	Torque(N·m) 扭矩	Power Output(W) 输出功率	Temperature(℃) 温度
720V	64x26"	38%	34046	5.8	4154.4	1543	8.2	21.59	3488.3	/
		40%	37983	6.7	4824.0	1628	7.9	24.08	4104.9	
		42%	42034	7.7	5558.4	1710	7.6	26.63	4768.3	
		44%	46169	8.8	6336.0	1789	7.3	29.25	5479.4	
		46%	50366	10.0	7164.0	1864	7.0	31.91	6228.3	
		48%	54602	11.2	8035.2	1938	6.8	34.60	7021.4	
		50%	58858	12.4	8942.4	2008	6.6	37.31	7844.9	
		52%	63118	13.7	9885.6	2076	6.4	40.04	8704.0	
		54%	67365	15.1	10857.6	2141	6.2	42.76	9586.3	
		56%	71587	16.5	11858.4	2203	6.0	45.49	10493.7	
		58%	75770	17.9	12880.8	2263	5.9	48.20	11421.6	
		60%	79904	19.3	13917.6	2321	5.7	50.90	12370.6	
		62%	83976	20.8	14968.8	2376	5.6	53.57	13328.0	
		64%	87978	22.3	16041.6	2429	5.5	56.23	14301.9	
		66%	91897	23.8	17121.6	2480	5.4	58.85	15282.5	
		68%	95724	25.3	18201.6	2528	5.3	61.44	16263.9	
		70%	99446	26.8	19288.8	2574	5.2	63.98	17244.5	
		72%	103053	28.3	20383.2	2617	5.1	66.48	18217.6	
		76%	109861	31.3	22536.0	2695	4.9	71.28	20115.1	
		80%	116022	34.2	24624.0	2764	4.7	75.75	21923.9	
		85%	122566	37.5	27007.2	2835	4.5	80.65	23941.6	
		100%	130396	41.9	30139.2	2919	4.3	86.76	26518.6	

720V下轴负载性能参数


720V Load Performance Parameters of Bottom Rotor of Coaxial

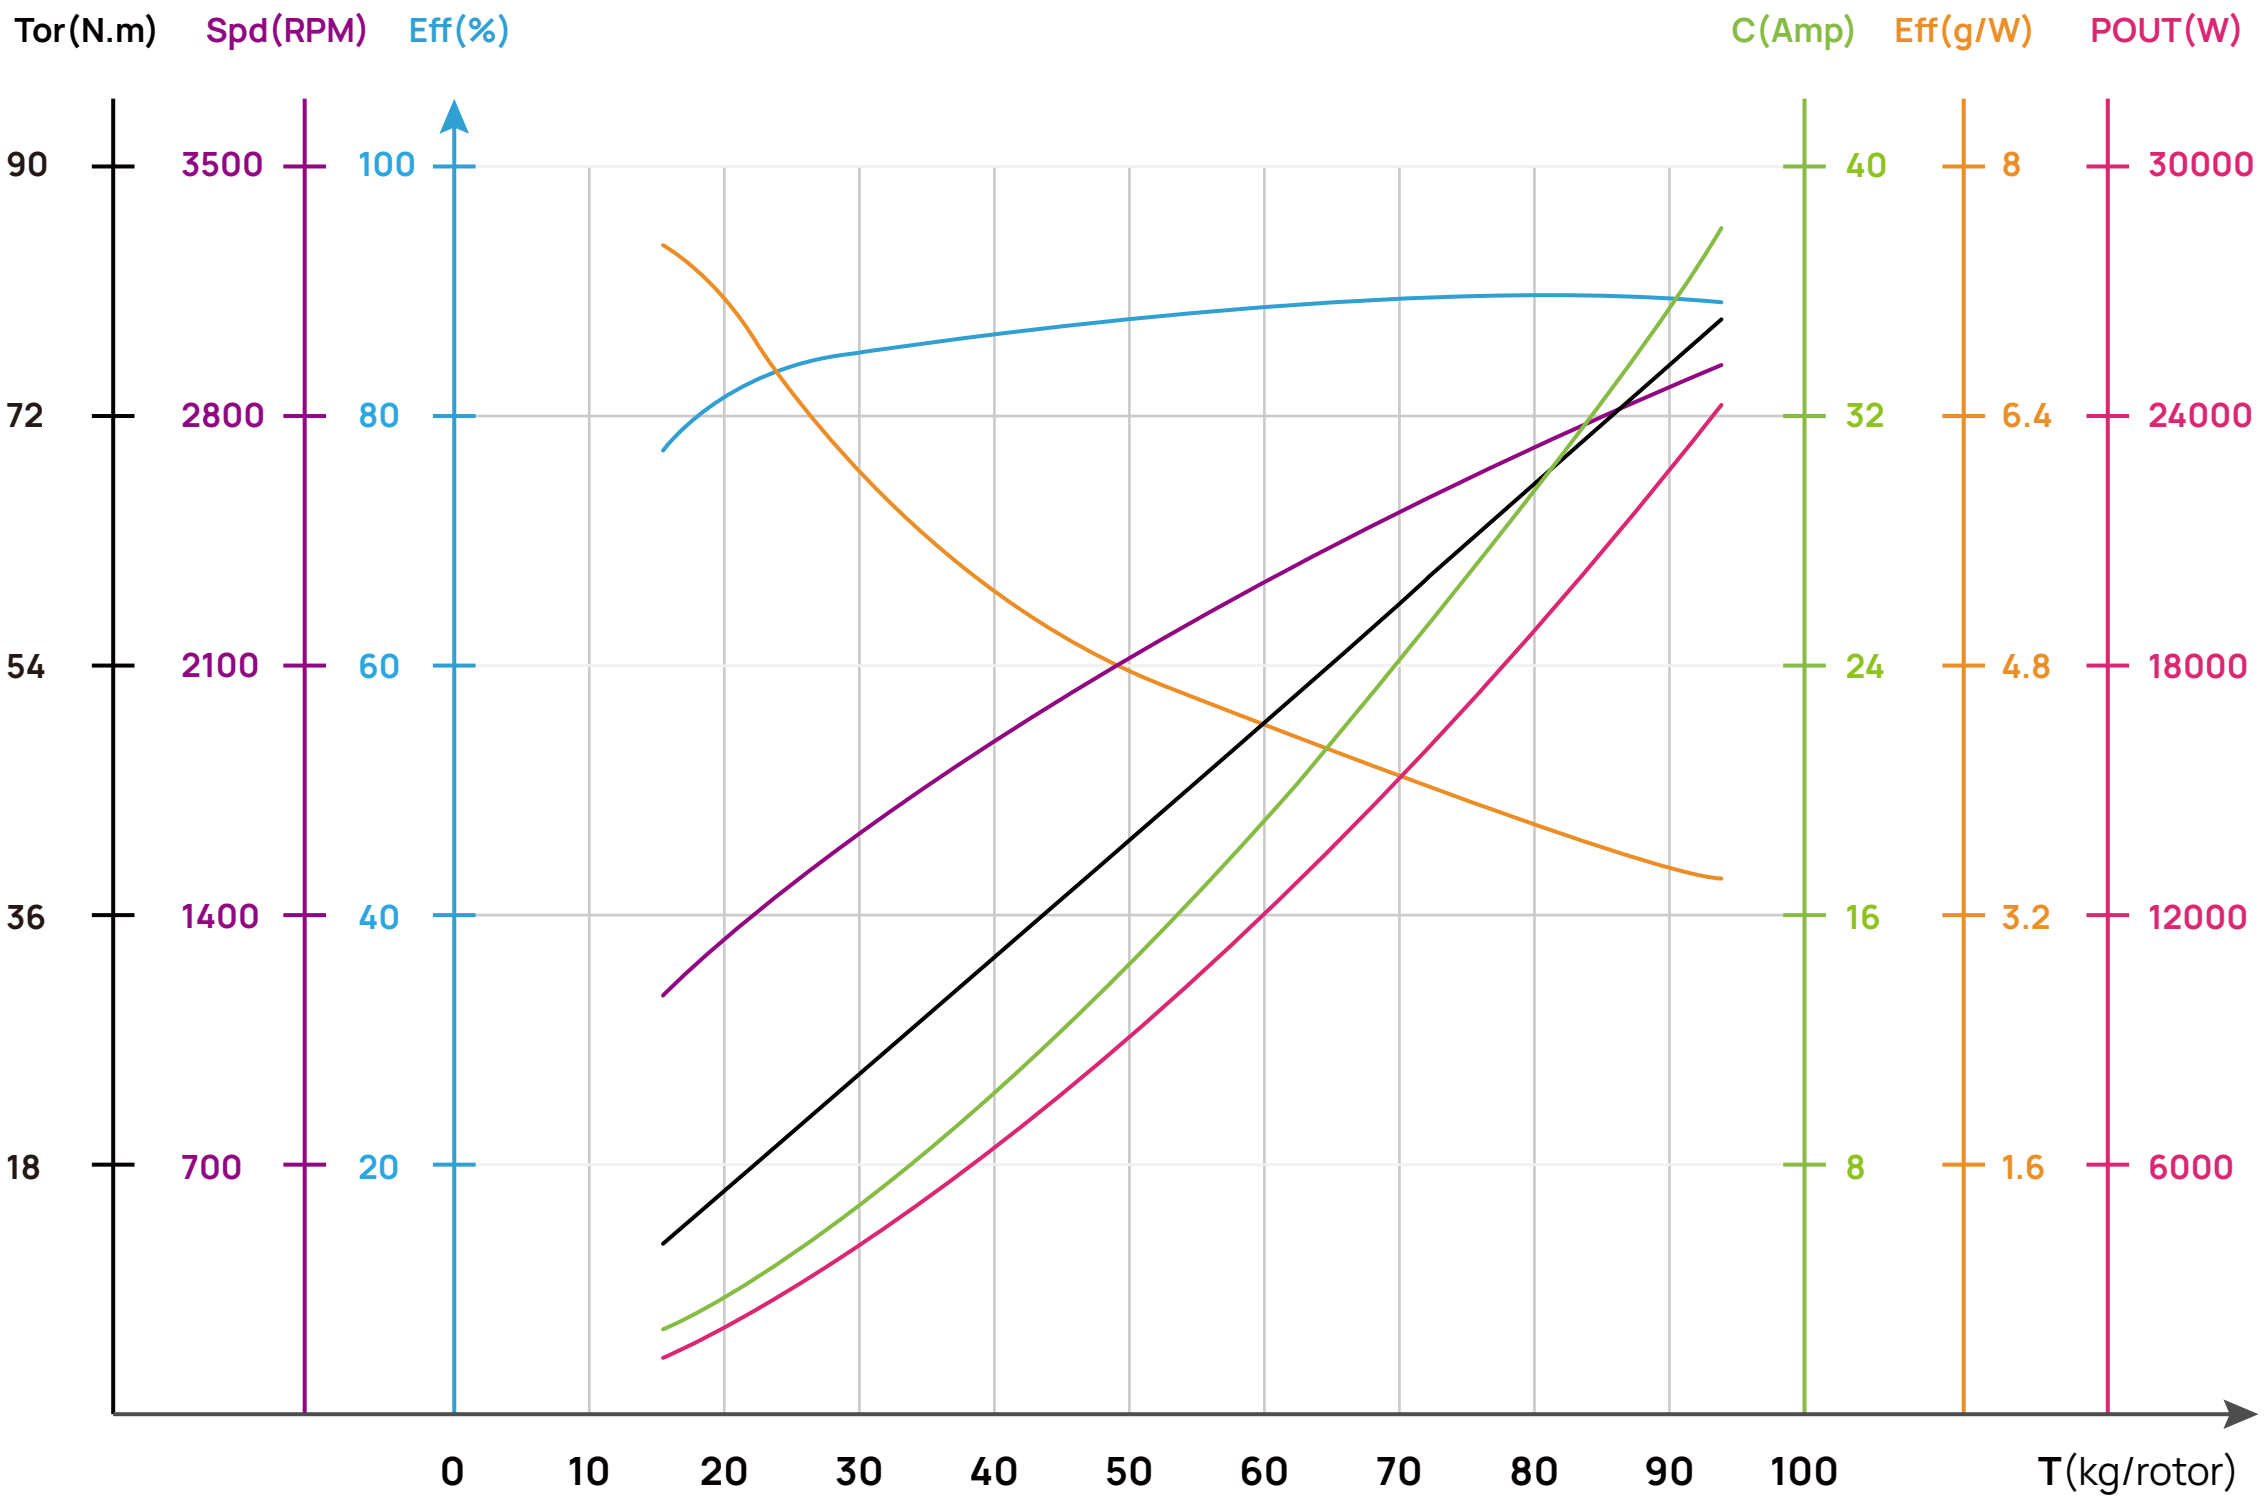

Voltage(V) 工作电压	Propeller 螺旋桨	Throttle(%) 油门	Thrust(g) 拉力	Current(A) 电流	Power Input(W) 输入功率	Speed(RPM) 转速	Efficiency(g/W) 效率	Torque(N·m) 扭矩	Power Output(W) 输出功率	Temperature(℃) 温度
720V	64x26"	38%	26975	6.0	4305.6	1544	6.3	22.30	3605.4	/
		40%	29885	6.9	4996.8	1628	6.0	24.76	4220.9	
		42%	32832	8.0	5738.4	1710	5.7	27.25	4879.3	
		44%	35813	9.0	6508.8	1788	5.5	29.77	5573.7	
		46%	38824	10.2	7315.2	1864	5.3	32.30	6304.4	
		48%	41857	11.3	8157.6	1937	5.1	34.84	7066.5	
		50%	44905	12.5	9014.4	2008	5.0	37.38	7859.6	
		52%	47958	13.8	9907.2	2075	4.8	39.91	8671.5	
		54%	51004	15.0	10814.4	2140	4.7	42.43	9507.9	
		56%	54030	16.3	11750.4	2202	4.6	44.93	10359.8	
		58%	57025	17.6	12700.8	2262	4.5	47.41	11229.5	
		60%	59973	19.0	13672.8	2320	4.4	49.85	12110.2	
		62%	62861	20.4	14659.2	2375	4.3	52.27	12999.1	
		64%	65675	21.7	15652.8	2429	4.2	54.64	13897.4	
		66%	68401	23.1	16653.6	2480	4.1	56.95	14789.1	
		68%	71026	24.5	17647.2	2529	4.0	59.20	15677.2	
		70%	73537	25.9	18633.6	2575	3.9	61.37	16547.4	
		72%	75924	27.2	19591.2	2619	3.9	63.46	17403.3	
		76%	80282	29.7	21412.8	2698	3.7	67.30	19013.1	
		80%	84040	32.0	23032.8	2764	3.6	70.64	20444.9	
		85%	87854	34.3	24717.6	2829	3.6	74.03	21929.9	
		100%	93510	37.8	27230.4	2915	3.4	78.98	24107.5	

720V共轴负载性能参数


720V Load Performance Parameters of Coaxial

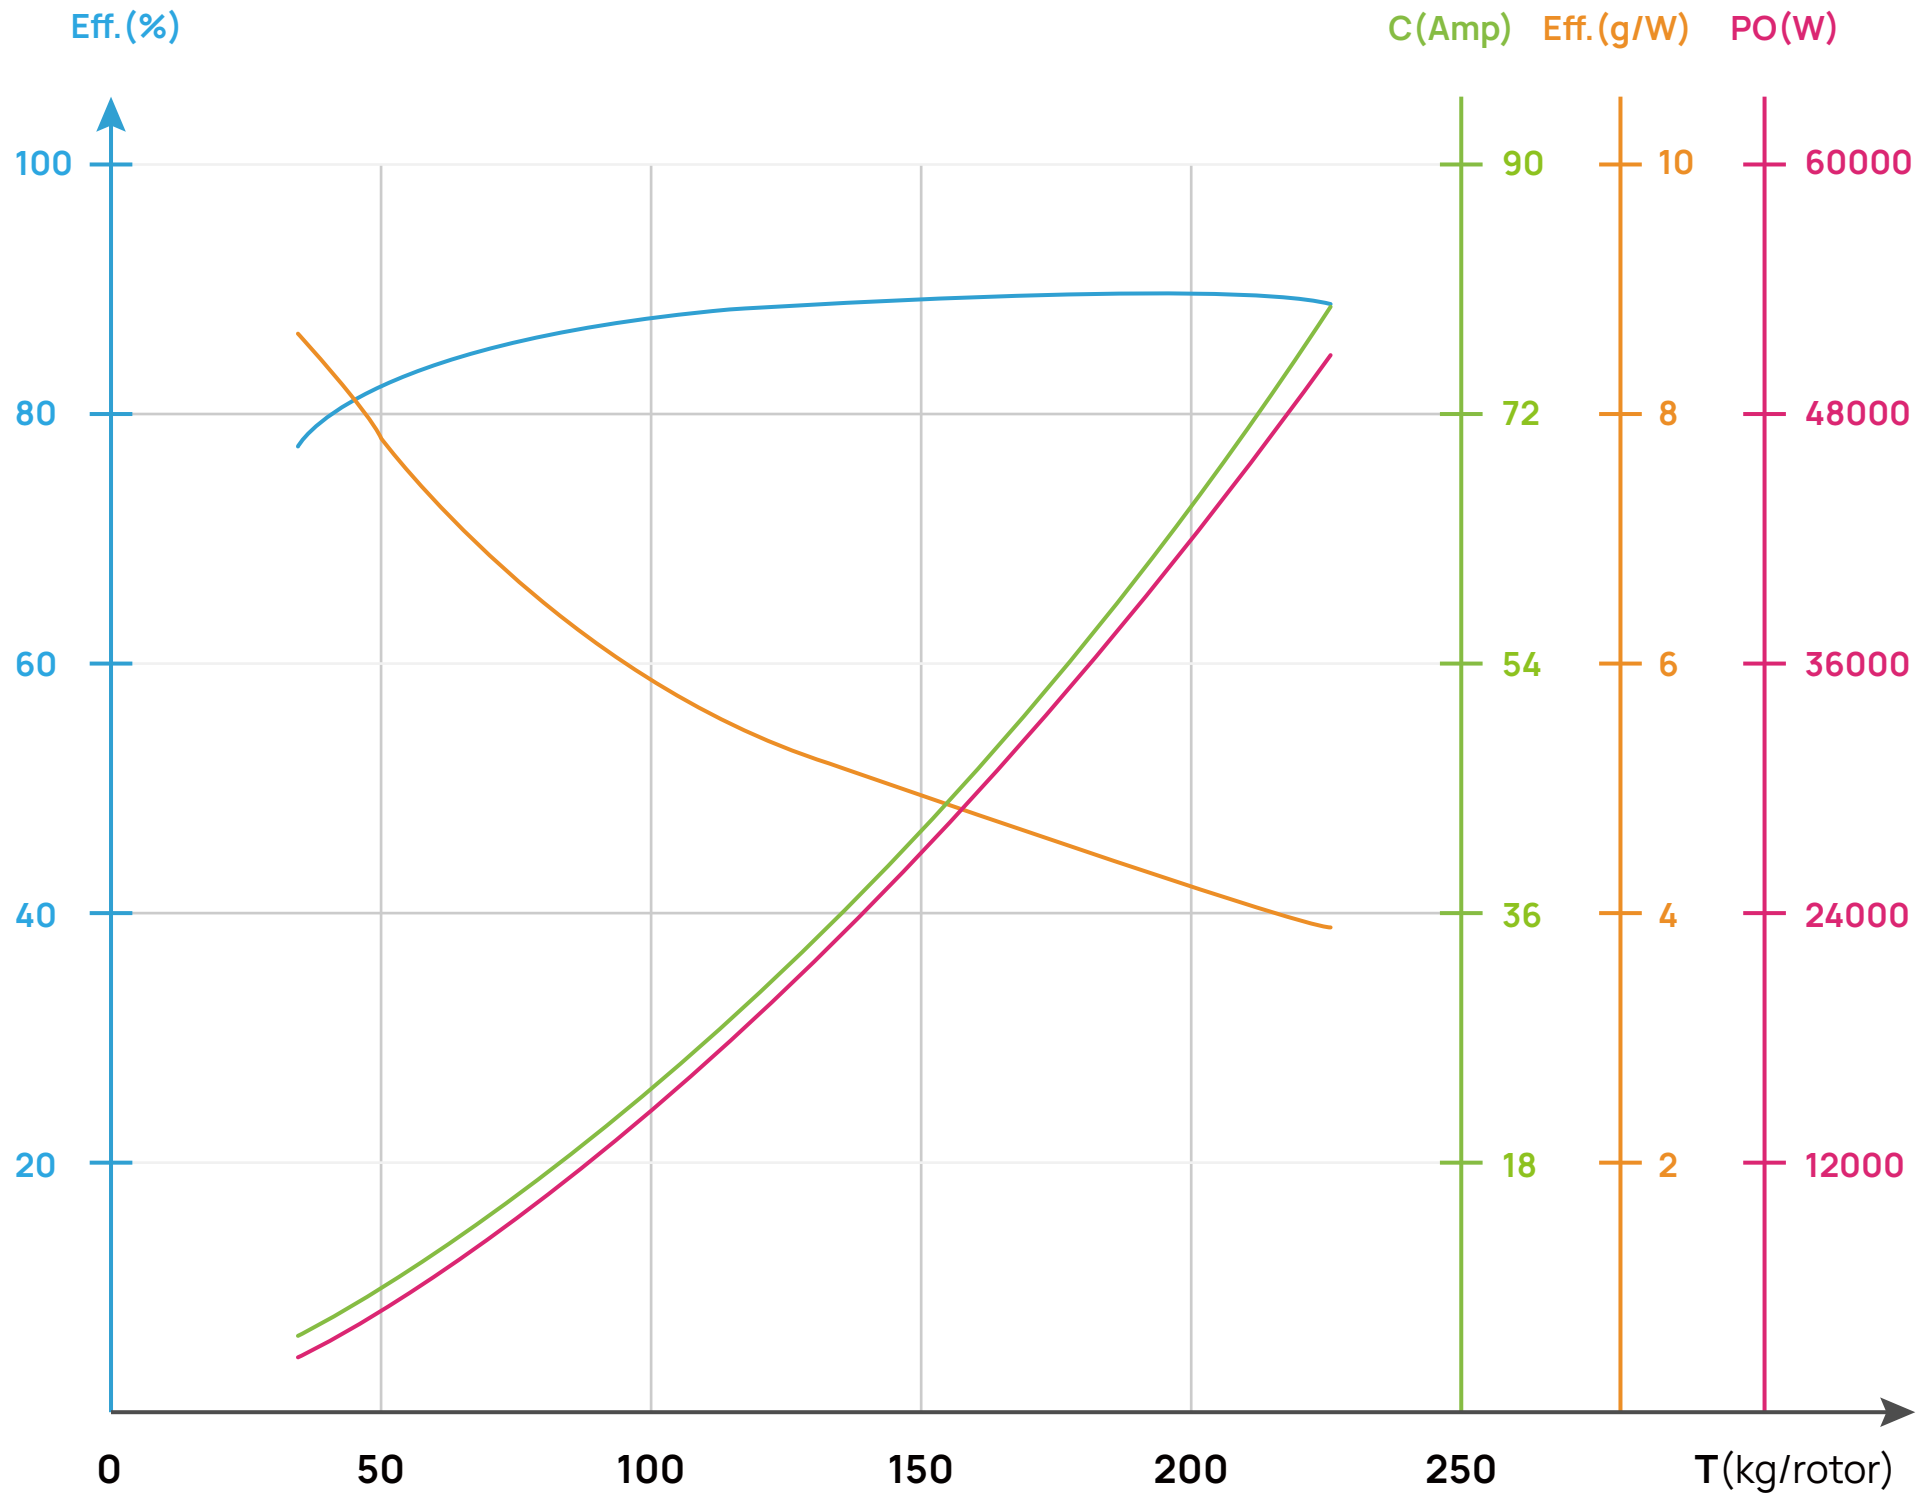

Voltage(V) 工作电压	Propeller 螺旋桨	Throttle(%) 油门	Thrust(g) 拉力	Current(A) 电流	Power Input(W) 输入功率	Efficiency(%) 效率	Efficiency(g/W) 力效	Input Current of Upper Rotor of Coaxial(A) 上轴输入电流	Power Input of Upper Rotor of Coaxial(W) 上轴输入功率	Input Current of Bottom Rotor of Coaxial(A) 下轴输入电流	Power Input of Bottom Rotor of Coaxial(W) 下轴输入功率	Power Output(W) 输出功率	Temperature(°C) 温度
720V	64x26"	38%	61020	11.8	8460.0	83.91	7.2	5.8 6.0	4154.4 4305.6			7098.8	/
		40%	67869	13.7	9828.0	84.73	6.9	6.7 7.0	4824.0 5004.0			8327.3	
		42%	74866	15.7	11296.8	85.43	6.6	7.7 8.0	5558.4 5738.4			9650.9	
		44%	81983	17.8	12844.8	86.04	6.4	8.8 9.0	6336.0 6508.8			11051.7	
		46%	89190	20.1	14479.2	86.57	6.2	10.0 10.1	7164.0 7315.2			12534.6	
		48%	96459	22.5	16185.6	87.04	6.0	11.2 11.3	8035.2 8150.4			14087.9	
		50%	103764	24.9	17956.8	87.44	5.8	12.4 12.5	8942.4 9014.4			15701.4	
		52%	111076	27.5	19792.8	87.80	5.6	13.7 13.8	9885.6 9907.2			17378.1	
		54%	118369	30.1	21672.0	88.10	5.5	15.1 15.0	10857.6 10814.4			19093.0	
		56%	125617	32.8	23601.6	88.36	5.3	16.5 16.3	11858.4 11743.2			20854.4	
		58%	132795	35.5	25581.6	88.57	5.2	17.9 17.6	12880.8 12700.8			22657.6	
		60%	139876	38.3	27590.4	88.74	5.1	19.3 19.0	13917.6 13672.8			24483.7	
		62%	146837	41.2	29628.0	88.88	5.0	20.8 20.4	14968.8 14659.2			26333.4	
		64%	153653	44.0	31694.4	88.98	4.8	22.3 21.7	16041.6 15652.8			28201.7	
		66%	160298	46.9	33775.2	89.05	4.7	23.8 23.1	17121.6 16653.6			30076.8	
		68%	166750	49.8	35856.0	89.10	4.7	25.3 24.5	18201.6 17654.4			31947.7	
		70%	172984	52.7	37922.4	89.12	4.6	26.8 25.9	19288.8 18633.6			33796.4	
		72%	178976	55.5	39974.4	89.12	4.5	28.3 27.2	20383.2 19591.2			35625.2	
		76%	190143	61.0	43948.8	89.05	4.3	31.3 29.7	22536.0 21412.8			39136.4	
		80%	200062	66.2	47656.8	88.92	4.2	34.2 32.0	24624.0 23032.8			42376.4	
		85%	210420	71.8	51724.8	88.69	4.1	37.5 34.3	27007.2 24717.6			45874.7	
		100%	223907	79.7	57362.4	88.27	3.9	41.9 37.8	30139.2 27223.2			50633.8	

780V上轴负载性能参数


780V Load Performance Parameters of Upper Rotor of Coaxial

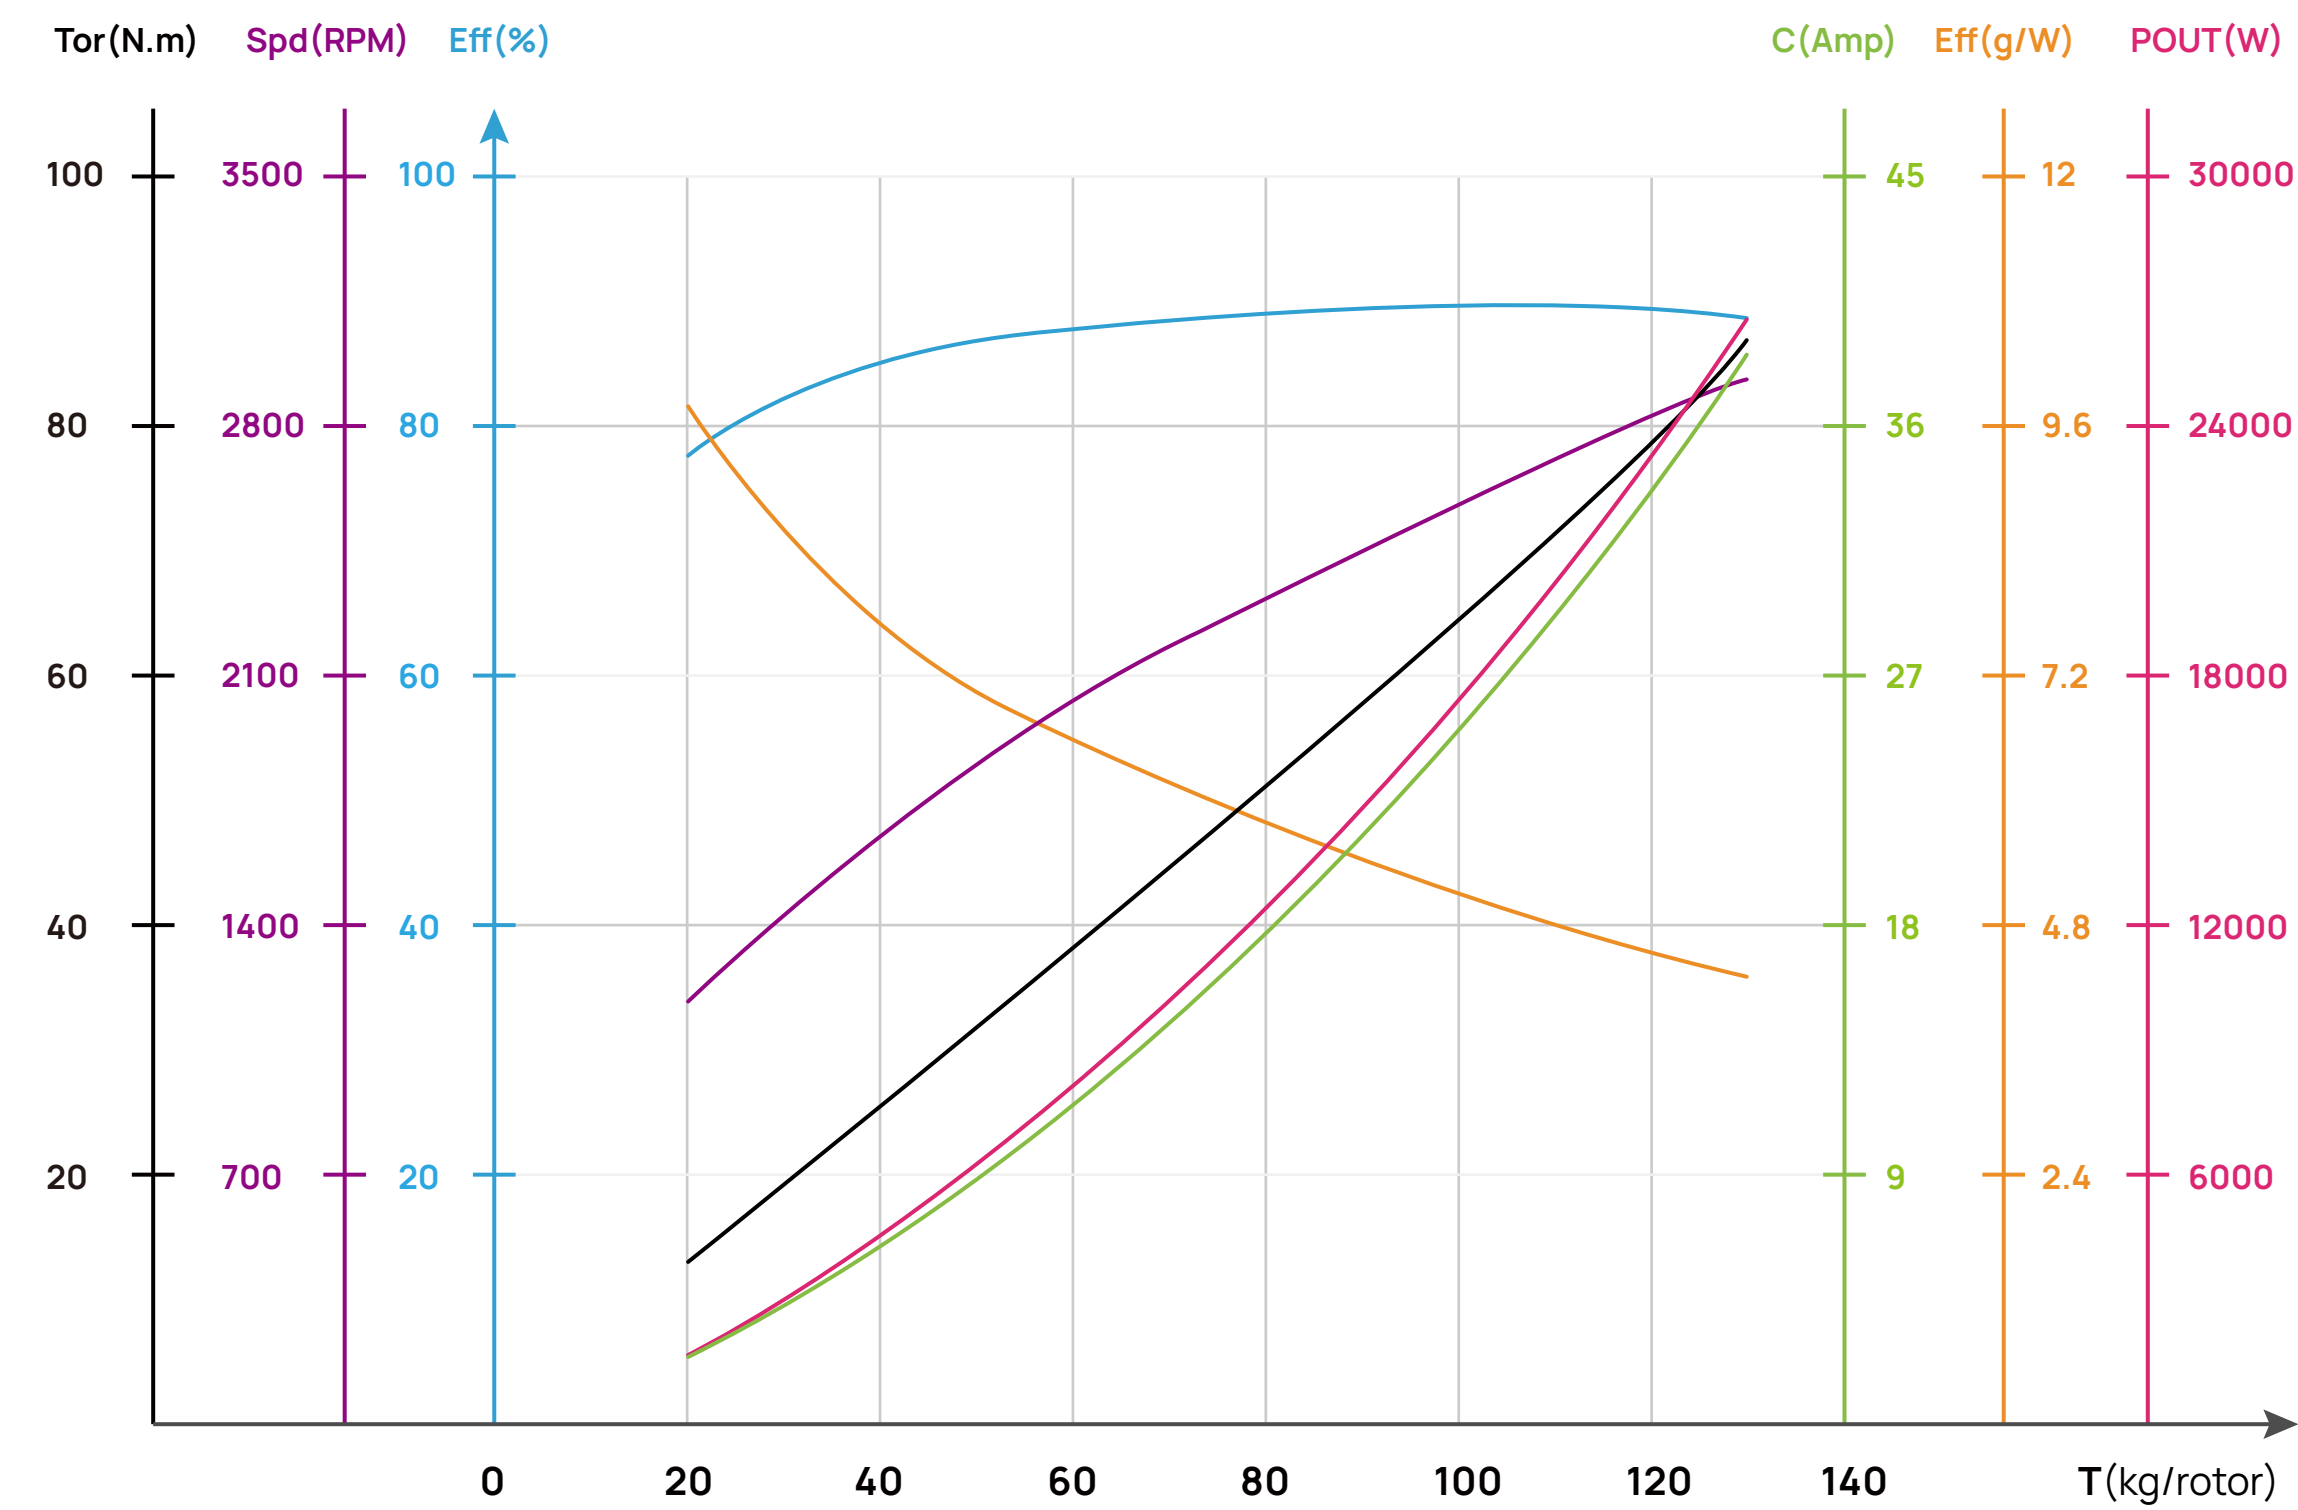

Voltage(V) 工作电压	Propeller 螺旋桨	Throttle(%) 油门	Thrust(g) 拉力	Current(A) 电流	Power Input(W) 输入功率	Speed(RPM) 转速	Efficiency(g/W) 效率	Torque(N·m) 扭矩	Power Output(W) 输出功率	Temperature(℃) 温度
780V	64x26"	38%	34215	5.4	4204.2	1542	8.1	21.75	3511.9	/
		40%	38212	6.3	4890.6	1627	7.8	24.25	4131.4	
		42%	42319	7.2	5631.6	1710	7.5	26.83	4804.1	
		44%	46504	8.2	6427.2	1789	7.2	29.47	5520.6	
		46%	50740	9.3	7261.8	1866	7.0	32.14	6279.9	
		48%	55004	10.4	8135.4	1939	6.8	34.85	7075.8	
		50%	59273	11.6	9048.0	2009	6.6	37.57	7903.5	
		52%	63531	12.8	9991.8	2076	6.4	40.30	8760.5	
		54%	67761	14.1	10966.8	2141	6.2	43.02	9644.6	
		56%	71950	15.3	11957.4	2203	6.0	45.73	10549.0	
		58%	76087	16.6	12963.6	2263	5.9	48.42	11473.8	
		60%	80160	17.9	13993.2	2320	5.7	51.08	12409.0	
		62%	84161	19.3	15038.4	2375	5.6	53.71	13357.2	
		64%	88080	20.6	16083.6	2428	5.5	56.30	14313.8	
		66%	91909	22.0	17144.4	2479	5.4	58.86	15278.9	
		68%	95639	23.4	18213.0	2527	5.3	61.37	16239.0	
		70%	99262	24.7	19281.6	2573	5.1	63.83	17197.3	
		72%	102767	26.1	20350.2	2617	5.0	66.25	18154.6	
		76%	109378	28.8	22479.6	2697	4.9	70.91	20025.6	
		80%	115364	31.5	24531.0	2766	4.7	75.30	21809.4	
		85%	121743	34.5	26894.4	2837	4.5	80.21	23827.8	
		100%	129485	38.5	30030.0	2918	4.3	86.63	26469.8	

780V下轴负载性能参数


780V Load Performance Parameters of Bottom Rotor of Coaxial

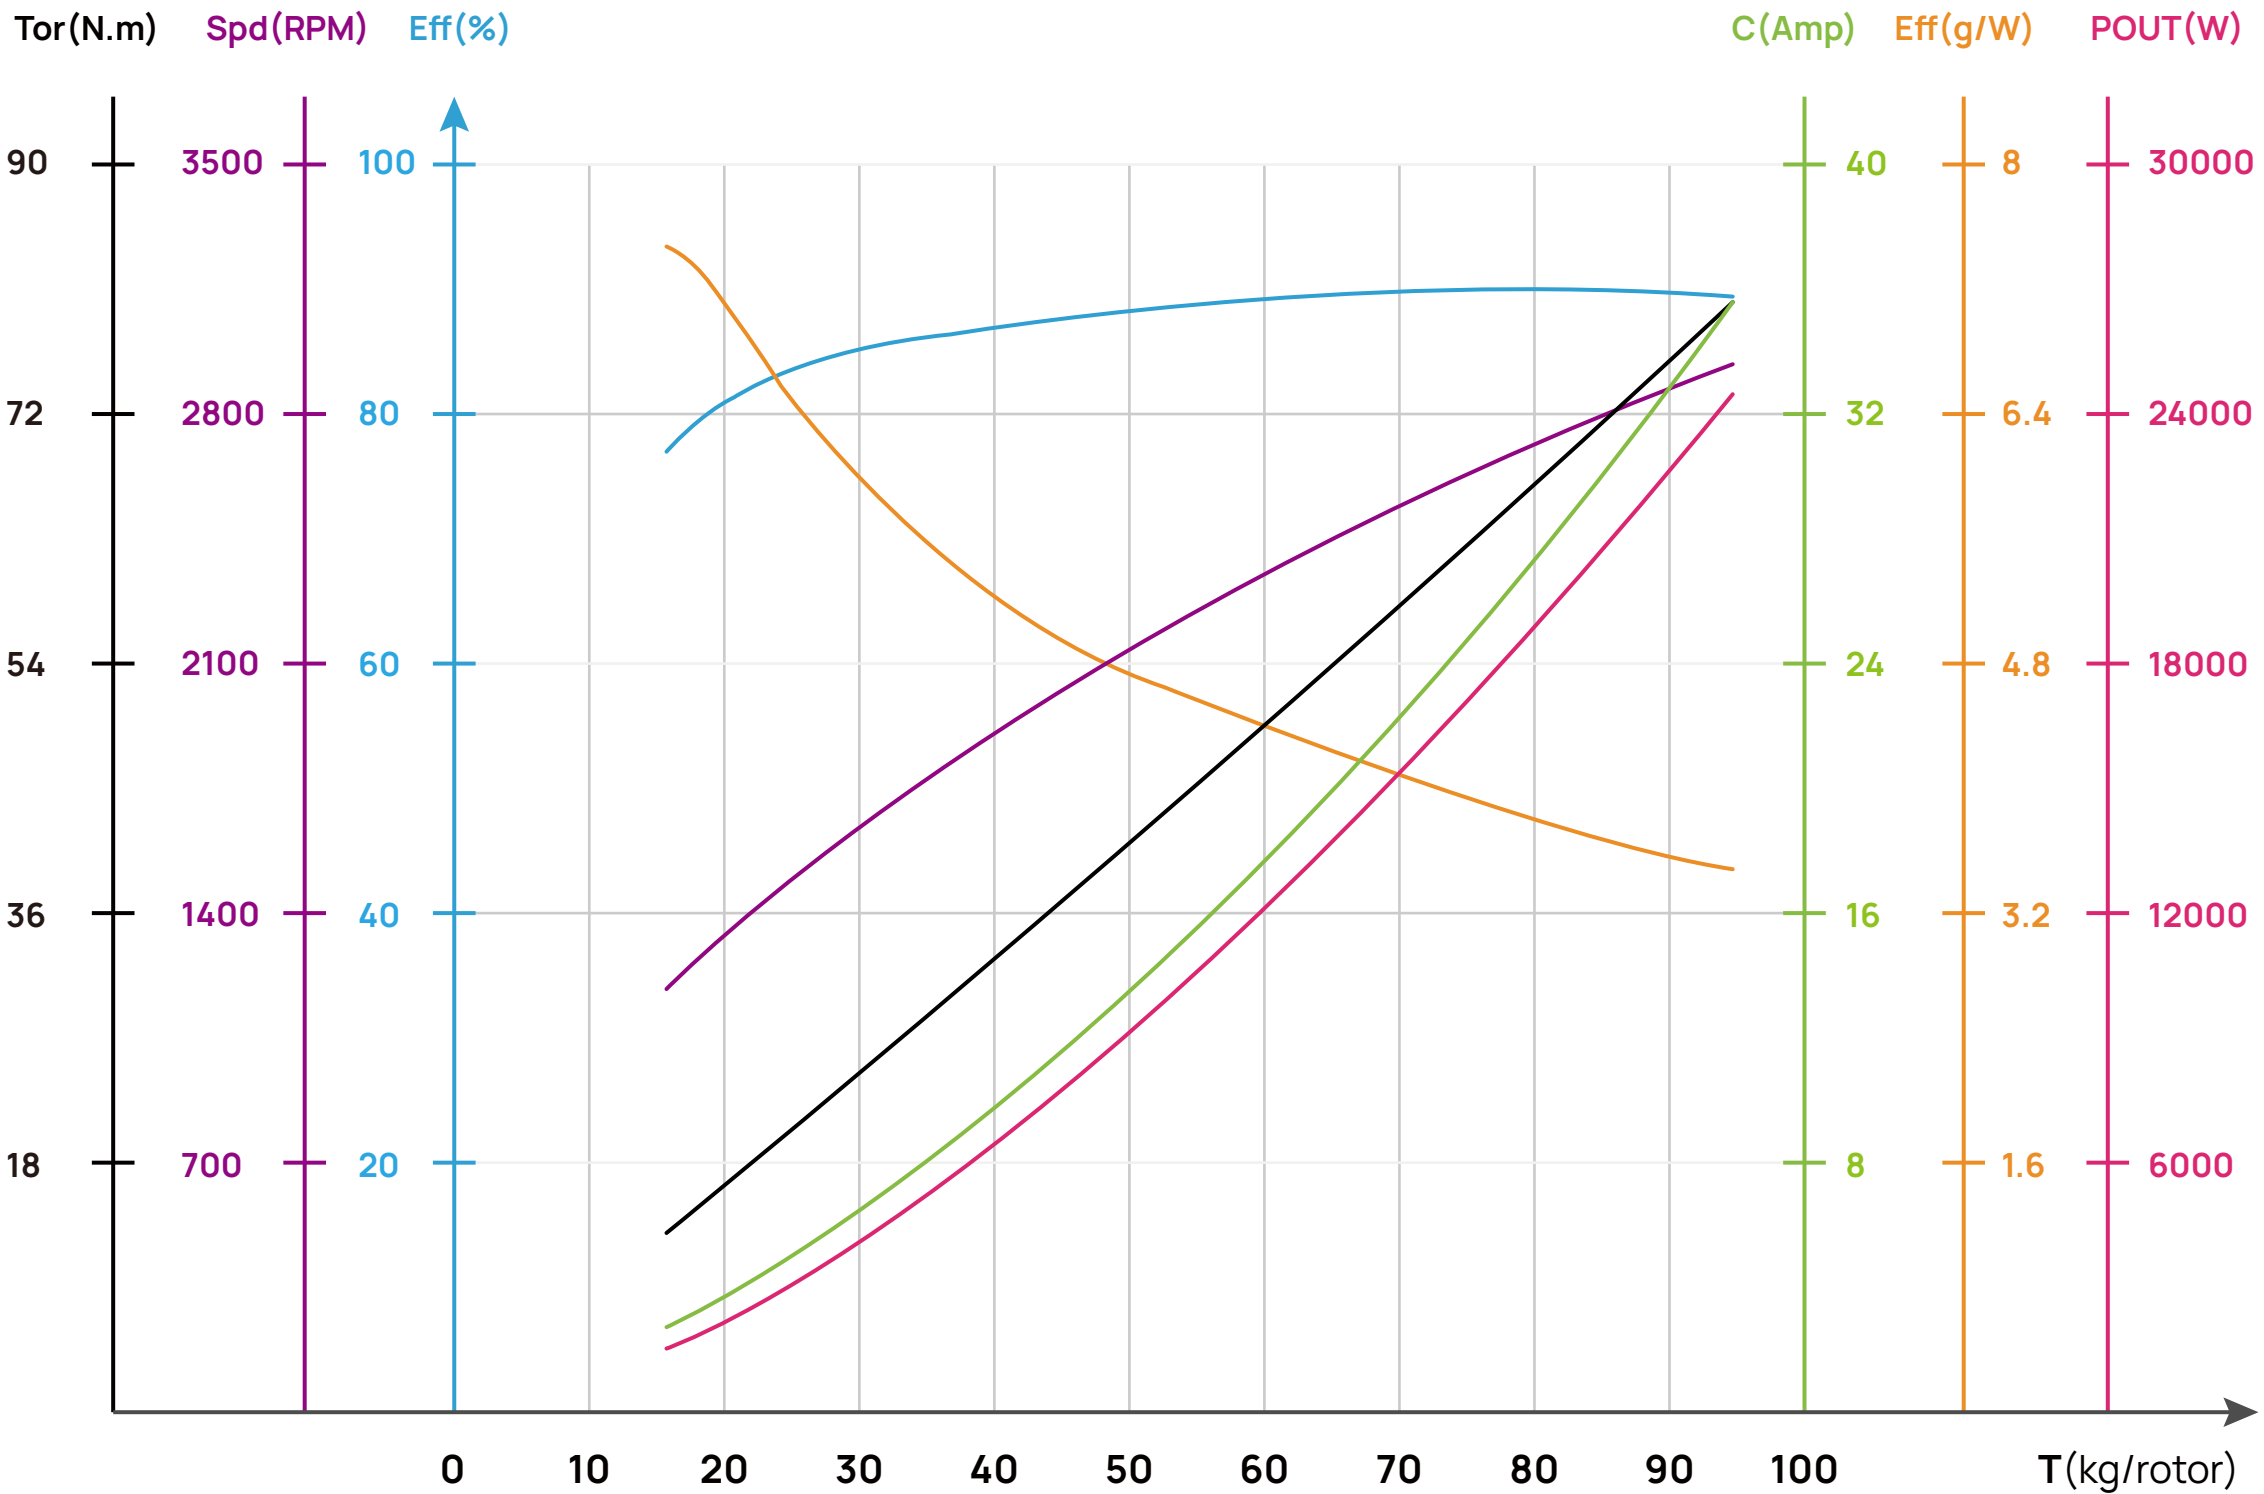

Voltage(V) 工作电压	Propeller 螺旋桨	Throttle(%) 油门	Thrust(g) 拉力	Current(A) 电流	Power Input(W) 输入功率	Speed(RPM) 转速	Efficiency(g/W) 效率	Torque(N·m) 扭矩	Power Output(W) 输出功率	Temperature(°C) 温度
780V	64x26"	38%	26659	5.5	4297.8	1546	6.2	22.14	3584.1	/
		40%	29475	6.4	4976.4	1629	5.9	24.51	4180.8	
		42%	32336	7.3	5694.0	1709	5.7	26.93	4819.2	
		44%	35242	8.3	6458.4	1787	5.5	29.39	5499.5	
		46%	38190	9.3	7254.0	1862	5.3	31.88	6215.8	
		48%	41175	10.4	8080.8	1935	5.1	34.40	6970.1	
		50%	44191	11.5	8938.8	2005	4.9	36.93	7753.4	
		52%	47227	12.6	9835.8	2073	4.8	39.47	8567.7	
		54%	50273	13.8	10748.4	2139	4.7	42.02	9411.6	
		56%	53317	15.0	11692.2	2202	4.6	44.55	10272.2	
		58%	56345	16.2	12651.6	2263	4.5	47.08	11156.2	
		60%	59342	17.5	13634.4	2321	4.4	49.58	12049.8	
		62%	62294	18.8	14632.8	2377	4.3	52.04	12952.8	
		64%	65186	20.1	15646.8	2431	4.2	54.47	13865.6	
		66%	68002	21.4	16660.8	2483	4.1	56.84	14778.4	
		68%	70726	22.7	17674.8	2532	4.0	59.15	15682.5	
		70%	73346	24.0	18681.0	2578	3.9	61.38	16569.4	
		72%	75846	25.2	19663.8	2622	3.9	63.53	17442.5	
		76%	80437	27.6	21528.0	2700	3.7	67.50	19083.8	
		80%	84417	29.8	23205.0	2765	3.6	70.97	20547.9	
		85%	88450	32.0	24944.4	2828	3.5	74.50	22061.4	
		100%	94016	35.1	27370.2	2907	3.4	79.38	24163.1	

780V共轴负载性能参数

780V Load Performance Parameters of Coaxial

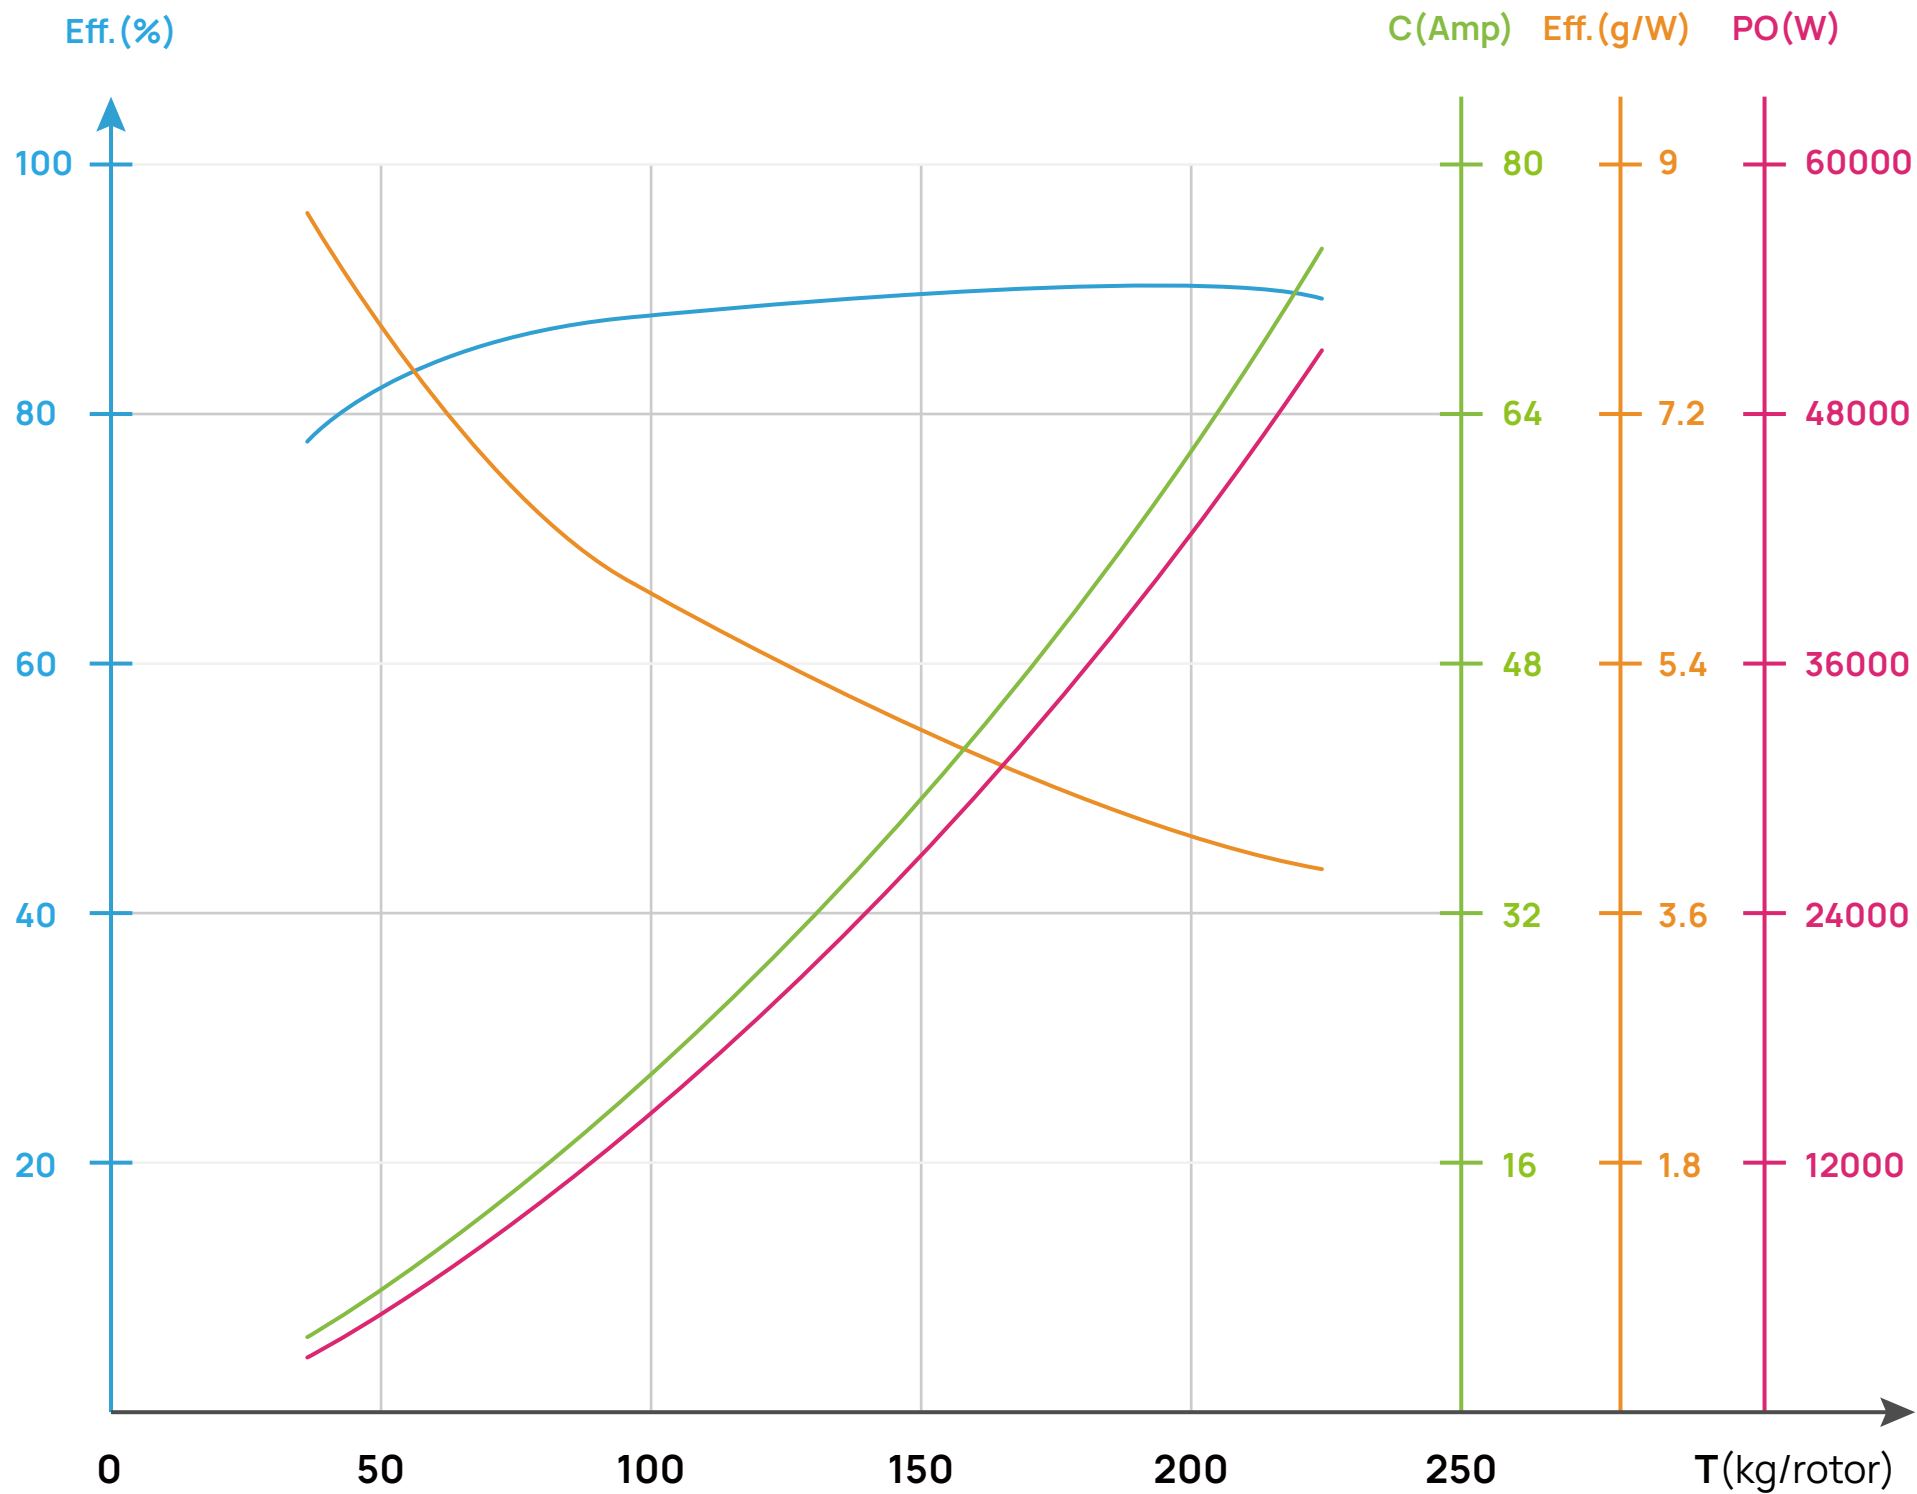

Voltage(V) 工作电压	Propeller 螺旋桨	Throttle(%) 油门	Thrust(g) 拉力	Current(A) 电流	Power Input(W) 输入功率	Efficiency(%) 效率	Efficiency(g/W) 力效	Input Current of Upper Rotor of Coaxial(A) 上轴输入电流	Power Input of Upper Rotor of Coaxial(W) 上轴输入功率	Input Current of Bottom Rotor of Coaxial(A) 下轴输入电流	Power Input of Bottom Rotor of Coaxial(W) 下轴输入功率	Power Output(W) 输出功率	Temperature(°C) 温度
780V	64x26"	38%	60875	10.9	8502.0	83.46	7.2	5.4 5.5	4204.2 4297.8			7095.8	/
		40%	67688	12.7	9867.0	84.28	6.9	6.3 6.4	4890.6 4976.4			8315.9	
		42%	74655	14.5	11325.6	84.97	6.6	7.2 7.3	5631.6 5694.0			9623.4	
		44%	81746	16.5	12877.8	85.57	6.3	8.2 8.3	6427.2 6450.6			11019.5	
		46%	88930	18.6	14515.8	86.11	6.1	9.3 9.3	7261.8 7254.0			12499.6	
		48%	96179	20.8	16224.0	86.59	5.9	10.4 10.4	8135.4 8088.6			14048.4	
		50%	103464	23.1	17994.6	87.03	5.7	11.6 11.5	9048.0 8946.6			15660.7	
		52%	110758	25.4	19827.6	87.42	5.6	12.8 12.6	9991.8 9835.8			17333.3	
		54%	118034	27.8	21715.2	87.76	5.4	14.1 13.7	10966.8 10748.4			19057.3	
		56%	125267	30.3	23649.6	88.07	5.3	15.3 15.0	11957.4 11692.2			20828.2	
		58%	132431	32.9	25623.0	88.33	5.2	16.6 16.3	12963.6 12659.4			22632.8	
		60%	139502	35.4	27627.6	88.54	5.0	17.9 17.5	13993.2 13634.4			24461.5	
		62%	146455	38.0	29671.2	88.70	4.9	19.3 18.7	15038.4 14632.8			26318.4	
		64%	153266	40.7	31730.4	88.83	4.8	20.6 20.1	16083.6 15646.8			28186.1	
		66%	159911	43.3	33805.2	88.91	4.7	22.0 21.3	17144.4 16660.8			30056.2	
		68%	166366	46.0	35887.8	88.96	4.6	23.4 22.6	18213.0 17674.8			31925.8	
		70%	172608	48.7	37962.6	88.97	4.5	24.7 24.0	19281.6 18681.0			33775.3	
		72%	178612	51.3	40014.0	88.96	4.5	26.1 25.2	20350.2 19663.8			35596.5	
		76%	189815	56.4	44007.6	88.87	4.3	28.8 27.6	22479.6 21528.0			39109.6	
		80%	199781	61.2	47743.8	88.73	4.2	31.5 29.7	24531.0 23212.8			42363.1	
		85%	210193	66.5	51838.8	88.53	4.1	34.5 32.0	26894.4 24944.4			45892.9	
		100%	223501	73.6	57408.0	88.21	3.9	38.5 35.1	30030.0 27378.0			50639.6	