


# VSC 42x16.5

## 技术参数 Specification

|                                   |                                      |                                           |                        |
|-----------------------------------|--------------------------------------|-------------------------------------------|------------------------|
| 产品型号<br>Model                     | VSC 42x16.5                          | 单支重量<br>Weight                            | 255±15 g               |
| 主要材质<br>Material of Props         | 碳纤维+环氧树脂<br>Carbon fiber+Epoxy resin | 表面工艺<br>Surface technics                  | 哑光磨砂<br>Matte abrazine |
| 存储温度<br>Storage temperature       | -10℃~35 ℃                            | 使用环境温度<br>Operating Temperature           | -40℃~65 ℃              |
| 最佳转速范围<br>Recommended speed range | 2000~3000 RPM                        | 存储湿度<br>Storage humidness                 | ≤85 %                  |
| 极限拉力<br>Ultimate tension          | 60 kg                                | 常用拉力范围<br>Recommended thrust              | 20~30 kg               |
| 直桨/折叠桨<br>Folding/unfolding       | 直桨<br>unfolding                      | 推荐搭配电机<br>Recommended motors of hobbywing | V11122 / V11130        |

## 尺寸图 Dimension Figure

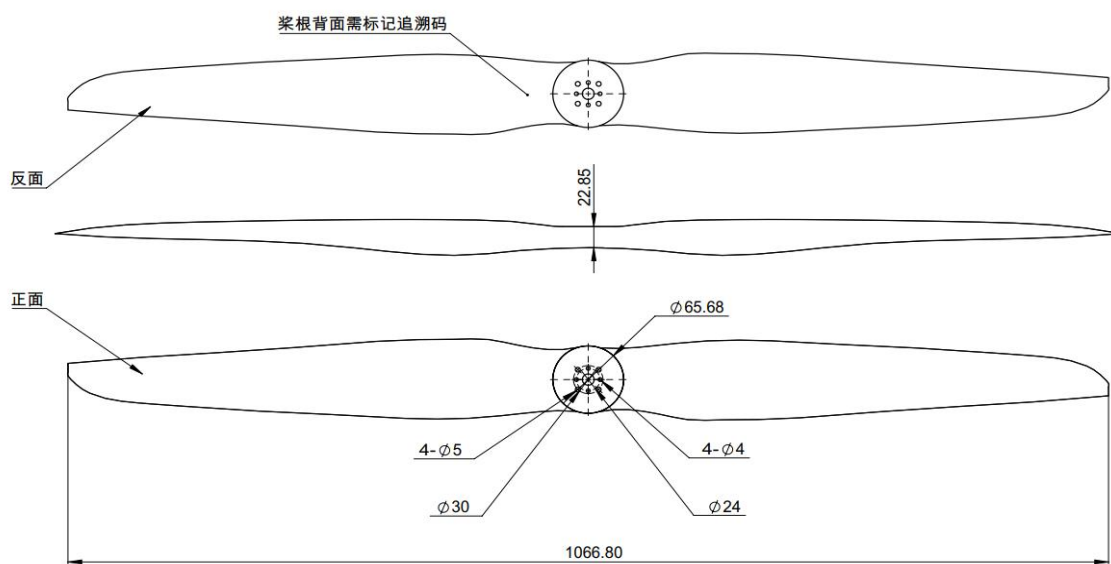

## 转速、拉力、扭矩测试数据 Speed, thrust and torque test data

