




LOAD PERFORMANCE PARAMETERS

负载性能参数

以下数据为好盈实验室于室温 25°C、海平面高度，变化油门输入调节测得，仅供参考。
The above data is measured by HobbyWing laboratory at room temperature 25°C,
sea level, change the throttle input adjustment, for reference only.

720V共轴负载性能参数


720V Load Performance Parameters of Coaxial

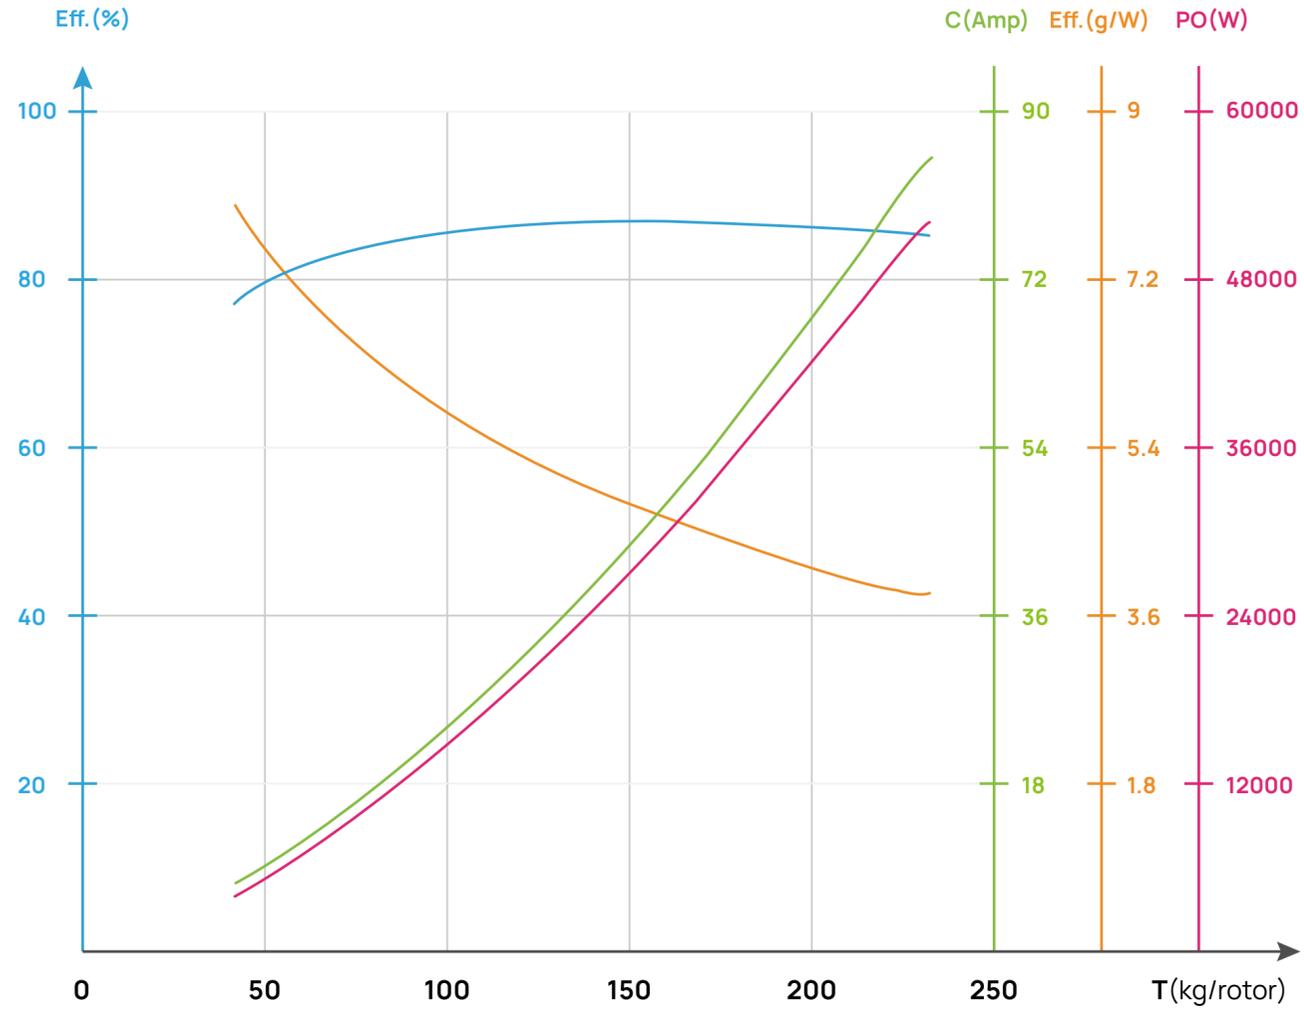

Voltage(V) 工作电压	Propeller 螺旋桨	Throttle(%) 油门	Thrust(g) 拉力	Current(A) 电流	Power Input(W) 输入功率	Efficiency(%) 效率	Efficiency(g/W) 力效	Power Output(W) 输出功率	Temperature(°C) 温度
720V	MSC 64x23-P	38%	61545	12.2	8811.4	81.71	7.0	7199.8	/
		40%	68571	14.2	10231.4	82.68	6.7	8459.3	
		42%	75786	16.3	11761.6	83.45	6.4	9815.0	
		44%	83145	18.6	13394.0	84.08	6.2	11261.7	
		46%	90608	21.0	15120.9	84.61	6.0	12793.8	
		48%	98138	23.5	16934.0	85.05	5.8	14402.3	
		50%	105702	26.1	18825.0	85.43	5.6	16082.2	
		52%	113268	28.9	20786.0	85.76	5.4	17826.0	
		54%	120810	31.7	22809.2	86.04	5.3	19625.1	
		56%	128302	34.6	24887.7	86.28	5.2	21473.1	
		58%	135720	37.5	27014.5	86.47	5.0	23359.4	
		60%	143042	40.5	29182.8	86.61	4.9	25275.2	
		62%	150248	43.6	31385.4	86.70	4.8	27211.2	
		64%	157316	46.7	33614.5	86.74	4.7	29157.2	
		66%	164229	49.8	35861.2	86.74	4.6	31106.0	
		68%	170965	52.9	38115.6	86.69	4.5	33042.4	
		70%	177506	56.1	40366.6	86.61	4.4	34961.5	
		72%	183832	59.2	42602.2	86.50	4.3	36850.9	
		76%	195750	65.2	46973.1	86.20	4.2	40490.8	
		80%	206531	71.0	51106.0	85.89	4.0	43895.0	
85%	218072	77.3	55686.3	85.56	3.9	47645.2			
100%	232534	84.6	60885.1	85.17	3.8	51855.9			

780V共轴负载性能参数

780V Load Performance Parameters of Coaxial

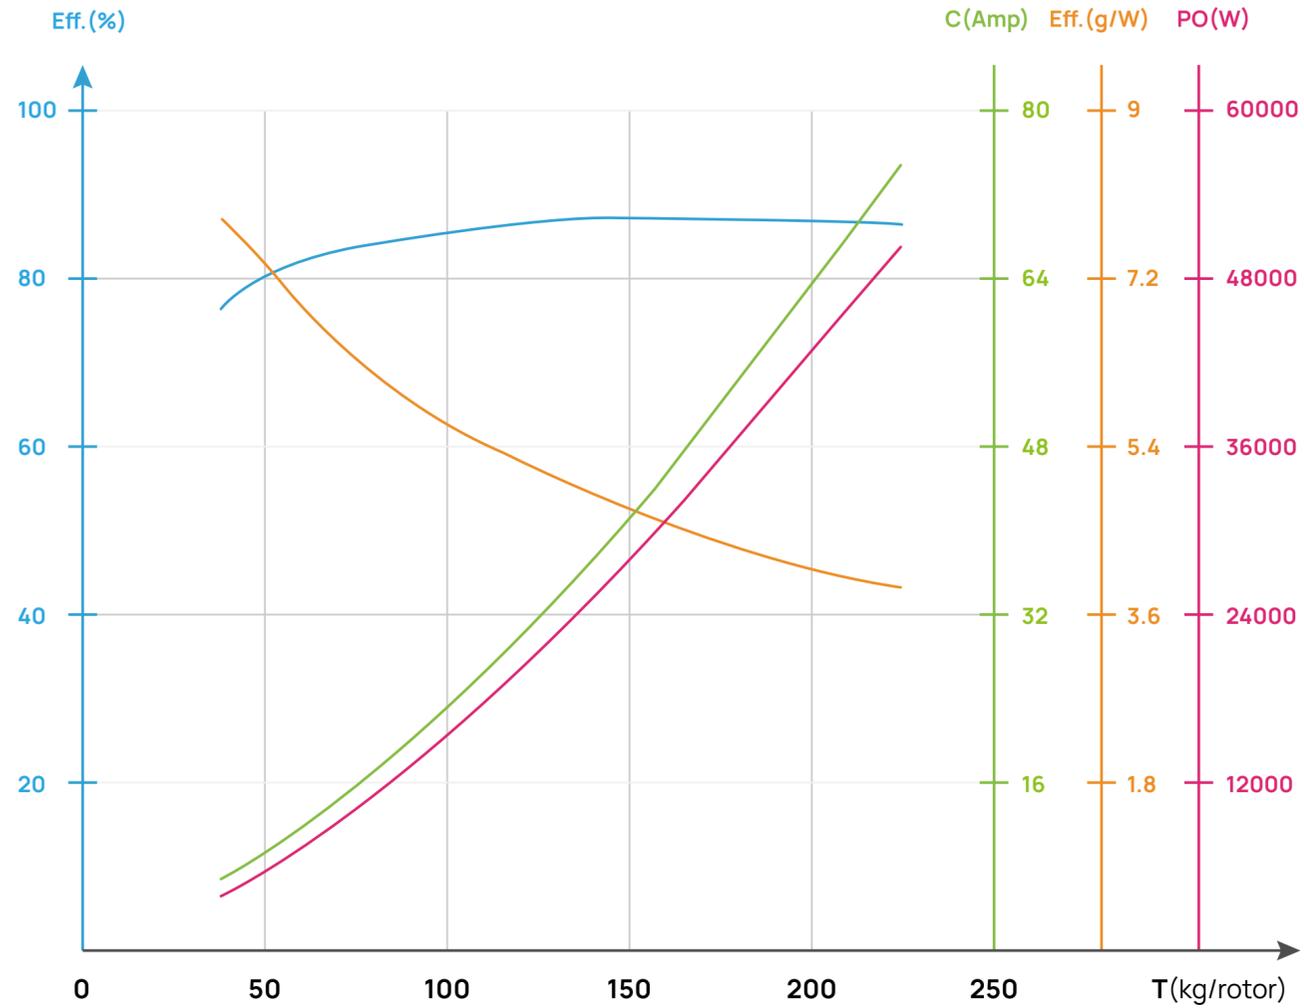

Voltage(V) 工作电压	Propeller 螺旋桨	Throttle(%) 油门	Thrust(g) 拉力	Current(A) 电流	Power Input(W) 输入功率	Efficiency(%) 效率	Efficiency(g/W) 力效	Power Output(W) 输出功率	Temperature(°C) 温度
780V	MSC 64x23-P	38%	59358	10.9	8487.7	81.46	7.0	6914.1	/
		40%	65978	12.6	9827.6	82.33	6.7	8091.1	
		42%	72724	14.4	11264.5	83.06	6.5	9356.3	
		44%	79600	16.4	12791.6	83.70	6.2	10706.6	
		46%	86598	18.5	14403.2	84.28	6.0	12139.1	
		48%	93707	20.6	16094.7	84.81	5.8	13649.9	
		50%	100908	22.9	17862.5	85.29	5.6	15234.9	
		52%	108179	25.3	19703.7	85.72	5.5	16890.0	
		54%	115491	27.7	21615.7	86.09	5.3	18608.9	
		56%	122815	30.3	23595.5	86.39	5.2	20384.2	
		58%	130115	32.9	25638.9	86.63	5.1	22211.0	
		60%	137358	35.6	27739.4	86.80	5.0	24077.8	
		62%	144506	38.3	29888.0	86.92	4.8	25978.7	
		64%	151522	41.1	32072.5	86.98	4.7	27896.7	
		66%	158370	43.9	34277.3	87.01	4.6	29824.7	
		68%	165015	46.8	36484.0	86.99	4.5	31737.5	
		70%	171424	49.6	38672.1	86.95	4.4	33625.4	
		72%	177566	52.3	40819.4	86.90	4.4	35472.1	
		76%	188951	57.6	44906.2	86.76	4.2	38960.6	
		80%	199014	62.3	48592.9	86.61	4.1	42086.3	
85%	209661	67.3	52501.7	86.44	4.0	45382.5			
100%	225554	74.5	58146.4	86.21	3.9	50128.0			