




LOAD PERFORMANCE PARAMETERS

负载性能参数

以下数据为好盈实验室于室温 25°C、海平面高度，变化油门输入调节测得，仅供参考。

The below data was measured by HOBBYWING Laboratory at room temperature 25°C, at sea level,
with varying throttle input, for reference only.

V13828-92V & 45x18

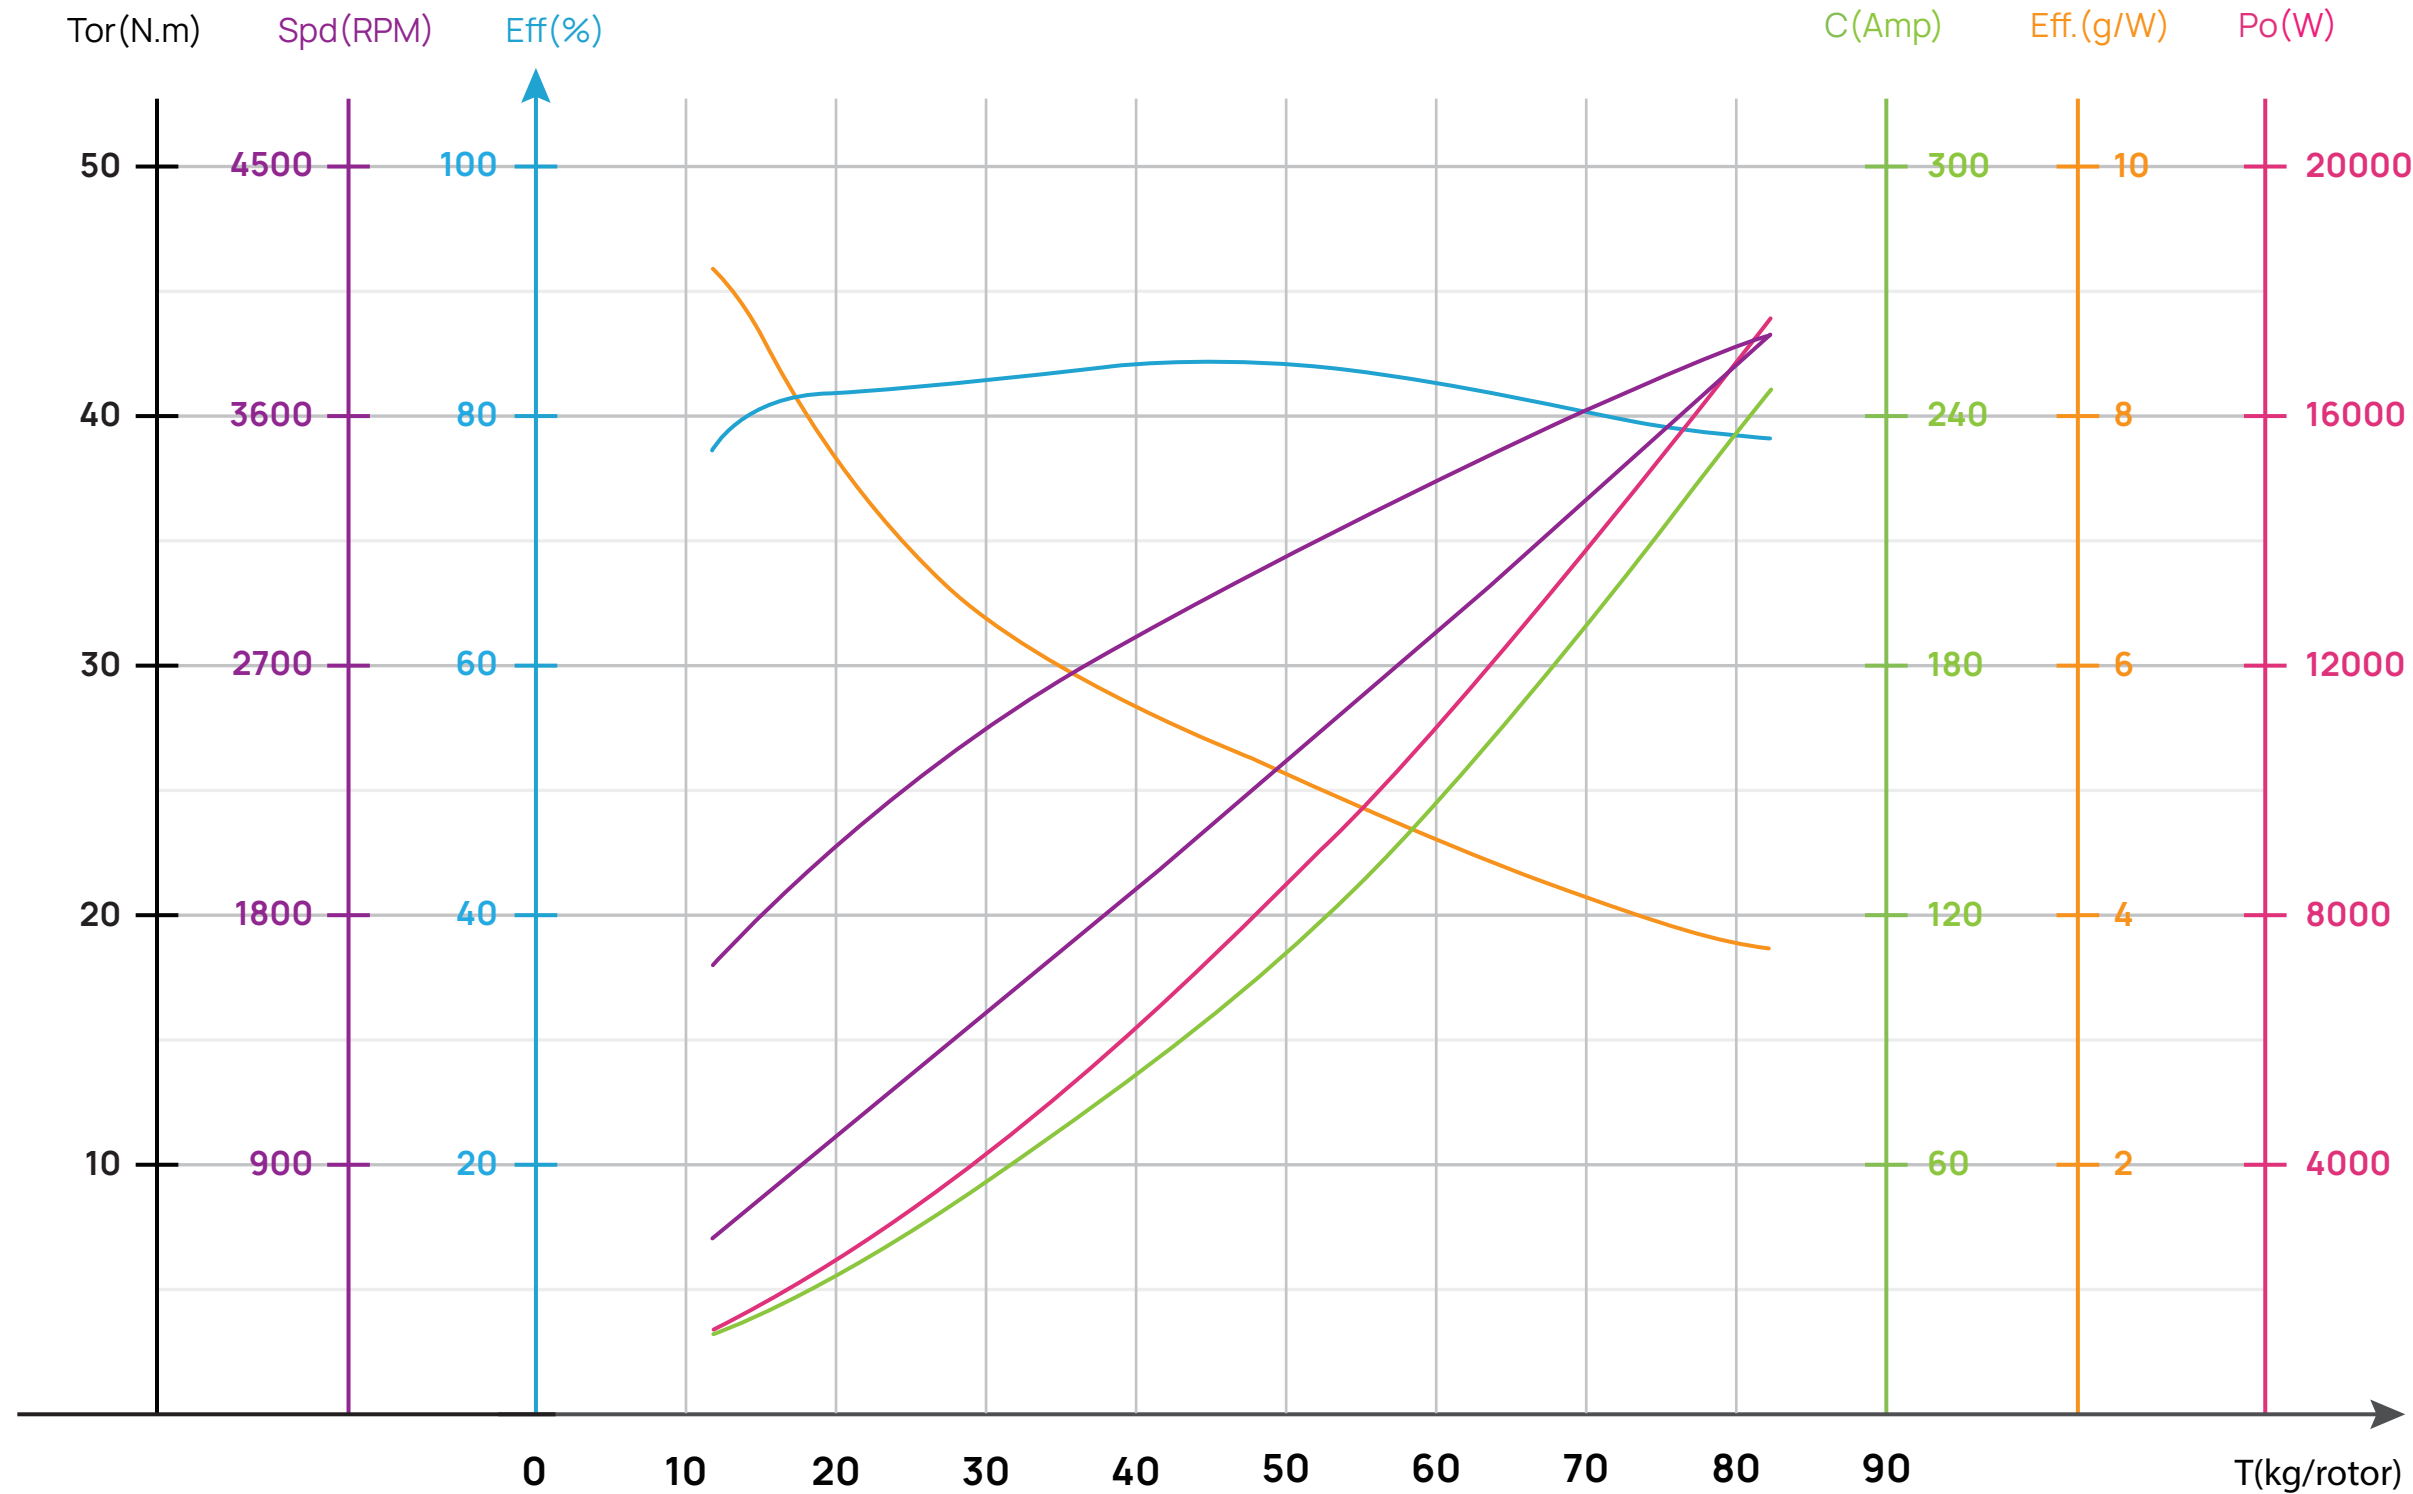

Voltage 工作电压 (V)	Propeller 螺旋桨	Throttle 油门 (%)	Thrust 拉力 (g)	Current 电流 (A)	Power Input 输入功率 (W)	Speed 转速 (RPM)	Efficiency 力效 (g/W)	Torque 扭矩 (N·m)	Power Output 输出功率 (W)	Temperature 电机温度 (°C)
92V 24S LiPo	45x18	33%	12997	15.6	1432.3	1606	9.1	6.63	1114.1	/
		35%	14335	17.6	1619.3	1684	8.9	7.29	1285.6	
		37%	15859	20.2	1855.5	1769	8.5	8.06	1492.6	
		39%	17520	23.2	2137.0	1858	8.2	8.90	1732.4	
		42%	20186	28.6	2631.4	1993	7.7	10.28	2145.0	
		45%	22981	34.7	3192.6	2126	7.2	11.73	2611.4	
		48%	25847	41.3	3801.5	2252	6.8	13.23	3118.6	
		51%	28756	48.3	4445.6	2373	6.5	14.74	3663.1	
		54%	31705	55.7	5120.7	2487	6.2	16.28	4238.8	
		57%	34711	63.4	5830.3	2596	6.0	17.84	4848.7	
		60%	37800	71.6	6584.4	2703	5.7	19.44	5501.3	
		63%	41007	80.5	7398.7	2808	5.5	21.10	6202.9	
		66%	44365	90.2	8293.9	2912	5.3	22.84	6963.2	
		69%	47900	101.1	9294.5	3018	5.2	24.68	7798.6	
		72%	51627	113.4	10426.8	3126	5.0	26.64	8718.6	
		75%	55539	127.4	11714.1	3235	4.7	28.72	9728.0	
		78%	59607	143.2	13169.6	3345	4.5	30.92	10829.1	
		81%	63767	160.7	14783.5	3455	4.3	33.20	12012.6	
		84%	67921	179.5	16509.8	3562	4.1	35.52	13247.6	
		87%	71924	198.5	18256.0	3661	3.9	37.76	14475.9	
90%	75583	216.2	19885.6	3748	3.8	39.80	15620.9			
100%	81662	244.9	22524.6	3878	3.6	43.09	17498.6			